

The background image shows a large stack of light-colored wooden panels, likely cross-laminated timber (CLT). The panels have a distinct wavy or undulating pattern across their surface, created by the way they are laminated from multiple layers of wood. Some dark knots are visible in the wood grain.

# 100 PROJECTS UK CLT



Published in 2018

Produced by Waugh Thistleton Architects on behalf of the  
Softwood Lumber Board & Forestry Innovation Investment  
Printed in Canada

Text © Waugh Thistleton Architects

Photographs © as stated

Drawings © architects of each project or Waugh Thistleton Architects unless  
otherwise stated

All rights reserved

No part of this publication may be reproduced without the written permission  
of the publisher or the copyright owner

Special thanks to the CLT providers, engineers, consultants, contractors and  
developers for their assistance and expertise, without whom this publication  
would not have been possible:

Arup	Atelier Ten
B & K Structures	Binderholz
Change Building	Egoin
Eurban	Gardiner & Theobald
Hastings Pier Charity	Hackney Council
Jerram Falkus	Kier Eastern
KLH UK	Lendlease
Mace	Ramboll
School of Engineering, University of Edinburgh	Stora Enso
Zublin Timber	



# FOREWORD

While cross-laminated timber (CLT) appears to be finally entering the mainstream, there is considerable inertia in the construction industry that impedes the greater adoption of this truly innovative material. The benefits are clear - building in timber is quick, clean, and easy. It can be achieved with a measured accuracy and lack of noise, waste, or need for material storage space. It has notable benefits in terms of warmth, acoustics, and structural efficiency. In a world ever more concentrated in urban areas, timber is the basis for safe and healthy cities composed of exceptionally designed and responsibly constructed buildings.

The only surprise to us is that the uptake in mass timber has not been faster. Historically there has been a lack of interest in developing construction technology - a serious problem for our field, and for the world at large. If one reflects on the massive demand for housing, the fact that our industry is responsible for such huge energy use and consequent carbon emissions worldwide, and the tremendous influence our industry has over the overall GDP of the United States and all nations, the question is obvious: Why are we not encouraging governments and the building industry world wide to invest in solutions that will solve the problems that affect our society as a whole? And beyond that, can we afford not to?

If we're going to solve big problems within the architectural realm, our society needs to invest in finding solutions. There is no singular voice or all-powerful entity that defines our profession's response to the greatest challenges of our time. As a result, we need to amass our voices and generate a change of attitude towards research and innovation into construction.

The work illustrated in this book is the product of a few committed professionals who have labored to prove to clients, contractors, and authorities that any code requirements that are met by concrete and steel can be met and exceeded by timber. These projects start to demonstrate a timber architecture with its own form of expression, perhaps one that will inspire more of our contemporaries to take a step towards solid timber.

Image: Binderholz sawmill, Austria © Waugh Thistleton Architects



# CONTENTS

<b>ACKNOWLEDGEMENTS</b>	11
<b>INTRODUCTION</b>	13
CLT	14
History	15
Manufacture	16
The Timber	17
Forestry	18
CLT BUILDINGS IN THE UK	20
<b>BENEFITS</b>	27
LIFE-CYCLE ANALYSIS	28
Circularity – End of Life Scenarios	30
REDUCING CARBON INTENSIVE MATERIALS	32
Frame Substitution	32
Reduced Foundations	33
Reduced Secondary Structure and Finishes	33
STRENGTH AND RESILIENCE	34
Fire	35
Seismic Activity and Explosions	35
BENEFITS IN CONSTRUCTION	36
Speed	36
Waste and Logistics	38
Health and Safety on Site	39
HEALTH AND WELLBEING	40
DESIGN FLEXIBILITY AND AESTHETICS	41

Image: Spruce logs, Austria © Waugh Thistleton Architects

<b>DESIGN FACTORS</b>	45
OPTIMIZING	46
Structural Principles	46
Material Efficiency	47
Cutting and Routing	47
Transportation Considerations	48
Hybrid Solutions	50
MATERIALITY	52
Exposed Timber	52
Cladding	52
Water	54
Ventilating the Timber	55
PROCESS	56
Finalizing the Design	56
Building Information Modelling	57
Competitive Tendering	58
<b>MATERIAL PERFORMANCE</b>	61
FIRE	62
Legislation	63
Dealing with Fire Authorities	63
Flammability / Pyrolysis	64
Fire Performance	65
Spread of Flame	65
Connections	66
Sprinklers and Other Suppressive Systems	66
Conductivity	68
Mass	68
THERMAL PERFORMANCE	68
Dynamic Response	69
Air Tightness and Accuracy	70
ACOUSTICS	71
Vibration	73

<b>SITE FACTORS</b>	77
OPTIMIZATION	78
Sequencing	78
Ground Works	78
Installation	78
Program Overlap	79
Back-to-Back Processes	79
Lightweight	80
MATERIAL SAVINGS	80
Primary Structure	81
Exposing CLT	81
Delays	82
Deliveries	82
Weather	82
MITIGATING COMMON ISSUES	82
Water	83
Sunlight	83
FIRE	84
Off-Site	85
INSURANCE	86
 <b>POST COMPLETION</b>	91
MORTGAGES & SALEABILITY	92
Building Warranties	93
INSURANCE	93
Fire	95
Water	95
MAINTENANCE AND REPAIRS	95
 <b>CASE STUDIES</b>	99
 <b>CONCLUSION</b>	313
 <b>GLOSSARY</b>	315
 <b>METHODOLOGY</b>	319
 <b>BIBLIOGRAPHY</b>	321

With thanks to the architects/engineers of the  
100 schemes for their generous contributions:

5th Studio  
6a Architects  
ABIR Architects  
Arboreal Architecture  
ACME  
Adam Knibb Architects  
Adam Richards Architects  
Adjaye Associates  
Allford Hall Monaghan Morris  
Archer Architects  
Archetype  
Arup  
Aukette Swanke  
Avanti Architects  
Baynes and Mitchell  
BDP  
Bennetts Associates  
Berman Guedes Stretton  
Burrell Foley Fischer  
Cullinan Studio  
David Grindley Architects  
David Miller Architects  
Dow Jones Architects

# ACKNOWLEDGEMENTS

dRMM  
DSDHA  
Duggan Morris Architects  
Erect Architecture  
Fairhursts Design Group  
Feilden Clegg Bradley Studios  
Feilden Fowles Architects  
Groupwork + Amin Taha  
Hale Brown Architects  
Hampson Williams  
Hawkins\Brown  
Haworth Tompkins  
Hayhurst and Co.  
Henley Halebrown Architects  
Hewitt Studios  
Hodder + Partners  
Horden Cherry Lee Architects  
Hugh Strange Architects  
Jeremy Bailey Architects  
Jestico + Whiles  
John Pardey Architects  
Karakusevic Carson Architects  
Kay Hartmann Architects  
  
Levitate  
LSI Architects  
Malcolm Fraser Architects  
Matthew Lloyd Architects  
Meadowcroft Griffin Architects  
Mole Architects  
Mosley and Mann  
Nicholas Hare Architects  
Penoyre & Prasad  
Pringle Richards Sharratt  
Quay 2c Architects  
Rundell Associates  
Sarah Wigglesworth Architects  
Saville Jones Architects  
Sheppard Robson  
Softroom Limited  
Spheron Architects  
TECTONICS Architects  
Theis and Khan Architects  
Tonkin Liu  
Urban Projects Bureau  
Waugh Thistleton Architects  
WilkinsonEyre  
Wilkinson King



# INTRODUCTION

The world is in the midst of a housing crisis with a global mass migration to cities. The UN predicts that 66% of the world's population will be resident in urban areas by 2050.<sup>1</sup> In order to deal with this flow of people, the way housing is delivered in our cities needs to be addressed with more high density, mid-to-high rise buildings required.

The implications of this in terms of climate change are considerable while urban structures are predominately built in steel and concrete. The production and use of cement is responsible for approximately 8% of the world's CO<sub>2</sub> emissions,<sup>2</sup> a figure that will increase if urban construction trends continue.

At the same time a gradual decline in construction productivity over the past 50 years presents further challenges in meeting the growing demand for homes.<sup>3</sup>

Timber, nature's own building material, is both replenishable and sustainable, offering an alternative way of meeting the growing housing demand. If we build in timber, as opposed to traditional materials with high levels of embodied carbon, we can save an average of 45 tons (40 tonnes) of CO<sub>2</sub> per dwelling.<sup>4</sup> At a global scale this can make a vital difference.

Traditionally, timber has not been used for high density buildings. However, the recent development of mass timber products has enabled timber to compete structurally at scale. Highly engineered products that overcome many of the issues associated with traditional timber frame have put wood construction back in the running.

This report sets out a study into 100 of the most significant buildings constructed from CLT in the United Kingdom over the past 15 years. We have contacted a wide range of individuals and businesses to interview them about their experiences building in CLT. The opinions have been collated and the findings set out in these chapters. Following these we have appended details of the 100 projects from the study and the names of the consultants, contractors and clients involved.

Image: Softwood forest, Austria © Waugh Thistleton Architects

## CLT

The emergence of cross-laminated timber (CLT) over the last two decades has provided a viable alternative to concrete and steel construction.


Devised less than twenty five years ago, CLT is a modern timber product, which utilizes a range of species and grades for high performance applications. Cross-laminating is a way of optimizing varying grade softwood to create boards with a high and predictable strength.

CLT panels consist of layers of structural lumber boards stacked in perpendicular layers and glued together under high pressure. A cross-section of a CLT panel is typically fabricated with three to nine layers of boards. By alternating the orientation of the layers of wood, expansion and shrinkage in the plane of the panel is minimized. The result is a considerable increase in stability and structural capacity.

The engineered composite formed through the lamination enables taller, stronger, more stable and safer timber structures that are able to comply with the more onerous demands of high-density building. In this way the multiple issues that have prevented timber frame from entering urban typologies can be overcome.

Broadly speaking, using CLT allows us to construct lighter, better quality buildings, more quickly, with reduced foundations and fewer deliveries to site. This method of construction leads to safer, cleaner, quieter sites, with a reduced number of workers and consequently less nuisance to neighbors in a dense urban site.

The material itself contributes to thermal and acoustic insulation and has verifiable health and well-being benefits. The timber structure locks carbon within its fabric, an intrinsically sustainable and modern approach to construction that produces high quality, high performance buildings.

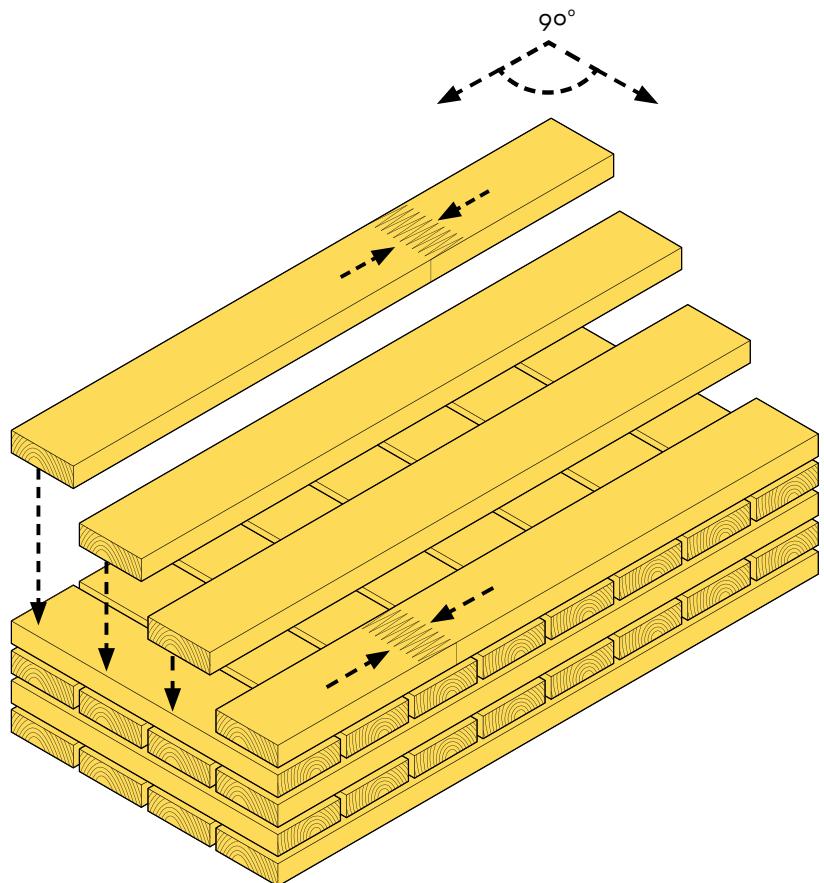

## HISTORY

CLT has its origins in the traditional timber technologies of central Europe and Scandinavia. Modern CLT resulted from joint research between industry and academia in Austria in the mid 1990s and its development has been supported by ongoing research.

In the early years, a few small timber manufacturers in the sub-Alpine regions of Germany, Austria and Switzerland experimented with the new composite and it was used in the construction of buildings up to three storeys.

In the early 2000s, manufacturing and construction techniques had matured enough for full-scale production to begin. The use of CLT spread across Europe and developed particularly in the UK.<sup>5</sup>

As the reputation of the technology has spread, other European countries have begun to set up their own manufacturing facilities.

## M A N U F A C T U R E


CLT is made from boards of timber, approximately 1-2 inches (20-40mm) thick, which are sorted, finger jointed together into long strips and arranged side by side to form layers. These are glued and pressed to form panels of multiple layers (minimum of 3). Each layer is at 90 degrees to the one before, forming the cross-lamination.

Lumber boards are kiln dried to a moisture content of 10-14%<sup>6</sup> which assists with adhesion and reduces dimensional variations and surface cracking. Defects that influence the strength of the boards, such as large knots, are removed and the boards are trimmed and finger jointed to obtain the desired lengths and quality of lumber.

The panels are assembled by placing the boards side-by-side to form solid wood layers. Each successive layer is laid perpendicular to the preceding layer with adhesive being applied between layers. Once assembled the board is then pressed, in either a large hydraulic or vacuum press, and finally cut to size and/or milled to specification.

In Europe, two glues are typically used in CLT production: PUR, polyurethane based adhesives, or, less commonly MUF, Melamine-Urea-Formaldehyde based. PURs are preferred as they are solvent and formaldehyde free ensuring low toxicity and aiding future re-use or recycling, however the adhesive selection can be influenced by fire requirements.<sup>7</sup>

A test of five different CLT panels indicated no impact on internal air quality by the emission of volatile organic compounds (VOCs) from the CLT.<sup>8</sup>

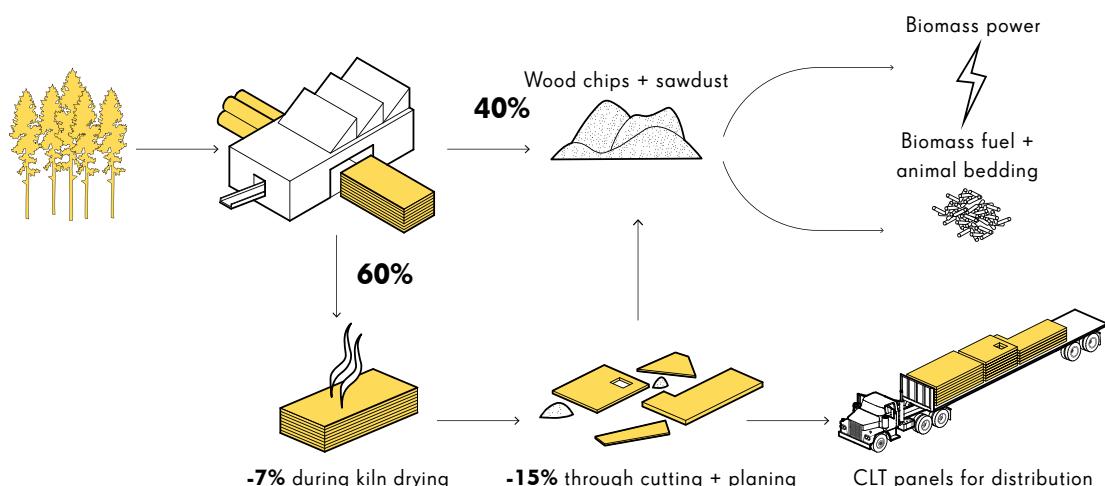

The production of CLT is a closed loop process in which most waste is reused. The diagram shows the principal activities and efficiency.

CLT is produced at a variety of qualities to meet the requirements of various applications. Generally, this range is non-visible quality (NVQ), industrial visible quality (IVQ), and visible quality (VQ), decreasing in visual imperfections and increasing in appearance quality respectively.


The various manufacturers produce panels of different dimensions, the size of which is impacted by the constraints posed by transportation. While larger panels can be manufactured, their delivery can require special measures such as notification of authorities, road lane closures and police escorts, adding complexity and cost.

## THE TIMBER

The timber species that are typically used for CLT are coniferous, evergreen softwoods predominantly Spruce, with varying quantities of Douglas Fir, Western Larch and Pine.<sup>9</sup>

A typical tree harvested for CLT will be around 80 years old and 100ft tall.<sup>10</sup> Sawmilling has a yield rate of around 60% by volume. The kiln drying, planing and cutting causes a further 25% loss. As a result, from every 100ft<sup>3</sup> of log around 45ft<sup>3</sup> of CLT can be produced (0.43m<sup>3</sup> CLT from 1m<sup>3</sup> log).<sup>11</sup>

In most CLT plants the lost material is not wasted - all of the offcuts and sawdust are processed into co-product and biomass that is used to run the factory equipment, the kiln and provide fuel for local communities.<sup>12</sup> This is an optimized process that allows most production to be self-sufficient in terms of energy use.

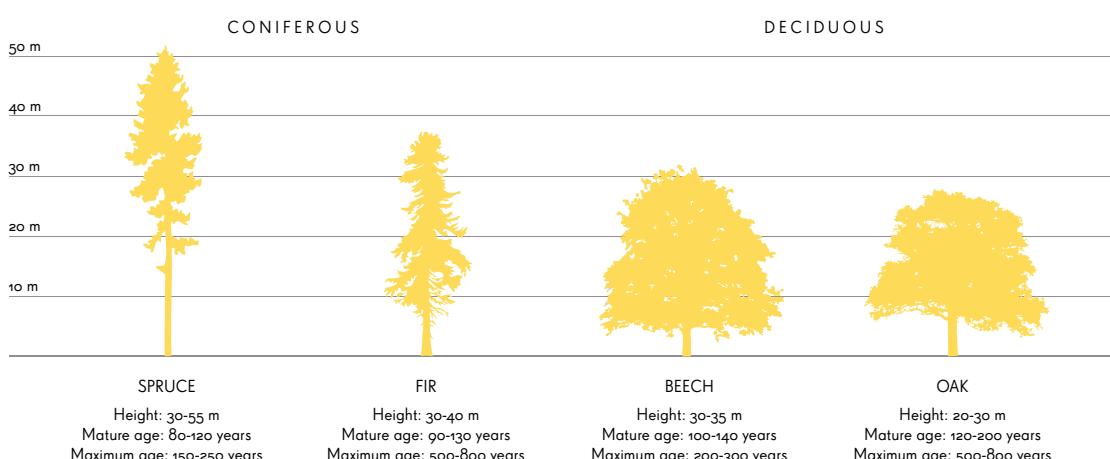

Comparing the fast growing softwoods used in CLT manufacture with typical hardwoods.

## FORESTRY

The Forest Stewardship Council (FSC) and Program for the Endorsement of Forest Certification (PEFC) are certification bodies for the forestry industry. In addition to country regulations, third-party certification confirms that forests are managed in a responsible and sustainable way ensuring diversity, supply and good conditions for workers. Across the world over 1 billion acres of forest is certified, with 16% of this having both PEFC and FSC certification.<sup>13</sup>

This certification is only awarded to products when chain of custody certificates demonstrate that all companies that have handled and processed the timber are accredited. In this way a fully sustainable industry is maintained.

Most CLT manufactured in Europe is produced from timber grown and harvested in Austria and Germany. Both are heavily forested at 48%<sup>14</sup> and 32%<sup>15</sup> respectively, with established forestry industries.

Despite felling, forest coverage in Austria and Germany is increasing year on year.<sup>16</sup> The managed forests from which the timber for CLT is sourced are contributing to an increase in forest coverage. Controlled harvesting from these forests must be distinguished from global concerns of deforestation.

Timber is the only mainstream construction material that can be considered as truly replenishable due to the speed at which it grows. PEFC and FSC are the most established regulatory and certification bodies for a construction material's sourcing ensuring the production of timber is fully sustainable.

In Austrian and German forests alone, enough timber is grown within one hour to produce the CLT required for Dalston Works (pg. 228-229), currently the largest timber building in the world. On this measure, an average dwelling of 1,000ft<sup>3</sup> (30m<sup>3</sup>) would be grown every 20 seconds with the 2,440,000 ft<sup>3</sup> (70,000m<sup>3</sup>) of CLT used for the 100 case studies growing in 14 hours.<sup>17</sup>



## **CLT BUILDINGS IN THE UK**

The UK has one of the most diverse range of CLT buildings in the world. The reasons behind this are multiple and varied, however one key driver is the nature of the legislative structure that governs construction in the UK.


The construction regulations of most countries define specific parameters to which the design must adhere. These regulations will tend to dictate the maximum height for buildings constructed from a combustible material, such as timber. Typically, a maximum number of storeys is prescribed for a fully exposed, partially exposed and fully encapsulated structure. In such environments, the limits can only be increased by a change in the law.


In contrast, the UK building regulations are descriptive rather than prescriptive. They indicate a series of performance requirements and it is the responsibility of the design team and consultants to demonstrate that the proposed solution meets these criteria.


CLT buildings in the UK have to meet the same performance criteria as other building methods and the uptake has not been a completely smooth and effortless journey. This modern method of construction has been advocated and pioneered by architects and engineers across the UK who have gradually overcome the various barriers that have stood in the way.

The extensive portfolio of CLT buildings in the UK demonstrates how engineered timber has and can be used across a range of sectors. Each of the 100 schemes detailed demonstrates an application of CLT and sets a precedent to further the use of CLT in the UK and the rest of the world.

The map of the United Kingdom shows the locations of the 100 case study projects.

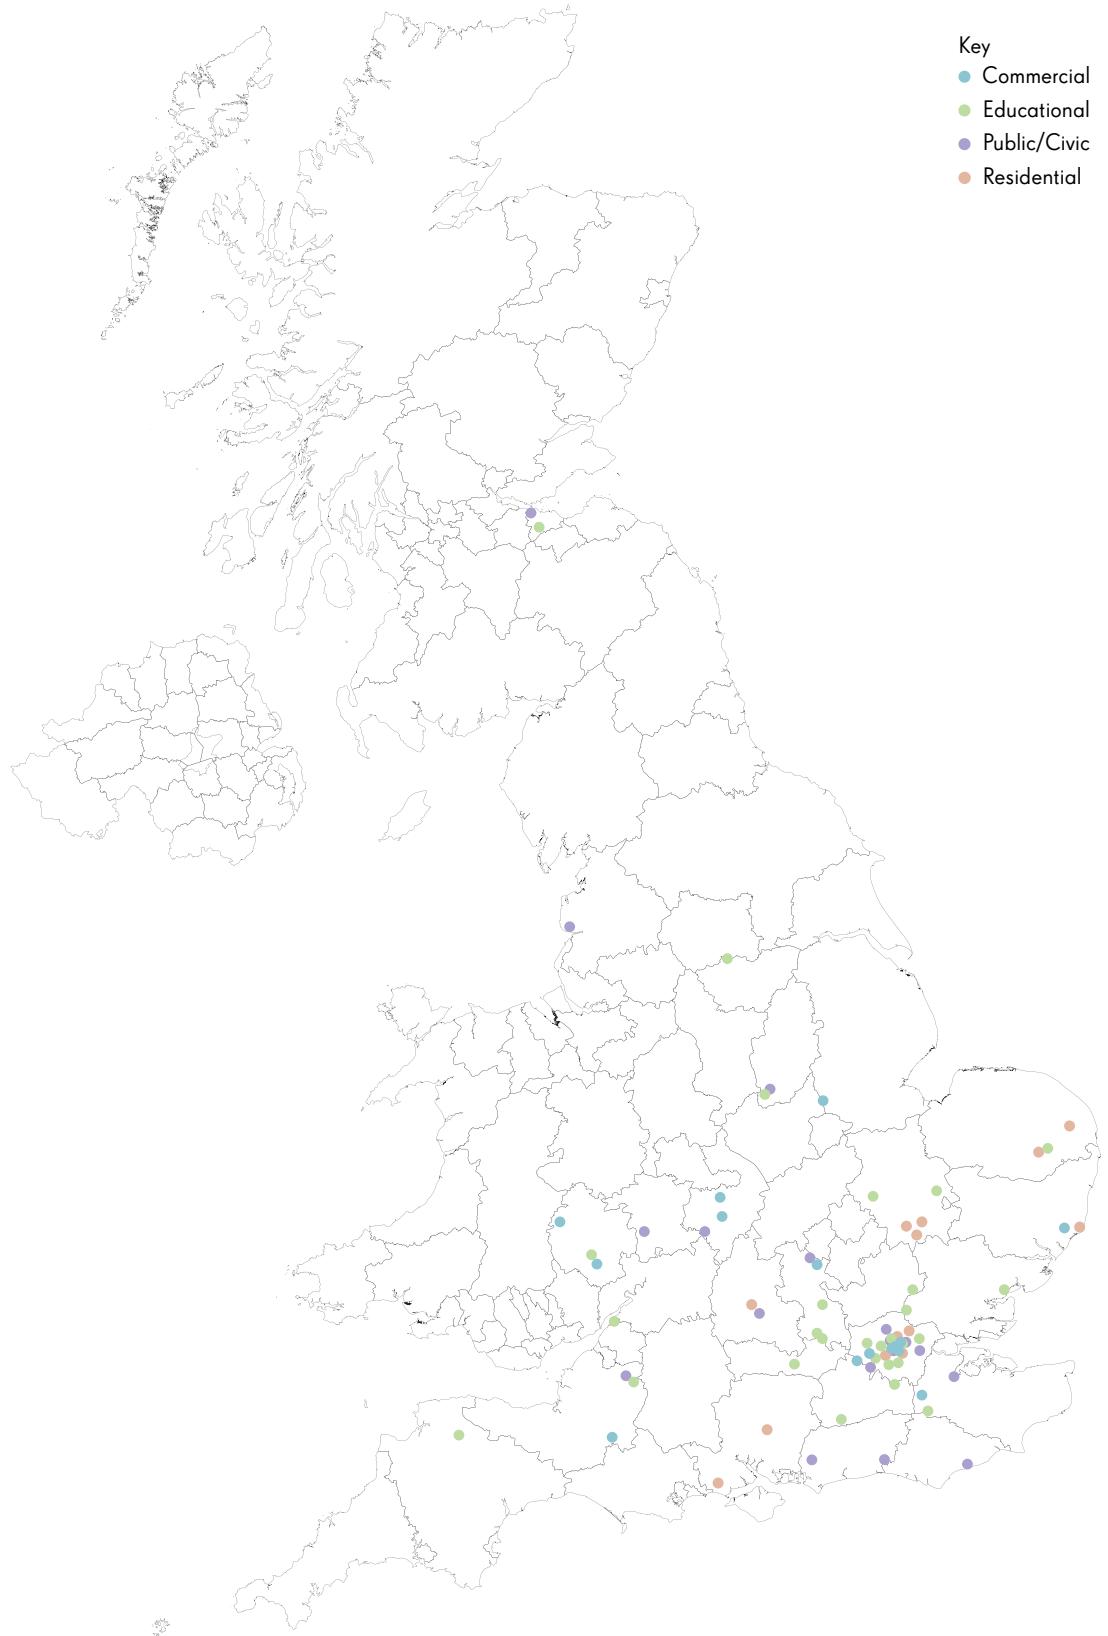

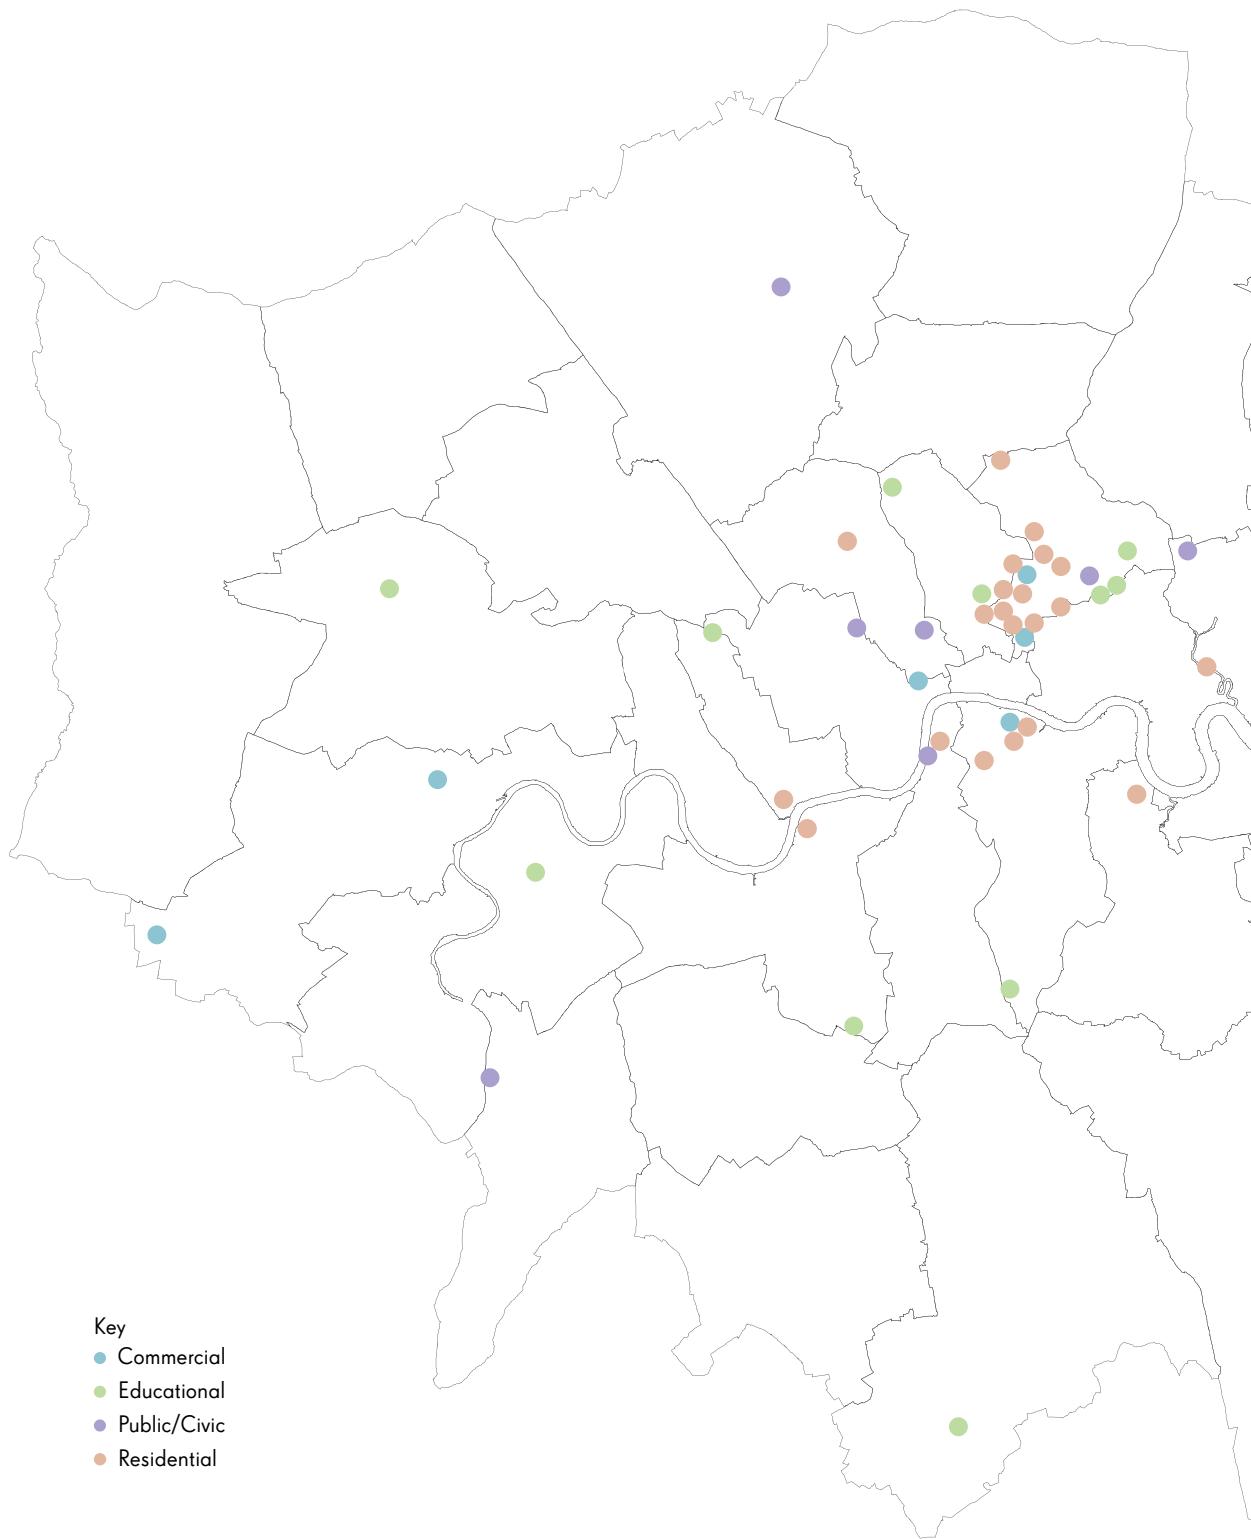

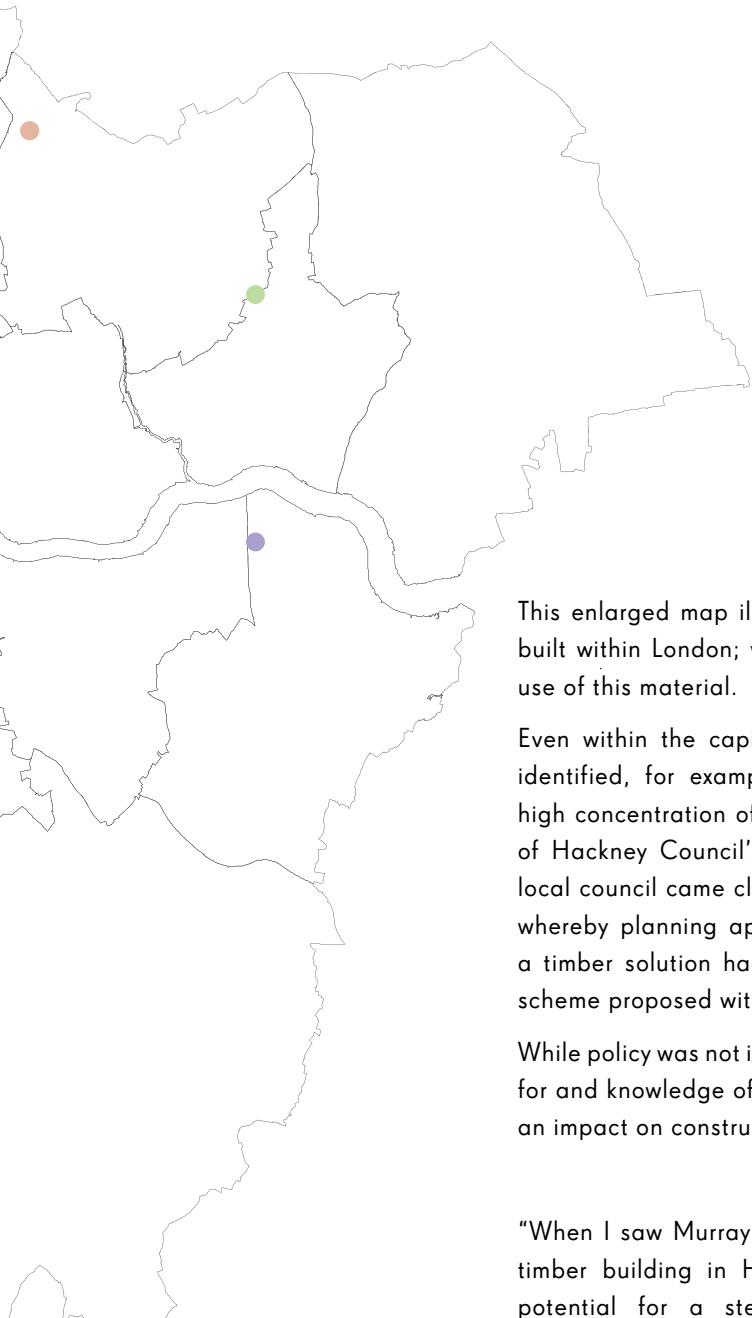

This enlarged map illustrates the spread of the 48 case studies built within London; which has become a key focal point for the use of this material.

Even within the capital, hot spots of CLT construction can be identified, for example the London Borough of Hackney. This high concentration of engineered timber buildings is a reflection of Hackney Council's commitment to sustainability. In 2012 the local council came close to implementing a 'Timber First' policy,<sup>18</sup> whereby planning applications would have to demonstrate that a timber solution had been investigated as an option for each scheme proposed within the Borough.

While policy was not implemented it is evident that to a preference for and knowledge of timber within the local government has had an impact on construction within the Borough.

"When I saw Murray Grove, the world's first 9 storey residential timber building in Hackney, it was clear that there was real potential for a step-change in sustainable construction. I am delighted and proud that Hackney has played a part in the story of tall timber buildings. I hope this will encourage others to embrace engineered timber in construction."

Councillor Vincent Stops, Hackney Council.

## Endnotes

<sup>1</sup> United Nations, *World Urbanization Prospects, The 2014 Revision, Highlights* (New York, United Nations, 2014).

<sup>2</sup> PBL Netherlands Environmental Assessment Agency and European Commission Joint Research Centre, *Trends in Global CO<sub>2</sub> Emissions, 2016 Report* (The Hague, PBL Publishers, 2016), p.64.

<sup>3</sup> National Society of Professional Engineers, *Construction Productivity in Decline*, 2014. <[http://www.leanconstruction.org/media/docs/PEJune14\\_Construction.pdf](http://www.leanconstruction.org/media/docs/PEJune14_Construction.pdf)> [accessed 20 September 2017].

<sup>4</sup> Cardiff Garcia, 'The remarkable productivity stagnation of the US construction sector', *Financial Times*, 2014 <<https://ftalphaville.ft.com/2014/04/15/1821522/the-remarkable-productivity-stagnation-of-the-us-construction-sector/>> [accessed 20 September 2017].

<sup>5</sup> Mike Berners-Lee, 'What's the carbon footprint of... building a house', *The Guardian*, 2010 <<https://www.theguardian.com/environment/green-living-blog/2010/oct/14/carbon-footprint-house>> [accessed 8 September 2017]. Embodied carbon figures from a cross section of CLT case study projects.

<sup>6</sup> FP Innovations and Binational Softwood Lumber Council, *CLT handbook: cross-laminated timber/edited by Erol Karacabeyli, Brad Douglas, U.S. ed.* (U.S. Department of Agriculture, Forest Service, Forest Products Laboratory, Binational Softwood Lumber Council, 2013).

<sup>7</sup> Questionnaire from Kay Hartmann, KLH UK, 11 September 2017.

<sup>8</sup> Questionnaire from Daniel Kreissig, Zublin Timber, 22 September 2017.

<sup>9</sup> FP Innovations and Binational Softwood Lumber Council, *CLT handbook: cross-laminated timber/edited by Erol Karacabeyli, Brad Douglas, U.S. ed.* (U.S. Department of Agriculture, Forest Service, Forest Products Laboratory, Binational Softwood Lumber Council, 2013).

<sup>10</sup> Questionnaire from Kay Hartmann, KLH UK, 11 September 2017.

<sup>11</sup> proHolz Austria, Wald in der EU, *Zuschnitt*, No. 51 (2013), pp.15-16.

<sup>12</sup> Email from Christof Richter, Research and Design at Binderholz, 05 April 2017.

<sup>13</sup> KLH UK, *Frequently Asked Questions*, 2017 <[http://www.klhuk.com/media/11553/frequently%20asked%20questions\\_05042011\\_1.pdf](http://www.klhuk.com/media/11553/frequently%20asked%20questions_05042011_1.pdf)> [accessed 10 July 2017].

<sup>14</sup> PEFC, *Facts & Figures*, 2017 <<https://www.pefc.org/about-pefc/who-we-are/facts-a-figures>> [accessed 20 September 2017].

- 14 Republic of Austria, Federal Ministry of Agriculture, Forestry, Environment and Water Management (BMLFUW), *Sustainable forest management in Austria, Austrian Forest Report, 2015* <<https://www.bmlfuw.gv.at/english/forestry/The-Austrian-Forest-Report-2015--Austria-s-forests-receive-top-grades.html>> [accessed 19 September 2017].
- 15 Federal Ministry of Food and Agriculture (BMEL), *The Forests in Germany, Selected results of the Third National Forest Inventory, 2014* (Translation 2015) <<https://www.bmel.de/SharedDocs/Downloads/EN/Publications/ForestsInGermany-BWI.html>> [accessed 19 September 2017].
- 16 BMLFUW, *Austrian Forest Report, 2015*. BMEL, *The Forests in Germany, 2014*.
- 17 BMLFUW, *Austrian Forest Report, 2015*. BMEL, *The Forests in Germany, 2014*.
- 18 Will Hurst, *Hackney moots 'timber-first' planning policy*, Building online, 17 May 2012 <<http://www.building.co.uk/hackney-moots-'timber-first'-planning-policy/5036737.article>> [accessed 20 August 2017].



# BENEFITS

As humanity reassesses its relationship with the planet from one of exploitation to one of investing and protecting our natural assets, so we transition from using materials that are extracted from the ground and pollute the atmosphere, to prioritizing the use of that which is naturally grown. This process will start to reverse the damage to the environment caused by mass global industrialization over the last two centuries.

Trees provide us with an abundant, replenishable source of material. When used in buildings, timber offers unsurpassed benefits to the health and wellbeing of those involved in the construction, those living nearby and those that live or work inside the completed building.

In terms of the planet, one of the greatest attributes of timber is that it absorbs carbon during growth. By using more timber in the construction of our buildings we can remove increased amounts of carbon from the atmosphere. By producing buildings that act as carbon stores, we can make a significant contribution to carbon reduction and help to mitigate the impact of climate change.

## LIFE-CYCLE ANALYSIS


Carbon exists throughout the planet as reservoirs - forests, oceans and open land have significant potential for both storing and emitting carbon. The constant movement of carbon between these various states is known as the carbon cycle. Balanced levels of carbon in the atmosphere are maintained through absorption and emission on the surface of the planet.

The recent increased combustion of fossil fuels that had stored carbon for millennia has disrupted the carbon cycle, increasing the concentration of carbon in the atmosphere and creating change in our climate. Given the time scale over which these stores were created, the released carbon will not be re-absorbed at a fast enough pace to reverse the damage already caused and to stop severe climate change.

Comparatively the carbon cycle within a forest is dramatically shorter with carbon storage within trees taking decades as opposed to millennia. As trees grow they absorb carbon dioxide from the atmosphere for photosynthesis, they then release the oxygen and store the carbon within the wood. As a tree approaches full size the rate of this carbon sequestration plateaus. Eventually the tree will die and decay slowly releasing the carbon back into the atmosphere, a natural part of the lifecycle of a forest.

In managed forests the trees are felled before the end of this lifecycle. The carbon remains within the harvested timber. For each tree that is felled others are planted in its place. Additional planting year on year ensures a net increase in the carbon stored within managed forests despite harvesting.

All timber products, including CLT buildings, act as carbon stores. Effectively, when we build in timber from sustainably managed forests we are increasing the capacity of the world's carbon sink. The scale of today's construction industry offers the opportunity to create a new carbon reservoir within the fabric of timber buildings.

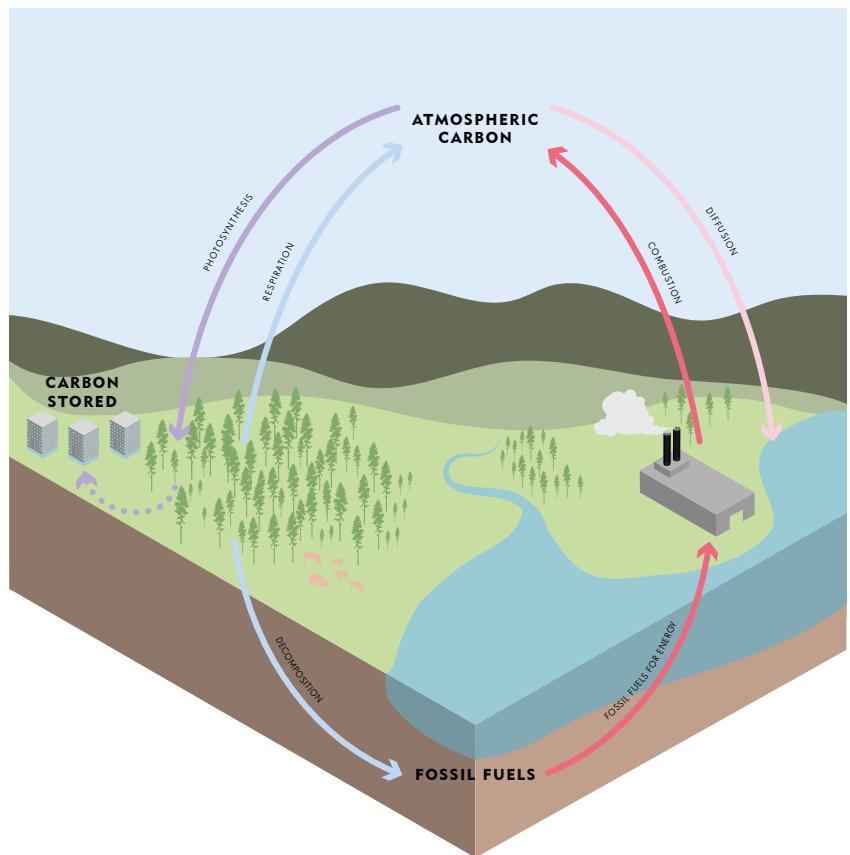


The Carbon Cycle - it is estimated that there is about 30% more carbon dioxide in the atmosphere today than there was 150 years ago. Ice cores show that there is now more carbon dioxide in the atmosphere than there has been in the last 420,000 years.

## CIRCULARITY – END OF LIFE SCENARIOS

As part of the overall impact of a building, the whole life carbon cost should be considered, especially where the stored carbon is a factor. We must consider that in the next 50 years some of the early CLT buildings will be decommissioned and, while the timber can be used for fuel, it would be preferable for the carbon storage to be extended through reuse or recycling.

As a new technology there are few precedents set for end of life recycling or reuse. However, at this early stage in CLT's development we have the opportunity to plan for this now. We can design with the objective of maintaining the CLT as a carbon sink when a building is decommissioned; designing for reuse and recycling, rather than energy production.

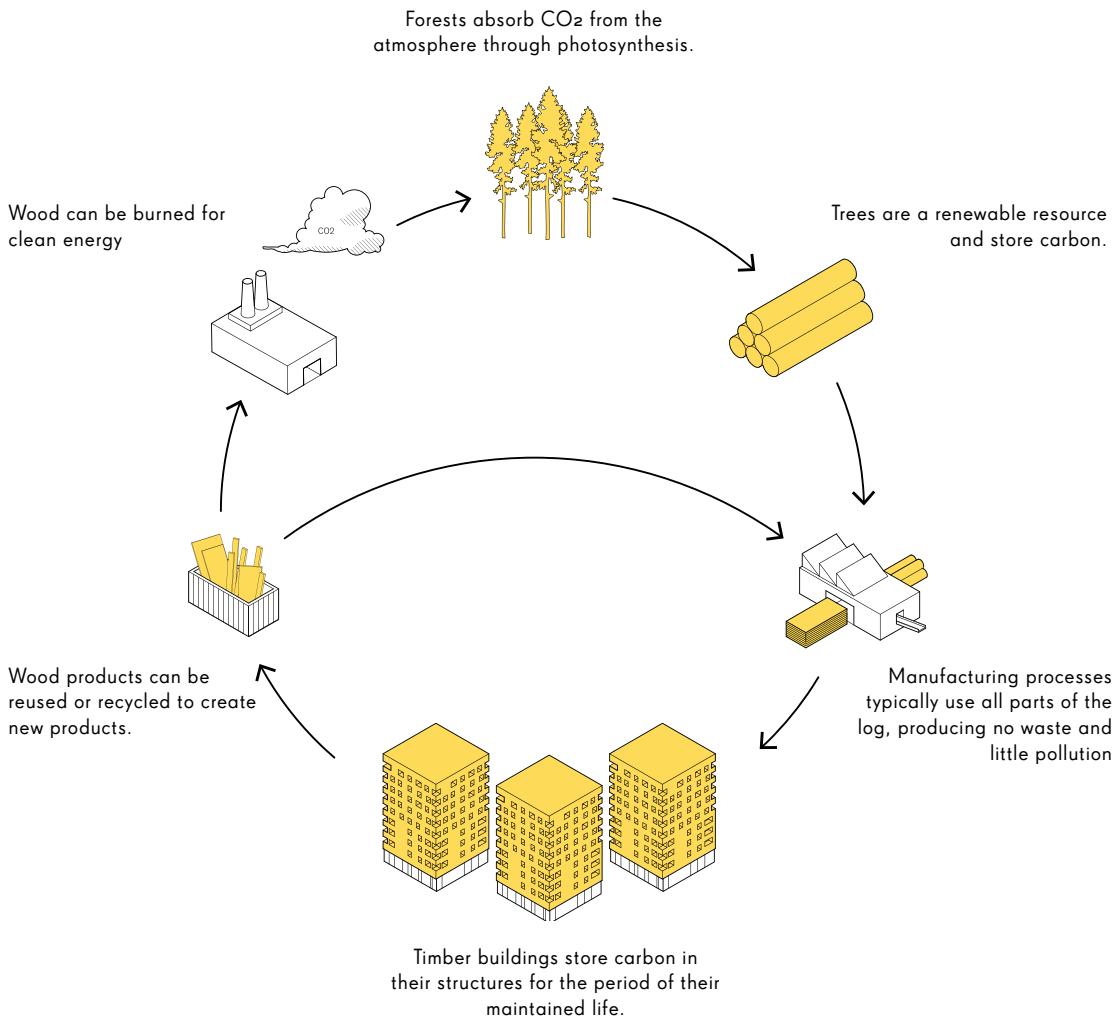

Contaminants are the most significant obstacle to wood recycling. Research by The Waste and Resources Action Program (WRAP) outlines the cost and time implications of removing contaminants, and highlights that preventing contamination in the first place is the best and easiest method to ensure that wood can be recycled and reused.<sup>1</sup>

The glues typically selected for CLT manufacture are low hazard, meaning that the panels that leave the factory can be recycled or reused. By keeping re-use in mind during the design stage, designers can ensure that the CLT is not treated with toxic products, which would inhibit recycling.

An example of how this is achieved is the Sky Health and Fitness Centre (pg.250-251). Structural and fire engineering design allowed the CLT to be exposed whilst avoiding the need for almost all applied spread of flame treatment. Considering the reuse at the early stage of design has ensured that the panels used within this scheme have a greater potential for recycling at the end of the building's life.<sup>2</sup>

The cascade principle is based on the idea that the value of a product, both in terms of its material and capital should be maintained for as long as possible to maximize a material's useful life. In essence a CLT panel is a high quality and valuable product that can be repeatedly processed into lower quality products with use as biofuel being the last and final option. The benefit here is that each new life the material is given extends the period for which it remains a carbon store.



Sky Health and Fitness Centre, dRMM © Paul Carstairs/ARUP


# REDUCING CARBON INTENSIVE MATERIALS

## FRAME SUBSTITUTION

The processing, manufacture and transportation of modern timber products result in a significantly lower embodied carbon figure than other, traditional construction materials.

It is not straightforward to directly compare the embodied carbon of one ft<sup>3</sup> or a pound of a specific material as the volume or weight of material used for the same building will vary depending on the structural system and performance. Research studies have compared the embodied carbon of concrete, steel and hybrid structural frames, all generally illustrating a similar level of embodied carbon, at around 55lbs.CO<sub>2</sub>/ft<sup>2</sup> (225kgCO<sub>2</sub>/m<sup>2</sup>) for the superstructure of an open plan commercial type building.<sup>3</sup> This embodied carbon figure is for 'cradle to site' incorporating extraction, processing and delivery.

Comparatively based on the open plan pure timber commercial buildings in our study, the equivalent embodied carbon of the timber structure, not including the sequestered carbon, is 12lbs.CO<sub>2</sub>/ft<sup>2</sup> (63kgCO<sub>2</sub>/m<sup>2</sup>). By substituting a CLT frame for a concrete or steel structure the embodied carbon of the building can be vastly reduced.

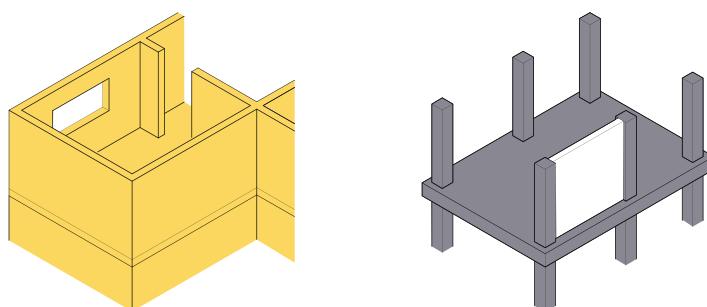


The diagrams illustrate that a CLT frame includes internal walls, as well as structure, compared to a reinforced concrete frame, which requires infill.

## **REDUCED FOUNDATIONS**

The design of any engineered timber building must ensure that the timber is protected to avoid contact with moisture that could cause mold growth or decay. In most instances, concrete or other masonry materials are used for the foundations of timber buildings.

While timber should rarely be used for below ground works, the weight of a CLT structure can significantly reduce the requirement for foundations, resulting in an overall reduction in the volume of concrete used for the ground works as compared to a traditional build.<sup>4</sup>

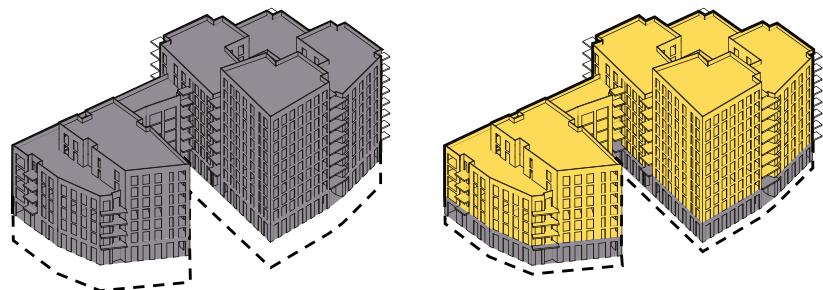

The diagram indicates an approximate reduction in the raft foundations required for a CLT version of the Dalston Works scheme.

## **REDUCED SECONDARY STRUCTURE AND FINISHES**

In contrast to most frame technologies, CLT panels can be utilized to form entire walls, floors and roofs which reduces, and in some cases removes, the need for any secondary structure. In addition, when exposed as an internal finish, the use of CLT reduces the volume of finishing materials required to line walls and form suspended ceilings.


Reducing the volume of high-embodied carbon secondary materials, such as dry wall or aluminium cladding, can significantly further reduce the carbon footprint of the building.

## STRENGTH AND RESILIENCE

Cross-laminated timber and glulam offer high strength to weight ratios that in many cases equal those of steel and reinforced concrete.<sup>5</sup>

CLT panels provide high levels of strength throughout the structure. This strength is demonstrated both in-plane, resisting shear forces and carrying load and out-of plane, where a panel acts as a bending slab. This two-way load resistance is similar to the behavior of reinforced concrete.<sup>6</sup>

Additionally, the cross lamination ensures high levels of dimensional stability with little deformation of the panels to in-plane load. Out-of-plane load, and in particular localized compressive load, for example in a floor slab at the base of a wall panel, is more likely to result in deformation, however this is able to be calculated precisely and accounted for within the dimensioning of an overall structural frame.

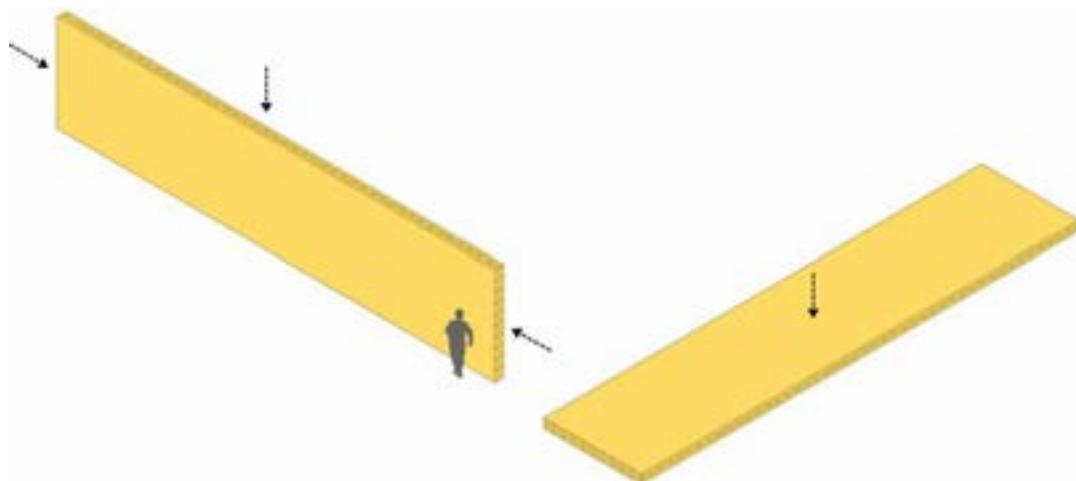

CLT can resist load both as a beam (ie. in-plane), or a slab (out-of-plane)

Where the compressive load is likely to be high, for example at the lower levels of a multi storey building, slab panels can be reinforced by using localized grout pockets or by driving screws or hardwood dowel into the timber as reinforcement.

Innovative engineered timber panels are currently under development which include hardwood and carbon fiber layers within the panel leading to substantial increases in strength.

## FIRE

A key advantage of CLT is its inherent fire resistance. In most cases, the charring of the timber surface during a fire protects the material beneath which maintains its structural integrity. In this way, significant structural fire protection can be achieved within the material items and CLT panels can be produced with fire resistances of up to 60 minutes.

In practice, a combination of the timber charring and fire resistant boards are commonly used to achieve the necessary fire rating.

Great care should be taken with regard to the resistance to fire and the potential for escape from all buildings, whatever their construction material. The fact that timber is a combustible material encourages the designer of timber buildings to pay particular attention to these issues, although this should be the case for all buildings.

## SEISMIC ACTIVITY AND EXPLOSIONS

Under exceptional loads, such as from earthquakes, CLT and its connections flex and absorb energy from the vibrations, acting as a damper. This is in contrast to concrete and steel, which are more likely to fracture or disintegrate under these forces.<sup>7</sup>

The most robust study to date to quantify the seismic behavior of CLT construction is the SOFIE project undertaken by the Trees and Timber Institute of Italy. A seven storey structure was shown to be able to withstand significant sustained vibration, up to the strength of the Kobe earthquake of 1995 without any significant damage.<sup>8</sup>

Last year the U.S. Department of Defense subjected CLT and other materials to a series of live blast tests which showed in slow motion the way in which the timber bows and absorbs much of the energy of the blast, resulting in little permanent damage.<sup>9</sup>


# BENEFITS IN CONSTRUCTION

## SPEED

The program savings that can be achieved using CLT are generally considered the most significant benefit and biggest cost saving associated with this system of construction. Typically, the overall construction of a CLT scheme will be 20% faster than an equivalent scheme in reinforced concrete.

This time saving is not only the result of the speed at which the pre-fabricated elements of CLT are erected, but of the significant time savings in the later stages of construction. These gains are principally achieved through the accuracy of the finished structure, the structural stability, concurrent working and the ease of fastening into timber.

Both installation of the prefabricated CLT panels and subsequent works are easier, quieter and safer, reducing or completely avoiding wet trades and reducing the number of personnel required to erect the superstructure by around 50-70%.<sup>10</sup>

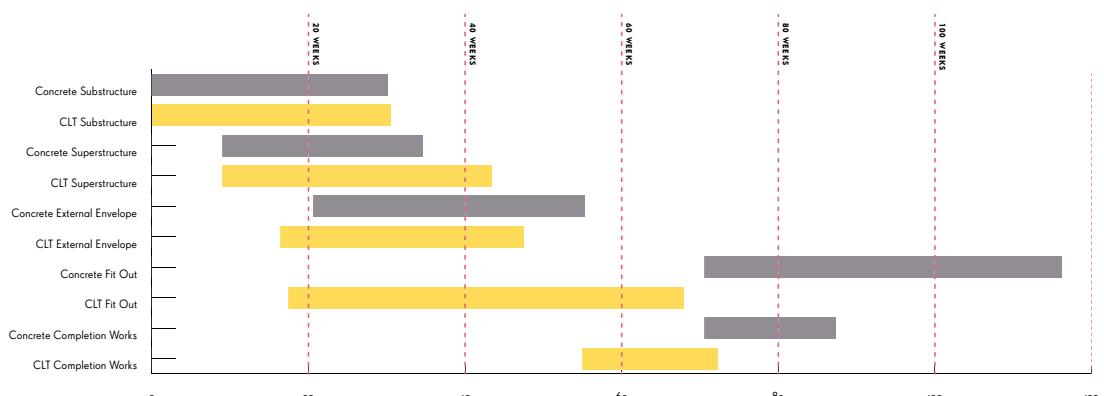

The Gantt chart indicates the approximate program adjustments that would be expected for a CLT scheme compared with a traditional reinforced concrete build.


KLH UK lists the following approximate time savings for various aspects of the build:<sup>11</sup>

- Services (MEP) – approx. 30-50% faster
- Dry liners – approx. 20-30% faster
- Window & door installers – approx. 20-30% faster
- Insulation installers – approx. 20-30% faster
- Cladding installers – approx. 20-30% faster


Reduction in program time has financial benefits in reducing on-site overheads, shortening loan terms, personnel costs and allowing for the earlier occupation of buildings.

The reduced program offered by CLT can also enable time critical projects to be realized. This can be a crucial consideration for many projects, including schools, for which funding periods can be set and term time dates and new intake levels fixed.

81% of the education case studies stated that time savings were one of the primary factors in the choice of CLT for their project.



Education projects that highlighted speed as a primary benefit



Projects across all the sectors that highlighted speed as a primary benefit

## **WASTE AND LOGISTICS**

A typical CLT structural frame is prefabricated off-site and includes openings and service voids. As a result of this there is almost no waste from the erection process of the structure. This can have benefits in terms of the site operations in that there is no need to take up large areas for site waste storage prior to disposal.

Savings in site logistics are also achieved from the ability to crane panels directly and quickly into place from a delivery vehicle. Frequently the erection of the frame can be undertaken using a mobile crane eliminating the requirement for a tower crane, with the expense and additional structure they require.



Waste from one week during the erection of the CLT frame at Stadhaus/Murray Grove

## **HEALTH AND SAFETY ON SITE**

With the reduction in material and weight, there is a reduction in the labor required to construct a pre-fabricated CLT frame, and the health and safety considerations on site can therefore be commensurately reduced. Furthermore, the completion of entire solid walls concurrently with floors reduces the risk of falls from height and gives a dry and warmer working environment. Where stairs are also included in the frame, each completed level offers a safely accessible workspace with limited need for additional protection.

The construction of CLT buildings is quieter and creates less dust and waste than traditional construction sites. This makes for better working conditions for construction workers and a cleaner local environment, an important issue particularly in urban locations.

In comparison to a concrete or steel construction site, the noise levels from CLT construction are dramatically lower. Because the panels are pre-fabricated to minute tolerances there is no heavy machinery required on site. The majority of work involved in fixing into the timber is achieved with cordless power tools. This makes for both a significantly quieter and less toxic working environment.

Furthermore, the timber itself absorbs airborne vibrations significantly reducing reverberant noise levels both on and off site. The inclusion of external walls within the superstructure means that the majority of the working space is partially enclosed which further limits sound nuisance to neighboring properties.

Deliveries of the structure are also greatly reduced, often by as much as 80%.<sup>12</sup> The effect of construction site deliveries on the urban environment in the UK is becoming an increasingly widely discussed issue. Pollution from engine fumes and tires has been demonstrated to have a major impact on air quality in the urban areas of the UK.<sup>13</sup>

## HEALTH AND WELLBEING

In 2015, Planet Ark, an Australian not-for-profit, environmental organisation, published a review of studies analysing the health and wellbeing benefits of wooden interiors in homes, businesses, schools and hospitals.

"We know that workers are less stressed and more productive, students learn better, patients heal faster, and people are generally happier and calmer in indoor areas which contain wooden elements," says David Rowlinson.<sup>14</sup>

The review identified that the increased use of wood has measurable physiological and psychological health benefits. Exposing timber in interiors has a number of measurable health benefits for inhabitants including reduced blood pressure, heart rate and stress levels. Studies also show that living or working in a wooden interior can improve a person's emotional state and their level of self-expression.<sup>15</sup>

In schools, this can include greater levels of attention and receptiveness to learning. At the Ickburgh School (p.136-137), the head noted that the wood had a beneficial impact on the stress levels and behavior of the children.

The review identified studies that show that the presence of wood in offices can dramatically improve visitor's impression of the company, conveying feelings of innovation, energy and comfort. Companies with timber interiors report higher levels of staff retention, greater levels of productivity and lower levels of sickness.

In addition to the psychological and physiological effects of timber, the use of wood has a beneficial effect on air quality through moderating levels of humidity, absorbing moisture in humid conditions and releasing moisture in dry conditions. This also reduces discomfort from high humidity that often accompanies high temperatures.

Another feature of wood is that it does not become electrically charged, which inhibits the raising of dust, reducing allergens and increasing the quality of life for those suffering with respiratory problems.<sup>16</sup>

Timber surfaces and massive timber panels have an acoustic benefit, absorbing sound and so improving comfort, particularly in more public environments.

## DESIGN FLEXIBILITY AND AESTHETICS

A structural system that is entirely timber offers opportunity for new forms of architectural expression. This provides us with an extensive range of innovative and distinctive buildings, many examples of which are included in the case studies in this book.

These illustrate the simple composite action that CLT construction enables, where walls and balustrades can act as beams above slabs and cantilevers can be achieved with the straightforward extension of a slab. Multiple load paths allow engineers to create efficient, well-honed structures, leading to a range of structural possibilities.

At the mixed-use building on Whitmore Road (pg.192-193) the party walls between the apartments at the top of the building act as deep beams holding the roof of the open plan photographic studio beneath. Similarly, the complex folded roof of the house extension at Hunsett Mill (pg.180-181) is designed to be stiff enough to support the first floor which is hung beneath.

The high strength to weight ratio and the low thermal conductivity make cantilevers straightforward to form. Examples within the case studies include the roof of the Queen Elizabeth Olympic Park Timber Lodge (pg.294-295) and the Wedding Chapel in the Tower of Love pavilion (pg.282-283).

The natural beauty of the raw material provides an attractive internal finish with the added expedient of not having to line out the structure. Many of the case studies demonstrate how this advantage has been exploited.

The monolithic Architecture Archive (pg.244-245) exposes almost the entire structure both internally and externally. Similarly, Barrett's Grove (pg. 206-207), a development of six homes, exposes all internal walls and ceilings.

## Endnotes

1 Ijeh, I., Recycling Timber: Wasting away, Building online, 28 October 2015 <<http://www.building.co.uk/recycling-timber-wasting-away/5078393.article>> [accessed 20 August 2017].

2 Adrian Campbell, Change Building, interview by R.Sawcer & K.Walker, London, 14 August 2017, Waugh Thistleton Offices.

3 Cundall Johnston & Partners LLP, Embodied carbon of steel vs concrete buildings, Information paper – 31, 2013 <<http://www.cundall.com/Cundall/fckeditor/editor/images/UserFilesUpload/file/WCIYB/IP-31%20-%20Embodied%20carbon%20versus%20steel%20v%20concrete%20buildings.pdf>> [accessed 15 June 2017].

4 Gavin White, Ramboll, Interview by A.Thistleton & R.Sawcer, London, 8 September 2017, Waugh Thistleton Offices.

5 Structural Timber Association, Timber as a structural material - an introduction, Structural Timber Engineering Bulletin 1, 2014 <[http://www.cti-timber.org/sites/default/files/STA\\_Timber\\_as\\_structural\\_material.pdf](http://www.cti-timber.org/sites/default/files/STA_Timber_as_structural_material.pdf)> [accessed 10 July 2017].

6 Gavin White, Ramboll, Interview by A.Thistleton & R.Sawcer, London, 8 September 2017, Waugh Thistleton Offices.

7 Gavin White, Ramboll, Interview by A.Thistleton & R.Sawcer, London, 8 September 2017, Waugh Thistleton Offices.

8 National Research Council of Italy, Trees and Timber Institute, *The SOFIE project*, 2007 <<http://www.ivalsa.cnr.it/en/current-projects/edilizia-e-architettura/progetto-sofie.html>> [accessed 10 August 2017].

9 Joyce El Kouarti, U.S. Forest Service Office of Communication in Forestry, *Build Better, Stronger, Faster with CLT*, 2017 <<https://www.usda.gov/media/blog/2017/04/04/build-better-stronger-faster-clt>> [accessed 10 September 2017].

WoodWorks, Wood Products Council, Woodworks Leads Blast Testing Project for Cross-Laminated Timber, 2016 <<http://www.woodworks.org/wp-content/uploads/Blast-Testing-News-Update-Dec-12-2016.pdf>> [accessed 10 September 2017].

WoodWorks, Video recordings, 2016 <<https://www.youtube.com/channel/UCsy22KwkQ-1xUtlfUUzuzfg/playlists?view=1&flow=grid&sort=da>> [accessed 10 September 2017].

10 Questionnaire from Liam Dewar, Eurban, 15 September 2017.

11 KLH UK, Frequently Asked Questions, 2017 <[http://www.klhuk.com/media/11553/frequently%20asked%20questions\\_05042011\\_1.pdf](http://www.klhuk.com/media/11553/frequently%20asked%20questions_05042011_1.pdf)> [accessed 10 July 2017].

12 Questionnaire from Liam Dewar, Eurban, 15 September 2017.

13 Robin McKie, *Smog in the cities: the truth about Britain's dirty air*, The Guardian, 2017 <<https://www.theguardian.com/environment/2017/jan/29/pollution-air-quality-london-environment>> [accessed 8 September 2017].

14 Damian Carrington, *Electric cars are not the answer to air pollution, says top UK adviser*, The Guardian, 4 August 2017 <<https://www.theguardian.com/environment/2017/aug/04/fewer-cars-not-electric-cars-beat-air-pollution-says-top-uk-adviser-prof-frank-kelly>> [accessed 10 September 2017].

15 Planet Ark, Make it Wood, Housing, Health, Humanity, 2015 <<http://makeitwood.org/documents/doc-1253-wood--housing--health--humanity-report-2015-03-00-final.pdf>> [accessed 20 November 2017].

16 Planet Ark, Make it Wood, Housing, Health, Humanity, 2015 <<http://makeitwood.org/documents/doc-1253-wood--housing--health--humanity-report-2015-03-00-final.pdf>> [accessed 20 November 2017].

Sandra van Dijk, Wood improves air quality, moderates humidity, Climate Control News, 27 March 2017 <<http://www.climatecontrolnews.com.au/ventilation/wood-improves-air-quality-moderates-humidity>> [accessed 20 November 2017].



# DESIGN FACTORS

As a high quality engineered product, the material cost of CLT is typically around 30-40% higher by building volume than traditional structural materials. The cost is determined by a range of factors including the dimensions, quantity and whether conventional hydraulic pressing or more specialist vacuum pressing is required (needing more time and labour), the complexity and scale of the project and the finish or grade of timber used.

While there is a higher apparent cost, a CLT structure provides far more than a basic structural frame. It will usually include external and internal walls, stairs and lift shafts. Additionally, there are a number of consequential savings resulting from the lightness, accuracy and workability of the timber.

A lack of awareness of the potential benefits can result in cost consultants using a base cost per square foot of floor area for the frame, showing CLT as a more expensive solution. Working with an engineer, cost consultant and main contractor experienced in the construction of CLT buildings is key to ensuring the various possible savings are realized and accounted for.

## **OPTIMIZING**

To ensure an optimized scheme it is essential to design a project as a CLT structure from the outset. CLT members do not perform in the same way as concrete and steel. Designing with an appreciation of the benefits and restrictions of the system will lead to a far more efficient architectural solution. This approach also ensures that all the associated benefits can be planned for. While schemes can be adapted for CLT at a later stage this can result in missed opportunities and diminished savings.

Key to the delivery of a CLT scheme is the appointment of a design team that is enthusiastic to engage with CLT construction from an early stage in the design process – this was directly identified by nearly a quarter of the case study respondents as a key lesson learned. The following section outlines the ways in which working with the right team can reap rewards.

## **STRUCTURAL PRINCIPLES**

CLT uses a large volume of timber compared with timber frame, which increases the volume of carbon sequestered. Even as a renewable resource designers should be considerate and efficient with materials, optimizing the size of elements.

Typically, a CLT solution up to around four storeys would utilize more material than needed to perform the structural work required, however the same is often true for concrete frames in low rise schemes.<sup>1</sup> For buildings of this scale, a timber frame or SIPS structure may be more appropriate, solely utilizing CLT panels for the floor slabs and core.

While CLT is often not the most structurally efficient solution for low rise schemes, the other benefits of CLT often merit its use, for example the simplicity of a CLT structure and the performance of the panels and quality of construction.

## MATERIAL EFFICIENCY


It is evidently advantageous to optimize panel use to reduce material use and therefore cost. Further savings can be achieved through progressively reducing the thickness of wall panels up the height of the building which uses less material, reducing the overall loadings.

In addition, floor build-ups in CLT are typically less than those achievable using more traditional methods, which can lead to overall reductions in floor to floor heights. Over a taller building this incremental gain can enable an additional storey to be built within a height limit, or alternatively allow for more generous floor to ceiling heights.

## CUTTING AND ROUTING

While basic routing of openings will be included within the cost of CLT panels, more complex cutting can significantly increase costs.<sup>2</sup> An increase in the time spent on the cutting bed, particularly complex routing on both faces, requiring turning or rotating of the panel, will impact the cost of the panels. In many cases, however, this can be offset by material and time savings where site work is reduced.

Another primary consideration when planning openings is the lost material. In most facilities, the off-cut CLT is processed into biomass, however the costs tend to be based on the volume of the full panel.

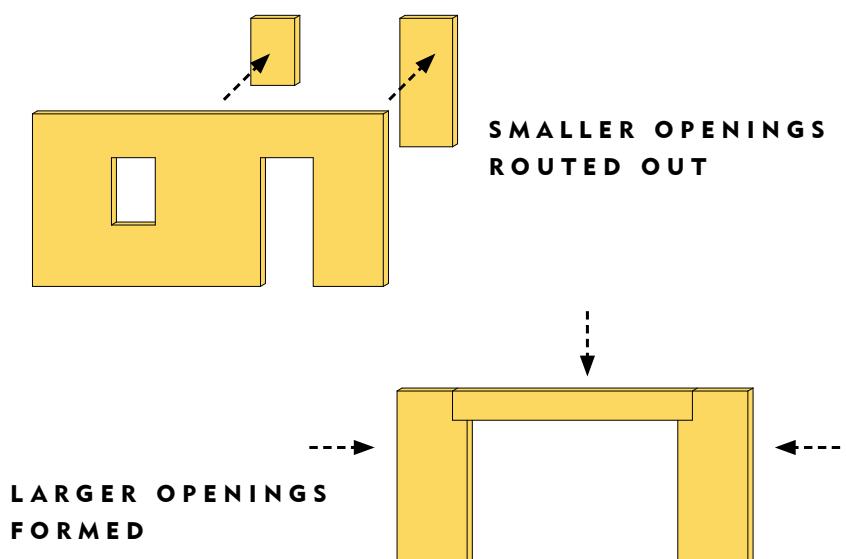

Where particularly large openings are needed it can be more cost effective to form openings from multiple pieces of CLT. The benefits should be considered against the additional lifts on site and additional joints that can increase the construction period and have the potential to reduce accuracy and structural performance.


For most residential scale openings, a small loss of material tends to be the more cost effective option. Working with engineers familiar with the dimensions of CLT panels will ensure openings are designed in the most efficient way.

On occasion these offcuts can be re-used within the scheme itself. For example, in Kingsdale School (pg.106-107) and MK40 Tower (pg.268-269), dRMM used the cut-out material as furniture, retaining the value of the material within the project.

Often more than one project will be nested on a production run to improve factory efficiency. An understanding of the manufacturer's panel nesting process can therefore also result in savings.

## TRANSPORTATION CONSIDERATIONS

Transport costs typically represent around 10% of the overall cost of a CLT frame. Transporting panels is most cost effective if they are stacked regularly and compactly with no wasted space and no requirements for wide or long loads, which may require road closures or police escorts. Large cut-out openings or complex shapes can reduce this efficiency and increase transportation costs.

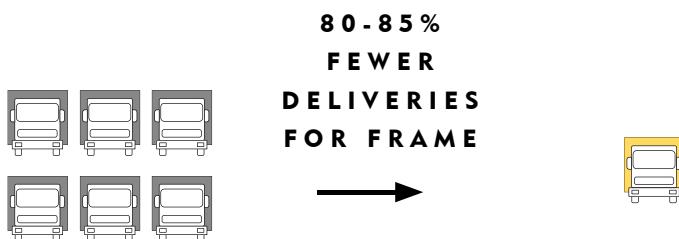



The light weight and prefabricated nature of CLT construction typically offers an enormous reduction in the number of deliveries to site, compared with concrete frame, especially when schemes are designed with an understanding of delivery parameters. In comparison to in-situ concrete frames, around 80-85% fewer deliveries are required for a CLT structure, greatly reducing the impact of site logistics on the surrounding community.<sup>3</sup>

This is particularly beneficial for tight urban sites. Constraints and restrictions to delivery or installation should always be considered at an early stage to ensure the smooth erection of the structure. Parking, loading areas, turning and over-sailing are all issues that should be addressed.

In some projects the delivery and/or installation of the panels is particularly constrained by the site. For example at The Garden Museum project (pg.272-273), the CLT structure had to be erected inside the volume of the existing church with panels brought in through the door. Understanding and acknowledging such constraints from the outset can influence the design by working to a more appropriate 'typical' panel width or length.

Even for more conventional schemes, site access can pose issues or restrict certain delivery vehicles. At Wynch Cottage (pg.156-157), the CLT design was coordinated with the access constraints of the site, but relied on the creation of a new, more easily accessible, road between the mature trees. The CLT delivery strategy then had to be changed considerably when delays on site meant the new road was not completed in time. To avoid further delay to the structure, the panels were double handed to arrive on site via a specialist lorry that could negotiate the tighter route.

Working with a knowledgeable team will ensure these potential issues are raised early and addressed within the metrics of the scheme.




## HYBRID SOLUTIONS

Different building types require different structural solutions. It is essential to determine early in the design whether a pure CLT structure or CLT panels combined with other structural materials is the most appropriate solution.

The diagrams illustrate the typical ratio of spans possible where the same thickness of CLT panel is used, by itself, with glulam beams or with steel beams of equivalent depth. Multiple options are possible within each of these structural systems.

Pure CLT solutions create a honeycomb of structural walls and floor slabs resulting in cellular spaces. Optimizing spans to approximately 15ft with a maximum of 25ft (4.5-7.5m) ensures a reasonable thickness of CLT is used. This span is akin to that of most typical domestic rooms making pure CLT solutions particularly appropriate for residential projects. These schemes are easier to benchmark in terms of the expected cost for a CLT frame per ft<sup>2</sup> as the structures are relatively similar from project to project.

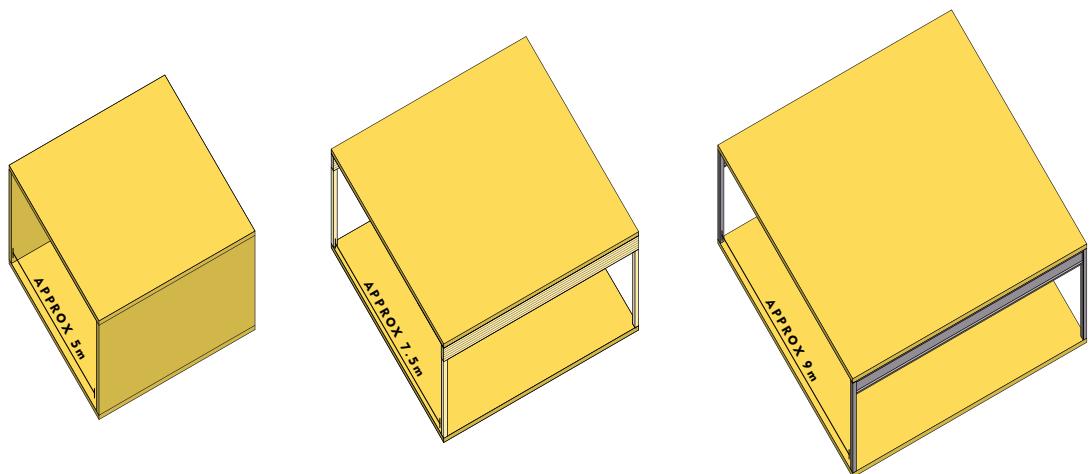

### PURE CLT

CLT forms all principal structural elements.

### TIMBER HYBRID

Utilizing CLT slabs with glulam columns and beams.

### HYBRID

CLT slabs supported by a concrete or steel frame.

Hybrid systems can be used to achieve greater spans without requiring thick timber slabs. Such solutions are typically either CLT with glulam; that is all timber, or CLT with steel and possibly concrete. Other hybrid solutions include the use of concrete cores with CLT floors and walls for the habitable space or glulam and concrete structures. Hybrid solutions using additional materials can require additional contractors and personnel on site and increased co-ordination for the interfaces between materials.

Glulam, steel and precast concrete systems all work well with a CLT frame as they can also be factory produced requiring the same level of detail at the same stage and achieving high levels of accuracy and tolerances. The selection of these material combinations ensures that the use of a hybrid solution does not negatively impact on the time advantages associated with CLT. Glulam has the additional benefit that it is of the same material and so reacts to environmental changes in a similar way which can help to simplify details.

Many CLT suppliers will be able to model and draw steel elements meaning that they can be signed off and ordered at the same time as the CLT, however varying lead times and a lack of flexibility to alter these elements later in the program can be restrictive.

The relationship between structural approach and sector is clear from the data obtained from the 100 case studies. Commercial projects that require more open plan adaptable spaces often use hybrid solutions. Similarly, education schemes typically combine smaller cellular spaces for classrooms, and larger span spaces, for auditoriums and sports halls which are also hybrid, while residential schemes tend to be pure CLT. If the high density residential schemes are separated out from the individual bespoke houses then the percentage that are pure CLT becomes even higher at 70%.

For lower rise applications such as individual dwellings and schools, the reduced structural demands on the CLT can enable some unique and clever approaches to pure CLT frames achieving open spaces of substantial volume.

# MATERIALITY

## EXPOSED TIMBER

The aesthetic qualities of the wood are often one of the reasons for selecting timber as the structure with the potential for cost savings on wall and ceiling linings adding to the attraction. The visual appeal was reported as a primary factor in choosing a CLT structure for 52 of the schemes, whilst the timber is exposed to varying degrees in 88 of the schemes.


Exposed timber is more prevalent in the education and commercial sectors than other typologies, with it being featured least in mass residential projects. This results from the need to add acoustic and fire protection measures which are most easily achieved through lining and encapsulation of the timber. Furthermore, the onerous provisions for safe escape limit the possibility of exposing areas of timber. This is not the case in single dwellings, with 90% of these case studies featuring exposed timber.

## CLADDING


A solid timber structure is just as versatile as a steel or concrete solution and can be clad in any material with the same considerations for water ingress and longevity. The key requirement is to include a cavity to ventilate the panels and keep the timber dry.

In many cases fixing to CLT is more straightforward than fixing to concrete and steel due to the finer tolerances and the ease of working. However, it should be recognized that the fixings used for brick ties, cladding rails and framing systems tend to be bespoke for timber and should be specified as such. Additionally, fixing zones should be established to avoid screwing into the end grain of panels.<sup>4</sup>


The use of a masonry outer leaf such as brick or rendered block, can have the benefit of further stabilizing the structure by increasing the dead load. Although for larger scale buildings, the weight of brickwork hanging off the structure can be considerable and may impact on the overall design and the volume of timber needed.<sup>5</sup>




- Exposed
- Not exposed




- Soffit/Ceiling
- Stair
- Walls
- Beams

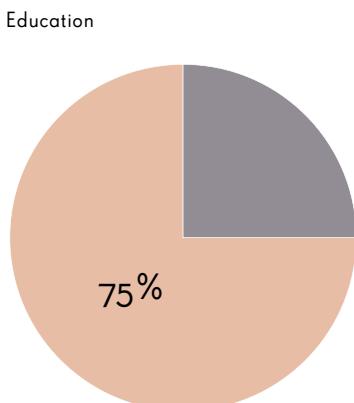


- Exposed
- Not exposed




- Soffit/Ceiling
- Stair
- Walls
- Beams

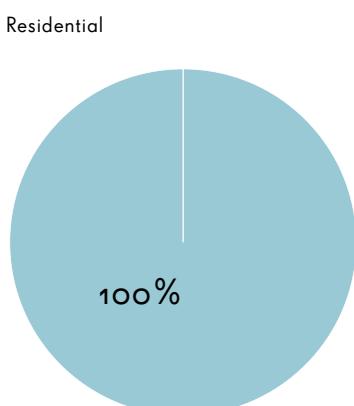


- Exposed
- Not exposed



- Soffit/Ceiling
- Stair
- Walls
- Beams

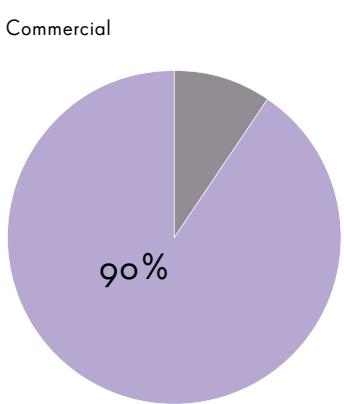

- Exposed
- Not exposed



- Soffit/Ceiling
- Stair
- Walls
- Beams

Given the primary drivers for using CLT tend to be the embodied carbon and light weight, there is a tendency to use cladding solutions that match these principles. For example at Whitmore Road (pg.192-193) a British Sweet Chestnut cladding echoes the core structural material. Of the case studies, 26 use a render or low density cladding board and 47 incorporate solid timber external cladding.

## **WATER**

The softwood typically used for CLT is factory dried to a moisture content of 12% (+/- 2%)<sup>6</sup> at which level it will not deteriorate. However, where CLT is exposed to sustained high levels of moisture (over 20% moisture content), decay is likely to occur.<sup>7</sup> The probability of decay also being influenced by the temperature and oxygen supply. It is therefore imperative to ensure that CLT structures are designed, constructed and maintained to ensure that contact with water is minimized and that any moisture is not trapped.

In order to avoid inherent defects or installation errors, it is essential that the designers and contractors, including follow-on trades, are made aware of the specific nature and vulnerabilities of CLT. Inclusion of a specification giving detail on mitigating weather issues is advisable as part of the installation contract.

The interface with the ground is of key importance and in most instances it is advisable to lift the CLT from external ground level by a minimum of 6 inches (150mm). While it is possible to design with the CLT sitting straight on the ground level slab, any failure in waterproofing or in workmanship can lead to issues with the base of the panel. In detailing the connection between the timber and the substructure particular attention should be given to ensure that water is not able to collect at the base.

In many cases the CLT is built on a podium level constructed from concrete. As well as lifting the timber off the ground, this concrete podium can assist in transferring loads across the ground floor where the program, particularly in residential developments, requires a very different internal arrangement to the floors above, due to a difference in use.

In general, the CLT structure should be designed to be warm - that is, any external elements should be outside of the insulation layer. This ensures that the dew point does not occur within the material.

For internal wet areas, such as bathrooms, additional consideration should

be given as to how to avoid water traps where minor leaks could create sustained moisture build-up over time.

## VENTILATING THE TIMBER

CLT is designed for use in dry, internal environments only - it is only suitable for external use where protected in a thermal envelope and kept dry.<sup>8</sup>

When designing for airtightness, it is essential to ensure that all elements of the timber structure are able to breathe to allow them to dry out should any moisture get into the panels through rain during construction, humidity variations or leakage of services.

Ventilation is also advisable above roof panels and completely flat roofs should be detailed carefully to avoid surface water pooling and vulnerability from failures.

If the timber is in contact with free-flowing air it will tend to revert to the ambient moisture content. If the timber itself forms the airtightness line then, assuming there is a ventilated cavity, this is not an issue as the panels are exposed to fresh air to absorb the moisture.

If a membrane is used it is vital that a vapor permeable membrane is specified to prevent locking in moisture. In traditional construction a vapor control layer to the internal face forms the air tightness line whilst with CLT construction this is not typically required as the panels can form the air tightness line when taped externally. This is supported by the large number of respondents that indicated the air tightness line to be on the outer face of the CLT.

## INFESTATION

CLT is generally considered to be invulnerable to insect attack, as noted within European standard DIN 68800-2 (6.3b), which states that "... the exclusive use of glued laminated timber, cross laminated timber, artificially dried building timber or wood-based panels with a moisture content  $u > 20\%$  in service is sufficient to avoid structural damage by insects".

Many suppliers provide panels with a treatment to resist against a wide range of potential species. However, consideration should always be given to the suitability and robustness of these applied treatments where local conditions, or legislation, may necessitate a specific solution.

# PROCESS

## FINALIZING THE DESIGN

In comparison with more traditional forms of construction, the procurement of CLT requires a greater level of coordination earlier in the design process including the full coordination of the mechanical and electrical services. This upfront coordination means that all openings can be cut in the factory, avoiding the need to make changes to panels on site. While amendments on site are possible, this can be costly, may reduce the benefits of factory precision and can require re-calculation of the structure.<sup>9</sup>

Prefabrication of panels in the factory offers accuracy and quality, optimizing material use whilst vastly reducing site waste. The ability to accurately route various joints, profiles and openings enables easy assembly of complex forms and sufficient certainty of structural opening dimensions to pre-order elements such as windows, doors and grilles.

To ensure sufficient coordination, it is important to allow both time and budget for a front-loaded design period which is likely to require a larger draw down of fees for architects, engineers and consultants early in the program. Furthermore, capital input can also be required earlier in the project in order to purchase the CLT package and other prefabricated elements.

Typically for the UK market, the final coordinated drawings and structural model need to be completed 6-12 weeks before the first panels are scheduled to arrive on site. Within this lead-in period the first 3-6 weeks will allow for checking and production of manufacturing drawings, with the latter 3-6 weeks set aside for production and delivery.<sup>10</sup> The length of lead-in time can vary due to the complexity of the project, the supplier and the time of year.

Accounting for this, the site mobilization and ground works can be completed within the lead-in period and be ready for the arrival of the first panels.

## BUILDING INFORMATION MODELLING

With the increased uptake of Building Information Modelling (BIM), the typical design workflow on projects is changing, with design freezes occurring in earlier stages of the work. This is primarily a result of the increased collaborative design work, with the principal disciplines working on a common model allowing the integration of structure and services with the architecture as the design develops. This 'front-loading' of design suits the procurement of CLT very well as it is advantageous to be able to sign off the superstructure design to allow for the lead-in for fabrication and to maximize the program advantages.

Through the use of a shared BIM model by the various consultants involved, the coordination of all openings required is made considerably more straightforward, enabling the completion of the fully coordinated design in time for the panel production.

A number of CLT producers are in the process of making their building systems available as digital objects for download. These will generally include wall and floor components as well as the wall and floor structural panels.

The current process of procuring panels does not yet take full advantage of the possibilities that further BIM levels offer. With the panels being cut by CNC (computer numerical control) routers there is no technical reason that the model created by the design team cannot be used as the basis for the fabrication.

In practice, however, the CLT manufacturer will normally produce their own model within the CNC software, taking account of the panelization and optimizing to minimize waste.

## **COMPETITIVE TENDERING**

Currently, there are no universal parameters for CLT panels, with each manufacturer supplying a slightly different product range. This can create issues for competitive tendering as schemes should be designed to suit a particular manufacturer's panel sizes to optimize the system.

To ensure the best price is obtained it is beneficial to work with an experienced structural engineer with specific knowledge of CLT construction and an understanding of the various products available. This knowledge can inform the production of an outline design based on structural parameters, which will enable multiple suppliers to bid for the work.

At tender it is common for each manufacturer to propose two quotes: the first is based on the generic design received, the second on an optimized scheme if the supplier can identify possible further efficiencies.

The successful tenderer can then be identified to the principal contractor and allowances for program and cost made within the main contract. Once appointed under the main contract the CLT provider works with the construction team to refine the design and finalize connection details.

This approach can add an additional step to the tender process but it ensures that competitive prices are received by the client and should avoid any redesign that can be required should a different CLT supplier be appointed to construct the scheme.

On the Dalston Works scheme (pg. 228-229), the engineer, Ramboll, produced a tender information set that identified the characteristics of each panel based on the specific systems of the three main manufacturers. Color coded drawings were issued with a key to identify the panel type of every wall and floor panel. To our knowledge, this was the first time that a CLT structure was able to be competitively tendered on a full structural design.

## Endnotes

1 Chris Wise., What if everything we did was wrong? Building Online, 2010 <<http://www.building.co.uk/what-if-everything-we-did-was-wrong/?5000493.article>> [accessed 20 August 2017].

2 KLH UK, Frequently Asked Questions, 2017 <[http://www.klhuk.com/media/11553/frequently%20asked%20questions\\_05042011\\_1.pdf](http://www.klhuk.com/media/11553/frequently%20asked%20questions_05042011_1.pdf)> [accessed 10 July 2017].

3 Questionnaire from Liam Dewar, Eurban, 15 September 2017.

4 Gavin White, Ramboll, Interview by A.Thistleton & R.Sawcer, London, 8 September 2017, Waugh Thistleton Offices.

5 Gavin White, Ramboll, Interview by A.Thistleton & R.Sawcer, London, 8 September 2017, Waugh Thistleton Offices.

6 Questionnaire from Kay Hartmann, KLH UK, 11 September 2017.

7 Questionnaire from Gareth Mason, Stora Enso, 8 September 2017.

8 KLH UK, *Technical Characteristics*, 2017 <<http://www.klhuk.com/media/29233/technical%20characteristics.pdf>> [accessed 10 September 2017].

Stora Enso, Technical Brochure, 2017 <<http://www.clt.info/wp-content/uploads/2017/09/Technical-brochure-CLT-EN.pdf>> [accessed 10 September 2017].

9 Ian Brooks, Kier Eastern, Interview by R.Sawcer, 12 September 2017, Telephone.

10 Questionnaire from Gareth Mason, Stora Enso, 8 September 2017.  
KLH UK, Frequently Asked Questions, 2017.



# MATERIAL PERFORMANCE

Being a wood product, cross-laminated timber is often associated with timber frame construction, however the performance characteristics of CLT are very different.

As a panelized form of construction, CLT has more in common with prefabricated concrete panel construction, albeit with improved workability, flexibility and weight.

While there have been a wide range of tests on the behavior of CLT in fire and the thermal and acoustic characteristics, much of the performance data of a material comes from in-use testing. Clearly, as a relative newcomer to construction, there are fewer precedent CLT buildings however this is changing rapidly as more schemes are completed and the industry as a whole is working to accelerate testing to be able to best inform designers.


# FIRE

As wood is combustible it leads to an inevitable concern about the fire performance of timber buildings. However it is important to understand that all materials have their limitations when exposed to a fire. No construction method or material is immune to fire so this should not be a constraint particular to building in timber, but an important design parameter for all construction.

While CLT is now well established and there is significant standard test data on which to base fire mitigation design, continuing research is required to ensure that these assessment methods reflect the risks posed by engineered timber.<sup>1</sup>

In many cases, specialist fire engineering is essential to minimize risk and ensure the structure and linings present an appropriate solution. The key principles for design are to devise the appropriate fire strategy at the early stages, clearly establish the responsibility for who implements each part and to make sure that the construction stages are included.

## WOOD VS STEEL: LOSS OF STRENGTH IN FIRE

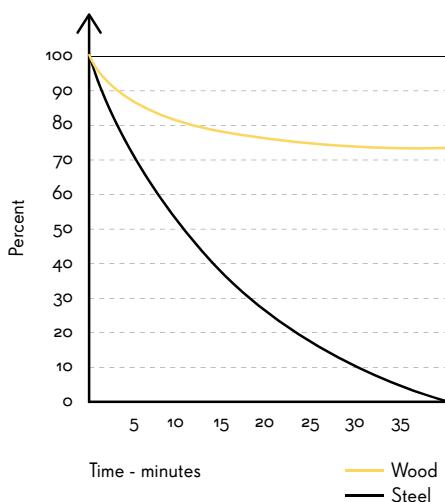

## **LEGISLATION**

Until the early twentieth century most UK fire legislation was made in response to catastrophic events that resulted in substantial loss of life. Typically 'stable door' legislation is aimed to prevent recurrence of such events and is therefore targeted at the conditions that led to the incident.<sup>2</sup> In the UK, for example, the Great Fire of London, in 1666, resulted in a number of statutes relating to building materials, architectural form and the separation between buildings. These and much of the legislation over the next 200 years related to prevention of the ignition and subsequent spreading of fires.<sup>3</sup>

In the USA, the Great Chicago Fire of 1871 led to sweeping reforms both statewide and across the continent and subsequent fires have led to further updates in legislation leading to the Federal Fire Prevention and Control Act of 1974.<sup>4</sup>

To a large extent, local fire codes across the world tend to be highly prescriptive, with limits to the use of combustible materials, such as timber, for building structures over a certain height or for elements such as stairs.

In contrast the UK building regulations, part B of which covers fire, set a series of requirements that must be met. This allows a certain degree of interpretation and a system will be approved if it can be demonstrated to meet the objectives of the regulations. This ability to assess the site, building system performance and occupancy conditions on a per project basis allowed the first tall timber buildings to be constructed without a change to the legislation and has contributed to the rapid expansion of CLT use in the UK.

As CLT use develops and taller structures become more widespread, more codes are being adapted to accommodate modern engineered timber although this is a slow process and restrictions still apply in many locations.

## **DEALING WITH FIRE AUTHORITIES**

As long as CLT is still perceived as a novel material, early engagement with local fire authorities is strongly recommended.


In most situations, those who enforce fire codes have been front line fire fighters so they have an implicit understanding of how fire behaves. When a fire officer is given an opportunity to view a CLT structure under construction, many concerns are quickly allayed.

At Dalston Works (pg.228-229), initial discussions with fire officers were positive and the principle of the structural design and fire protection was accepted. However as more detail of the project was submitted and the fire authority carried out further assessment, they raised a number of concerns, specifically in respect of smoke temperature. Detailed smoke modelling was subsequently carried out, which demonstrated that additional fire protection within elevator shafts was not required as the maximum temperatures that would occur would not cause charring or ignition of the timber.

## FLAMMABILITY / PYROLYSIS

The energy required to ignite a large timber panel is significantly higher than that required for a plank or stud meaning that fires are unlikely to start with the CLT.

The behavior of CLT is that it will begin to char once it is exposed to temperatures of 570°F (300°C) and above.<sup>5</sup> As the face of the timber chars, the zone of wood inside is heated, known as the pyrolysis zone in which the wood starts to undergo thermal decomposition. A 'zero strength layer' of heated wood exists behind the char which has lost any structural performance. Beyond this the wood is unaffected and will function structurally as normal.

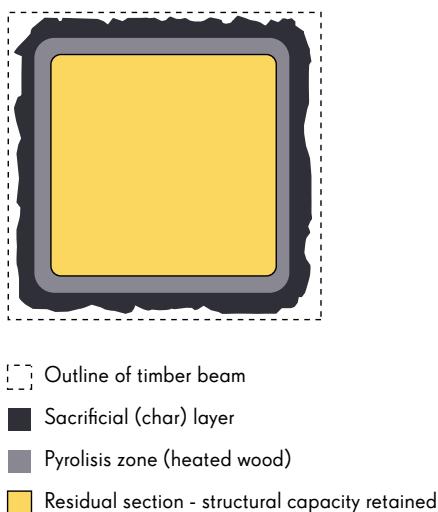

Typical spruce CLT panels char at a average rate of around 1/4 inch in ten minutes (0.7mm/min), with the initial rate on each layer exceeding this temporarily.<sup>6</sup> By oversizing elements to allow for a sacrificial zone, the relevant fire performance can be met. The structural stability can then be

maintained through no additional coatings or covers. If several layers of the CLT panel are predicted to burn off within the fire integrity period then a modified charring rate is used to allow for the increase in charring rate when burning between the layers, at which time the initial layer may fall off or catch alight, known as de-lamination. It is, however, preferable to deal with this by using thicker boards for the outermost layers that are sufficient for the char of the entire fire integrity period.

Beyond this, additional fire performance is achieved through encapsulation, that is by adding fire protective barriers such as plasterboard or fire-board. Typically, a high degree of fire separation, such as 90 minutes or above, will be achieved through a combination of both sacrificial timber and fire-board.<sup>7</sup> When using this approach, it is essential that heat degradation of the timber behind the board is considered and calculated as the CLT will initially char at a higher rate once the board fails.

## FIRE PERFORMANCE

The timber was said to have contributed to the building's fire performance in 60 of our 100 schemes.

It is noteworthy that several of the responses indicated the timber's performance could have further contributed to the fire integrity had the consulting fire engineer allowed the fire performance to be provided through a combination of partial encapsulation and partial charring.

Of the 100 schemes, 65 employed a fire engineer to advise on the best approach to fire protection of the structure. The proportion was higher for large commercial and residential schemes. However, a similar percentage of large scale building projects would involve a fire engineer within the construction industry as a whole. The results of our study, therefore, show that building in timber does not appear to have increased the involvement of these specialists.

## SPREAD OF FLAME

Where the timber structure is exposed, designers need to consider the potential for fire to spread rapidly by tracking across large flammable surfaces. Untreated, CLT is defined as class D-s2,do (Class III surface lining) under European regulations, as it produces low levels of smoke and no flaming droplets despite being a combustible material.<sup>8</sup>

A number of chemical retardants are commonly available to reduce or prevent the spread of flame, however these may have a wider environmental impact both in their production and in limiting the timber's re-use at the end of the buildings life. They also need to be maintained or reapplied every few years.

Of the schemes with exposed timber 84% required treatment for spread of flames, of those that didn't most were small low-rise schemes. This indicates the importance of escape times, travel distances and the number of occupants as required by the UK building regulations.

## CONNECTIONS

The connections between the timber panels are of critical consideration. While the timber panels themselves may perform well under fire, if the connections fail then the stability of the building will be quickly undermined.

Most connectors are fabricated from steel and the performance of steel in high temperatures deteriorates. Typically the connectors will be protected within fire board as part of the overall encapsulation strategy. If the connectors are visible, detailing of the interface between the connector, the fixing and the CLT should be considered to prevent heat transmission into the timber which could cause adverse charring and failure of the fixing.


## SPRINKLERS AND OTHER SUPPRESSIVE SYSTEMS

The International Fire Sprinkler Association (IFSA) asserts that automatic fire sprinkler systems are the most effective fire protection measure available, as to date there has never been multiple loss of life due to a fire that has developed in a building with a properly designed, installed and maintained sprinkler system.<sup>9</sup>

However, it is important to note that no suppression system is guaranteed to function all of the time and therefore designs must consider the potential that a sprinkler system could malfunction or be out of service for maintenance.<sup>10</sup> Equally it must be recognized that sprinklers will only slow down the rate of fire growth and are not intended to extinguish it. Sprinklers should be considered as an additional measure following consideration of escape distances, sufficient structural performance in the event of charring or encapsulation and spread of flame.

Sprinklers were only used in 10 of the schemes, of which 7 were educational. This is unsurprising as fire strategies for schools are usually very thorough regardless of the structural material due to the need to evacuate such a large number of vulnerable children. It appears, therefore, that sprinklers do not seem to have been an essential mitigating addition for engineered timber structures.

It is interesting to note that for the Hastings Pier scheme (pg.304-305), by dRMM, sprinklers were incorporated due to the location of the building (being in the middle of a pier, 500ft (150m) from the shore) as opposed to the use of a timber structural system.<sup>11</sup>

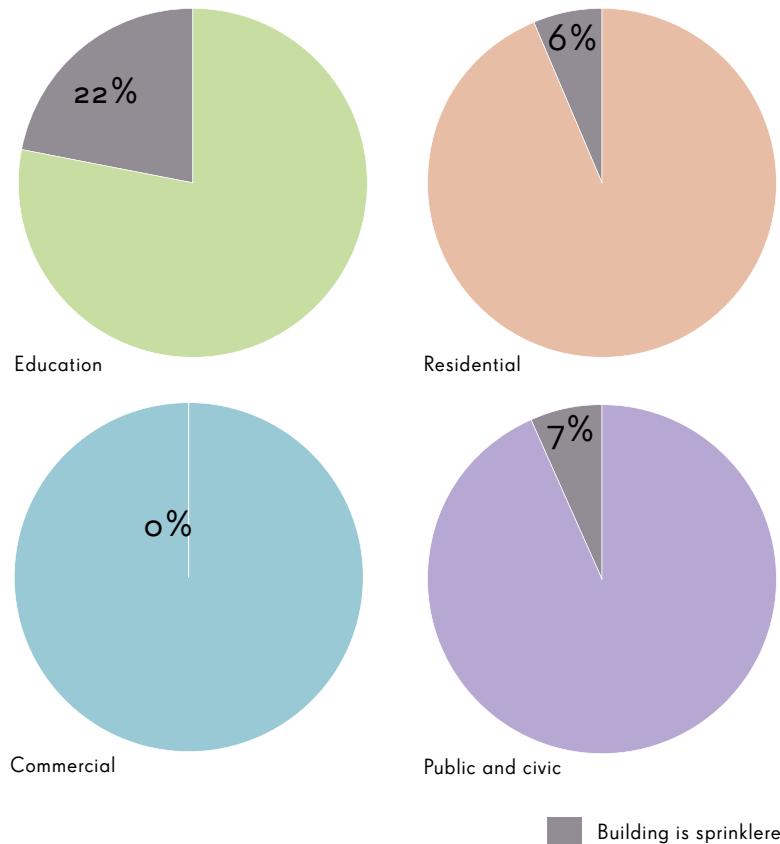

# **THERMAL PERFORMANCE**

## **CONDUCTIVITY**

Timber has a low thermal conductivity, which reduces the risk of thermal bridging, which is a common concern in steel or concrete buildings. This can simplify detailing and assist with structural design. For example, in some cases an internal floor slab can be continued outside to form a balcony without a thermal break.

Timber also has a relatively high thermal storage capacity, given it's density, which ensures it not only insulates against cold ingress in winter months but can protect against summertime overheating. Timber naturally regulates heat and moisture, creating high quality internal environments, especially where the surface is exposed.


The low thermal conductivity of timber also allows a reduction in the quantity of insulation. This can help reduce quantities of high-embodied carbon materials, however more essential to ensuring excellent thermal performance is good detailing - building in CLT does not guarantee a thermally efficient building.

The standard method of calculating thermal transmission is via R-values, measured in  $\text{ft}^2\text{°Fh/Btu}$ .<sup>12</sup> Timber elements give low psi values, a factor used in thermal bridging calculations. This helps within SAP calculations to reduce the R-value needed to achieve specific targets aimed for in the UK energy accreditation system BREEAM and other codes.

Under many certification regimes, including BREEAM, credits are given for exceeding the base thermal performance. Higher levels of thermal performance were targeted in 27 projects.

## MASS

If exposed, the thermal mass of traditional concrete and masonry structures is excellent at regulating temperature change and reducing the heating or cooling loads through passive thermal storage. CLT panels are not as thermally massive as concrete so they are less able to perform this role, however there are alternatives to creating thermal mass. At the Woodland Trust Headquarters (pg.240-241), concrete 'radiators' were bolted to the underside of the CLT panels to work structurally with the timber and to provide the additional thermal mass required for night cooling. Where the structural material is not exposed, its ability to perform this function is greatly reduced in which case the comparative performance of CLT is not as significant. The use of 'phase change' materials can also replicate the beneficial effects of thermal mass.

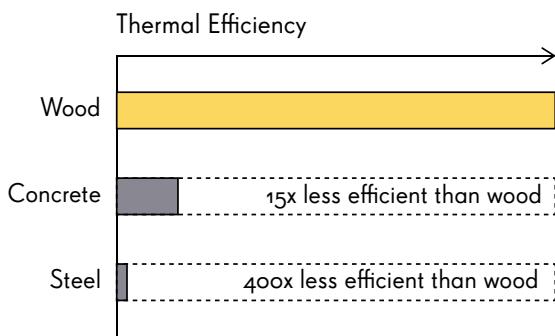

© Yugon Kim

Notwithstanding this, changes in the internal temperature of timber lag behind changes in the external temperature. This 'phase shift delay' that occurs naturally helps reduce summertime overheating from high external temperatures and can also aid in levelling out daytime and night time temperatures by transmitting heat from the middle of the day through the night.

## DYNAMIC RESPONSE

Standard R-values assume a steady-state flow of heat through the element and do not take into account the thermal buffering of the material through thermal mass. More research is necessary to establish how timber performs against other materials such as masonry.

By using a static model, the timber's performance is often underestimated resulting in most CLT structures outperforming their design parameters.

If the true performance of timber could be accurately calculated, this could be taken into account, reducing the volumes of additional insulation products needed along with reduced cost and thinner walls. While monitoring the performance of timber based façade systems to obtain data would assist in refining the understanding of their behavior, most efficiency accreditations are based on calculations only, which diminishes the incentive to monitor completed buildings.


As CLT is a solid material there is no room within its structural depth for the use of conventional infill insulation to supplement its performance. As a result of this, the increased performance offered by CLT is not necessarily reflected in reduced wall thickness.

#### AIR TIGHTNESS AND ACCURACY

Another advantage of CLT in terms of thermal performance is the high level of airtightness that can be achieved. The accurate cutting means the panels fit together well, with tape applied at the connections between panels and penetrations all sealed appropriately. Most panels can be used to create an airtightness layer to the building envelope.<sup>13</sup>

This is reflected in the 65 schemes in which the timber was noted as contributing to the buildings air tightness.

Many schemes exceeded the airtightness targets, some by a considerable margin. Of the schemes investigated, 46 used tape alone to achieve airtightness, indicating how many designs are taking advantage of this additional performance, while only 27 used a membrane in addition to the panels. Accuracy of prefabrication was a primary factor in choosing a CLT structure in 15 of the schemes.

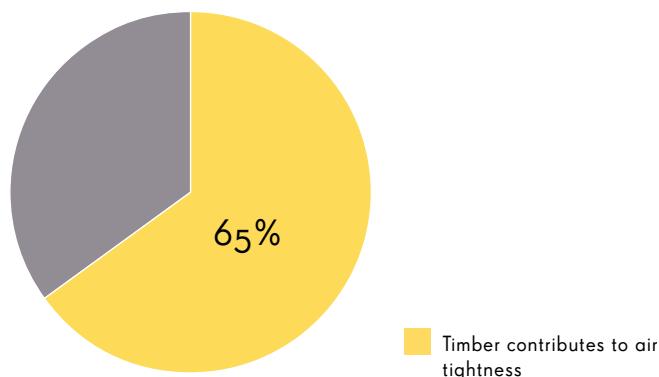

## ACOUSTICS

Most acoustic design relies on data from a multitude of similar historical installations. Thus, there is a wealth of knowledge of the performance of traditional construction details. This allows acoustic engineers to design efficiently and be certain that their designs will perform at the level required. The lack of data for CLT significantly impedes this process.<sup>14</sup> However, we found that in post completion testing, the acoustic performance of many of the schemes exceeded the design levels, often by a considerable margin.

Making the walls from solid timber as opposed to the metal or timber stud walls found in concrete frame construction, can offer significant improvements to the acoustic performance.

For a typical internal wall of an apartment, a CLT wall will offer noticeable improvements over a stud framed counterpart. For acoustic separation between apartments, it is possible to create high levels of insulation by using two panels separated by an air gap, however, it is materially more efficient to use one or two layers of plaster boarding on either side of the CLT, mounted on acoustically insulating brackets.

When designing in CLT, flanking sound is an important consideration. While the density of CLT is an asset both thermally and structurally, the continuity between walls and floors in a CLT structure provides acoustic pathways that could transmit sound over large distances across a building if not insulated. For this reason, acoustic breaks should be used to prevent the transmission.<sup>15</sup> These can be layers of compressible insulating material in the joints between walls and floors, or adjacent floor slabs.

An alternative or complementary approach is to prevent the sound getting into the structure through acoustic build-ups between the habitable spaces and the structure. For walls, this is achieved through using multiple layers of plasterboard, separated from the primary structure.


Impact sound on floor slabs should also be considered. A common solution is to include a layer of concrete screed above a resilient mat laid onto the CLT slab.<sup>16</sup> This can also be a good vehicle for underfloor heating and can help with providing additional thermal mass.

As with any acoustic design, the performance relies on the correct installation. The solidity of CLT construction and the workability of the material assist in limiting the scope for failure of acoustic measures.

As more buildings are completed and tested, this will allow acoustic engineers to design more knowledgeably with CLT. The industry would also benefit from investment in prototype testing to build up the amount of data.<sup>17</sup>

Of the 100 projects, consultants from 60 stated specifically that the timber contributed to the acoustic performance.

The usual thickness of CLT panels across the 100 schemes was 4½ inches (110mm) for walls and 6¼ inches (160mm) for floors. Based on the typical approaches to detailing and typical details across the schemes that we have looked at most added some form of acoustic insulation rather than increase the thickness of the CLT for the acoustic performance. This was certainly the case within all the residential buildings; largely a reflection of the more stringent acoustic requirement in residential buildings.

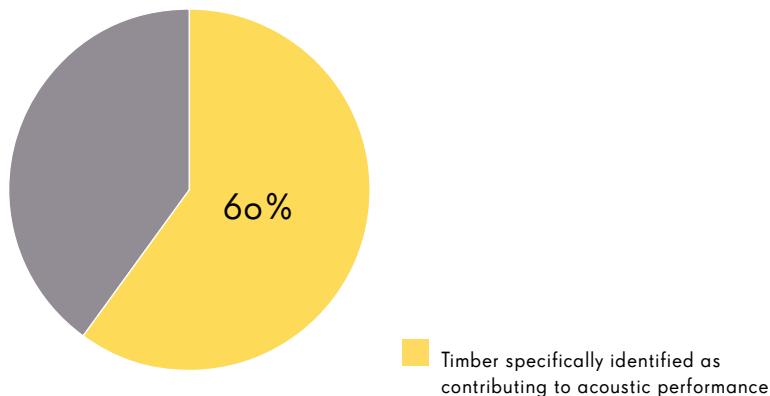

## VIBRATION

CLT offers benefits in terms of strength to weight ratio, but the relatively lightweight nature and stiffness of the material can make it more susceptible to vibration.

Vibration in structure is classified according to the response factor and is based on human perception. The principal source of vibration is footfall with acceptable levels depending on the use of the space; for example within a residential development these might be relatively high within corridors with a far lower requirement from bedrooms.<sup>18</sup>

Other considerations are the size of the span or the use - for example a gym would generate a significantly increased frequency and scale of impact.

Vibration is dealt with through increasing the mass of the slab and adding dampening at junctions.

Typically two solutions are found over the CLT floor slab. These are a lightweight concrete screed or other mass laid on an acoustic insulation and underlay above the slab, or a "dry" solution with chipboards on battens sitting on acoustic cradles with dry insulation between.

Acoustic linings and insulation to ceilings and walls will also help the situation but are more effective for airborne sound than vibration.

The additional mass of the floor build-up will increase the inertia of the floor, which is more difficult to excite by foot-fall. The added materials also distribute the load over a wider area of the CLT, and provide additional damping by the interaction of the CLT panels and build-up.

Another key measure to prevent transmission between apartments is to have discontinuous floor to wall panel junctions, avoiding continuous spans over party walls.

## Endnotes

1       Rory Hadden, University of Edinburgh / The BRE Centre for Fire Safety Engineering, interview by A.Thistleton & R.Sawcer, London, 27 September 2017, Waugh Thistleton Offices.

2       Fire Safety Advice Centre, *History of Fire Safety Legislation*, 2011. <<https://www.firesafe.org.uk/history-of-fire-safety-legislation/>> [accessed 15 September 2017].

3       Fire Net, *History of Fire Safety*, 2009 <<http://www.fire.org.uk/history-of-fire-safety.html>> [accessed 15 September 2017].

4       Fire Files Digital Library, *National Fire Prevention and Control Administration*, 2017 <<https://fire.omeka.net/exhibits/show/nfpca>> [accessed 20 November 2017].

5       Danny James Hopkin, Loughborough University Centre for Innovative and Collaborative Engineering, *The Fire Performance of Engineered Timber Products and Systems*, 2011 <<https://dspace.lboro.ac.uk/dspace-jspui/bitstream/2134/8981/1/Thesis-2011-Hopkin.pdf>> [accessed 18 September 2017].

6       KLH UK, Frequently Asked Questions, 2017 <[http://www.klhuk.com/media/11553/frequently%20asked%20questions\\_05042011\\_1.pdf](http://www.klhuk.com/media/11553/frequently%20asked%20questions_05042011_1.pdf)> [accessed 10 July 2017].

7       Gavin White, Ramboll, Interview by A.Thistleton & R.Sawcer, London, 8 September 2017, Waugh Thistleton Offices.

8       Stora Enso, Cross Laminated Timber Fire Protection, 2013 <[https://www.trada.co.uk/media/5878/13\\_04\\_30\\_clt\\_documentation\\_on\\_fire\\_protection.pdf](https://www.trada.co.uk/media/5878/13_04_30_clt_documentation_on_fire_protection.pdf)> [accessed 20 July 2017].

9       Chief Fire Officers Association, *Business Case for Sprinklers*, (Staffordshire, CFOA Publications, 2013) p.2.

10      Rory Hadden, University of Edinburgh / The BRE Centre for Fire Safety Engineering, interview by A.Thistleton & R.Sawcer, London, 27 September 2017, Waugh Thistleton Offices.

11      Peter Wheeler, Hastings Pier Charity, Interview by R.Sawcer, 19 September 2017, Telephone.

12      Understand Building Construction, Thermal Insulation Explained, 2017 <<http://www.understandconstruction.com/insulation.html>> [accessed 20 November 2017].

13      KLH UK, Frequently Asked Questions, 2017 <[http://www.klhuk.com/media/11553/frequently%20asked%20questions\\_05042011\\_1.pdf](http://www.klhuk.com/media/11553/frequently%20asked%20questions_05042011_1.pdf)> [accessed 10 July 2017].

14      Simon Taylor, Ramboll, interview by A.Thistleton & R.Sawcer, London, 5 September 2017, Waugh Thistleton Offices.

- 15 Simon Taylor, Ramboll, interview by A.Thistleton & R.Sawcer,  
London, 5 September 2017, Waugh Thistleton Offices.
- 16 Gavin White, Ramboll, Interview by A.Thistleton & R.Sawcer,  
London, 8 September 2017, Waugh Thistleton Offices.
- 17 Simon Taylor, Ramboll, interview by A.Thistleton & R.Sawcer,  
London, 5 September 2017, Waugh Thistleton Offices.
- 18 Simon Taylor, Ramboll, interview by A.Thistleton & R.Sawcer,  
London, 5 September 2017, Waugh Thistleton Offices.



# S I T E   F A C T O R S

While there are many benefits on site from using CLT, engaging with the differences in process at an early stage is the best way to maximize these. While many of the schemes reported program advantages as a key driver for the selection of CLT, there has not been any comprehensive guidance for ensuring that all the potential benefits are realized.

It is also essential to ensure that those tasked with constructing the building fully understand the differences in process and material characteristics with CLT.

Many common mistakes that have been reported in the course of this study could be avoided with more comprehensive briefing of the construction team at the outset of site operations.

With CLT entering the mainstream and procurement of the material becoming standardized, more contractors are gaining experience enabling the improvements to build speed and quality to be more readily accomplished.

# OPTIMIZATION

## SEQUENCING

In order to take the best advantage of the potential time savings, the programming of the various packages and subcontractors on site has to be approached in a non-conventional manner. A main contractor with experience building with CLT will understand how CLT impacts follow-on trades. They can therefore maximize this saving, instructing subcontractors to ensure they are mobilized in good time. This scheduling should not be based on experience of traditional builds.<sup>1</sup>

## GROUND WORKS

The lighter weight of the CLT frame generally requires reduced or shallower foundations than a traditional building. This typically leads to a shorter program for ground works, involving less excavation, reduced piling and concrete volumes. These time savings should be factored into the site delivery schedule for the CLT.

## INSTALLATION

The direct install speed of the structure itself is faster than conventional construction methods. Delivered just-in-time, the panels are often directly craned from the truck and fixed into place using hand held tools. The panels are immediately ready for the subsequent floors to be built on top,



requiring no scaffolding for erection and no formwork prior to installation. In comparison reinforced concrete requires setting out, formwork, laying and tying of reinforcement, pouring, curing and striking of the formwork before the next floor can be started. As a result concrete frames can be erected at a rate of around 5,400 ft<sup>2</sup> (500m<sup>2</sup>) per week,<sup>2</sup> whereas CLT is typically installed around 25-45% faster.<sup>3</sup>

As CLT forms full walls rather than just a structural frame the period required for the secondary structure is also reduced.

As a result of these factors and others, the number of operatives required for erection is substantially reduced.



#### PROGRAM OVERLAP

Follow-on trades can begin work on a CLT structure as assembly of the frame continues. This program overlap can significantly shorten the critical path, and is where the greatest program savings can be achieved. Maximizing this opportunity relies on the sequencing arrangement and ensuring the relevant subcontractors are ready and on site to begin earlier than would ordinarily be expected.

#### BACK-TO-BACK PROCESSES

The prefabrication of CLT panels in a factory and the high precision CNC routing/cutting make for an extremely accurate product, with typical tolerances of +/- 1/8 inch (+/- 3mm).<sup>4</sup> This precision allows for the pre-ordering of other factory made products, such as windows and doors. By using these back-to-back processes, fittings can also be delivered just-in-time, potentially reducing the construction period further.

# MATERIAL SAVINGS


## LIGHTWEIGHT

Although CLT is a solid structural material, with a similar structural performance to concrete, it is comparatively lightweight, weighing approximately 35lbs/ft<sup>3</sup> (480-500kg/m<sup>3</sup>),<sup>5</sup> which is around 20% of the weight of the same volume of concrete.<sup>6</sup>

This reduced weight can enable construction on sites with ground constraints, or facilitate an increased accommodation provision where weight is an issue. Similarly, it can enable construction on rooftops and even within existing structures. At Dalston Works (pg.228-229), a restriction on piling due to transit tunnels beneath the site required a raft foundation. For a concrete frame building, a maximum of 86 flats could be built, however in CLT the same loading would be imposed by 121 flats - a significant advantage for the developer.

While the requirement for foundations depends on both the superstructure loading and the ground condition, the lower density of a CLT frame tends to result in a saving in groundworks and reduction in foundations as compared to traditional builds. The related cost saving is generally in the region of 10%. Savings of up to 20% can be achieved if ground conditions are favorable and a mobile crane can be used.



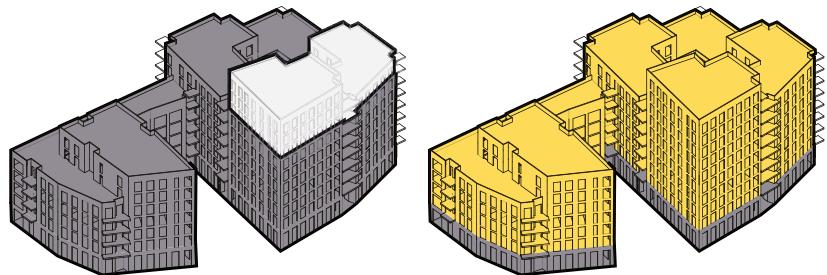

**86 FLATS**

**121 FLATS**

35 additional apartments were possible at Dalston Works as a result of the weight savings from using CLT.

## PRIMARY STRUCTURE

In most cases, the floor build-ups for a concrete frame structure are greater than those that can be achieved in CLT. This can reduce building heights, leading to savings in external cladding, with no loss of internal height. Where height limits are imposed by local building codes or fire protection, there are situations where the cumulative gain can lead to being able to include an additional storey.

## EXPOSING CLT

While exposing CLT can reduce the cost of applying finishes, a more expensive, higher visual grade CLT is often chosen. Typically most manufacturers offer various grades: Non-Visual Quality (NVQ), Industrial-Visual Quality (IVQ) and Visual Quality (VQ) grades, with the cost rising with the level of finish.

In some instances the intermediate IVQ can be used as an exposed surface minimizing the cost increase. The step up to IVQ from NVQ typically increases the cost of a 4 inch (100mm) wall panel by 18%, whilst for VQ this increase is around 35%.

As the increased cost for an upgrade in visual finish is usually consistent, for a thicker panel of 6 inches (160mm) the cost increase is less, at 12% for IVQ and 22% for VQ. In addition, more careful handling of panels and quicker erection can be required where a higher visual finish is desired, this can add additional expense.<sup>7</sup>

# MITIGATING COMMON ISSUES

## DELAYS

Delays are common in construction. The UK Construction Key Performance Indicator Reports, for the period 2005 to 2016, show that on average there are significant program delays in 43% of all construction projects.<sup>8</sup> While delays to CLT buildings will occur, only 7 of the case study projects reported a delay directly resulting from the CLT.

## DELIVERIES

The just-in-time delivery process avoids unnecessary storage on site and double handling of the panels. The CLT provider, with a good understanding of the assembly rate and delivery issues, should schedule this in conjunction with the main contractor. However, with no buffer of stored panels, in the event that a delivery is delayed the full assembly has to stop. In the 100 buildings two responses mentioned a direct delay from the panel deliveries and site access, indicating that the time savings achieved through avoiding double handling appear to outweigh any risk.

## WEATHER

While it is preferable to build during the dryer months of the year, CLT structures can be erected in any season and are less vulnerable to wet weather than in-situ concrete. Unpredictable weather can, however, cause delays on site, particularly on exposed sites.

The safety of assembling large format panels during high winds needs to be considered. Two of the case studies reported delays due to high winds that halted the panel assembly.

CLT frames require protection from prolonged exposure to standing water following rain. Failure to provide this can lead to the issues discussed on page 54.

Where the CLT is to be exposed, a lack of sufficient protection can lead to staining. In most cases water mark stains can be removed by sanding down the surface of the panels. However, in the worst case, panels would have to be replaced or the design changed to include linings.

Careful programming and procurement is required to ensure that covering-up trades directly follow on after the installation. It is also essential to clearly delineate whether the subcontractor or main contractor are responsible for brushing off standing water.

## **WATER**

Consideration of the sequencing should be given at the early stages to minimize the time between delivery and installation of the panels. The CLT should be protected during storage and, once installed, particular attention given to sealing the end grain to the edges of the panels, which is the principal vulnerability.

Where CLT is allowed to get wet, it can swell leading to thickening of the panels. If the source of moisture is removed quickly and adequate airflow is maintained, the CLT will revert to its manufactured moisture content and original dimensions.

Minor exposure is not usually an issue, however where parts of the structure have been subject to significant prolonged water exposure, they should be allowed to dry before further CLT is added to avoid any dimensional issues.

Most importantly, the CLT must be dry in any situation where waterproof membranes are applied. Where this is not ensured, the moisture can be trapped and this could cause long term deterioration of the timber.

As in all construction, workmanship is a key consideration to ensure the building performs as designed. For example, gaps in insulation layers can cause a condensation risk.

## **SUNLIGHT**

Where CLT is designed to be exposed, consideration should be given to the effect of UV light as certain woods can darken fairly rapidly when exposed to the sun. In particular, spruce can tend to redder which can have an impact on the desired tones or cause marks where some parts of the board have been exposed more than others.

# FIRE

## ON SITE

The risk of fire during construction is a key factor for consideration. As previously explained, CLT panels themselves will not easily catch alight and start a fire. However on construction sites there are many other sources for the potential initiation of a fire, from stored and waste materials to construction equipment.

Keeping the site clean and clear of rubbish is essential, as is ensuring all protocols are followed. A fire strategy should be produced during construction on all building sites, not just those for CLT, as the storage of materials and use of many different forms of equipment make construction a high-risk period. In our 100 schemes 40 had a specific fire strategy produced for the construction period. This was more common for large-scale buildings where the risks, complexity and time on site make this more involved.

An example of a fire strategy on a tight urban CLT site is at Pitfield Street in Hackney (pg.232-233). This is bounded on three sides by residential and commercial buildings, and a detailed strategy is in place to protect staff, visitors and neighbors as well as the timber structure and adjacent premises.

Fire safety coordinators were appointed to be responsible for this, and for reassessing the changing escape routes and risks with every floor of the timber structure as it was erected. This includes a radiant heat timber risk analysis and consultation with external fire consultants and local fire station staff.

A secure and tidy site, with adequate escape routes, firefighting points, detection and emergency lighting are essential. A system with call points, sirens and heat detection as well as smoke detection was used in this case, with a maximum 8oft (24m) escape distance from any one point, and careful management of any flammable liquids or combustible materials kept on site.

The UK's Structural Timber Association first published "16 Steps to Fire Safety" in 2008.<sup>9</sup> This guidance note specifically addresses the prevention and suppression of fire on timber frame construction sites. The note was updated in 2014 to include all structural timber construction.<sup>10</sup>

The 16 steps were followed in 28 of the projects, of which 18 were undertaken since the publication of the more comprehensive guidance in 2014, demonstrating an increasing number following these essential guidelines each year.

Only one of the projects reported an on-site fire, the GSK Centre for Sustainable Chemistry (pg.158-159). In 2013, when the building was approximately two-thirds complete, a fire started with a faulty generator and caused substantial damage. There was no loss of life and the building was reconstructed almost exactly as per the previous design. The review that followed the event found no fault with the design team, the design or the mitigation measures installed.<sup>11</sup>

## OFF-SITE

In any urban site, consideration should be made to mitigate the risk of fire spread should it occur – the 'off-site' fire risk. The 2014 STA publication, 'Design guide to separating distances during construction' deals with this issue by providing minimum safe distances between exposed CLT surfaces on a construction site and adjacent buildings.<sup>12</sup> Where it is not possible to achieve these minimum distances, the guidance advises that fire protection to the external surfaces be included to reduce the potential for heat transfer.

In most cases where the site is in close proximity to other buildings a specialist consultant will be required to advise on necessary measures. Such measures might include temporary infilling of services penetrations, windows and door openings in party walls.

## INSURANCE

Insurance companies assess necessary risks and codify them. Key issues in using CLT center around fire safety and durability, particularly in regard to moisture.

CLT is a softwood product and is not intended to be permanently exposed to the elements. If sufficiently protected and well detailed there is no reason the material should deteriorate over time. The manufacturer KLH has obtained a Durability Report from the BRE (Building Research Establishment) for a 60-year lifespan,<sup>13</sup> but there is no reason CLT should not exceed this. In some countries durability concerns are addressed with chemical treatments; in Australia to address termite damage risk, and in France where Boron is used to mitigate against risk of rot resulting from long term leaks in bathrooms.

Treatment with chemicals can reduce the opportunity to reuse or recycle the timber at the end of life so it is generally considered preferable to address the cause through good detailing and correct installation as opposed to mitigating the result.

Insurance policies taken out by contractors and/or clients which cover risk of damage to the building during construction covers any number of risks and factors, however the most common query raised in relation to CLT structures relates to fire risk.

Periodic devastating conflagrations on timber frame construction sites lead to a predictable concern, however the risks on CLT sites are not the same as for timber frame. As more CLT buildings are completed, the knowledge and experience of how to mitigate fire in CLT construction has grown. Over recent years the UK guidance on fire risk during construction for timber framed structures has been extended and adapted to cover CLT. The UK Timber Frame Association and subsequently the STA have worked with fire engineers to produce guidance that covers all aspects of fire safety during construction. These are covered in more depth in the chapter on fire.

The majority of CLT building projects reported no issues with obtaining insurance during construction if the guidance was followed. Where space restrictions or other considerations prevented meeting the guidance, a specialist fire engineer would be commissioned to devise specific strategies.

A principal contractor, Jerram Falkus, (pg.192-193) reported both lengthy discussions with their insurers and a small premium for their first CLT project but indicated that for subsequent projects these dropped away once their insurers had greater knowledge of the product and had witnessed it under construction. The key being to work through the issues to address any concerns, with backup evidence provided by engineers and manufacturers.<sup>14</sup>

Another large contractor, Mace, (pgs.246-247, 250-251 & 278-279) reported a small insurance premium of £6,000 (equivalent to \$8,000) on the CLT element of their Highpoint scheme, plus some additional costs in instigating fire safety measures on site, such as addressing fire spread risk to neighboring buildings with fire rated scaffold sheeting. However, they chose CLT over concrete for this building due to its overall cost and time benefits.<sup>15</sup>

Lendlease, an international contractor and developer, reported no increase in insurance premiums for CLT projects, however additional fire safety measures were required during construction, for instance metal scaffold boards rather than timber were required to reduce fire load.<sup>16</sup>

## Endnotes

1 Ian Brooks, Kier Eastern, interview by R.Sawcer, 12 September 2017, Telephone.

2 The Concrete Centre, Cost and Program, 2017 <[http://www.concretecentre.com/Performance-Sustainability-\(1\)/Cost-Program.aspx](http://www.concretecentre.com/Performance-Sustainability-(1)/Cost-Program.aspx)> [accessed: 20 August 2017].

3 Questionnaire from Liam Dewar, Eurban, 15 September 2017.

4 Questionnaire from Kay Hartmann, KLH UK, 11 September 2017. Questionnaire from Gareth Mason, Stora Enso, 8 September 2017. Questionnaire from Liam Dewar, Eurban, 15 September 2017.

5 Questionnaire from Gareth Mason, Stora Enso, 8 September 2017.

6 Gavin White, Ramboll, interview by A.Thistleton & R.Sawcer, London, 8 September 2017, Waugh Thistleton Offices.

7 Questionnaire from Gareth Mason, Stora Enso, 8 September 2017.

8 Glenigan, Constructing Excellence, CITB and Department for Business, Energy & Industrial Strategy, UK Industry Performance Report, Based on the UK Construction Industry Key Performance Indicators, 2016 <[https://www.glenigan.com/sites/default/files/UK\\_Industry\\_Performance\\_Report\\_2016\\_LR.pdf](https://www.glenigan.com/sites/default/files/UK_Industry_Performance_Report_2016_LR.pdf)> [accessed 12 September 2017].

9 Structural Timber Association, *Fire during construction*, presentation, 2015 <<http://www.firefighterscompany.org/news/STA-2015.pdf>> [accessed 20 September 2017].

10 Structural Timber Association, *Detailed explanation of the '16 Steps to Fire Safety' strategy*, 2017 <<http://www.structuraltimber.co.uk/wms/do.php?module=core&action=user-login&target=L2dldC1kb3dubG9hZC81MTMx>> [accessed 20 September 2017].

11 Ike Ijeh, Carbon Neutral Laboratory: Out of the ashes, Building, 16 November 2016. <<https://www.building.co.uk/carbon-neutral-laboratory-out-of-the-ashes/5084942.article?adredir=1>> [accessed 27 July 2017].

12 Structural Timber Association, *Design guide to separating distances during construction*, 2015 <<http://www.structuraltimber.co.uk/wms/do.php?module=core&action=user-login&register=1&target=L2dldC1kb3dubG9hZC81MDYy>> [accessed 10 December 2017].

13 KLH UK, Frequently Asked Questions, 2017 <[http://www.klhuk.com/media/11553/frequently%20asked%20questions\\_05042011\\_1.pdf](http://www.klhuk.com/media/11553/frequently%20asked%20questions_05042011_1.pdf)> [accessed 10 July 2017].

14 Simon Birnie, Jerram Falkus, interview by T.Westwood & R.Sawcer, London, 22 September 2017, Waugh Thistleton Offices.

15 Guy Hunt et al., Mace, interview by T.Westwood, 26 September 2017, Telephone.

16 Richard Cook, Lendlease, interview by A.Waugh, T.Westwood & R.Sawcer, 29 September 2017, Telephone.



# POST COMPLETION

There is a perceived resistance from lenders and insurers to back CLT which can result in clients' reluctance to adopt the material. From the case studies in this book this perception is shown to be false.

The overwhelming feedback from visitors and users of completed CLT structures is highly positive in terms of aesthetic and comfort but also how warm and quiet people find the spaces.

At Woodberry Down, Berkeley Homes have reported fewer overheating events in the common parts, due to the lower thermal mass of the structure, and substantially less movement resulting in reduced cracking to the internal finishes.

A number of formal post-occupancy evaluation studies are now under way which should provide more empirical data to add to the anecdotal evidence.

## MORTGAGES & SALEABILITY

In the UK, there have been no reported issues in obtaining mortgages for homes constructed from CLT. This includes single family dwellings and mid-rise multi-home schemes.

Lenders will generally rely on the approval of the Council for Mortgage Lenders (CML) in order to provide mortgages for any particular construction type. The CML in turn wants to see that warranty providers are willing to provide warranties. Lendlease reported that this was their route to satisfying mortgage lenders on behalf of their purchasers; by obtaining approval from the NHBC.

At Murray Grove (pg.178-179), the developer was keen not to overstate the timber structure however the agents reported no reduction in value or desirability in the flats. Indeed, the flats retained their value through the housing downturn of 2009-2012. With more CLT structures being completed and more public knowledge of the material, the quality benefits are more widely appreciated, especially where some CLT is exposed. For many buyers the carbon credentials of the material are also seen as a positive.

## INSURANCE

As well as there being no reported issues with obtaining insurance cover during construction, there have been no problems with buildings insurance, which is taken out by the building owner and covers the completed property against damage or loss. Lendlease have reported no issues in insuring CLT buildings post completion, and there was no additional premium for insuring a CLT building over other construction types.

## BUILDING WARRANTIES

There is often a benefit to developers obtaining a third party, insurance-backed warranty for the completed building from a specialist insurer. These sit above specific product or installation warranties provided by manufacturers or subcontractors and any contractual warranty from consultants. Warranty providers' standards are extensive and rigorous with reviews of construction details and strategies through the design stages and regular inspections through construction. These largely follow building control guidance, but individual insurers can have specific areas of interest where their requirements exceed the Building Regulations.

Sectors tend to operate differently. New build housing is often sold with a 10 year warranty. The National House Building Council (NHBC) were the first to offer this, and there are now other providers in the UK market. These warranty providers have technical teams with construction industry experience who can engage with the consultants at design stages and help agree solutions that meet their criteria. In this sense CLT is treated no differently to any other 'non-standard' construction technology.

NHBC provided a warranty for Murray Grove in 2008; (pg.178-179), their first pilot residential scheme constructed entirely from CLT panels above first floor slab. Whilst they advised that subsequent schemes would still be assessed by them on a case-by-case basis, the details developed and the knowledge obtained has informed their response in subsequent CLT residential projects.

## **MAINTENANCE AND REPAIRS**

Where CLT has been damaged, for example by fire or water penetration, repair is possible, either by replacement of the damaged timber or reinforcement of the affected area.

In the first instance, where any damage is encountered, a structural appraisal should be carried out to establish whether urgent action is required to restore stability. Repairs to damaged elements can often be performed by cutting out the effected area and scarfing or splicing in new material. Where the damage is close to a junction, it may be necessary to reinforce the area with steel brackets to ensure robustness.

In cases of severe damage, whole panels may need replacing. In these cases, the surrounding structure should be propped, the panel cut out and a new panel or panels fixed in place.

### **FIRE**

In many CLT structures, the timber provides part of the fire resistance so there is a degree of structural redundancy. In the case of a minor fire, where charring has occurred, it is therefore likely that the load-bearing section of the element is still intact.

In this case it would usually not be necessary to reinforce the structure, however, the fire protection should be restored, either by replacement of the effected timber or by addition of a fire resistant lining. Where larger fires have occurred and one or more structural elements have been severely damaged, it may be possible to remove and replace the entire element.

## **WATER**

Long term exposure to high levels of moisture can lead to decay of the timber. Even small amounts of moisture, if allowed to penetrate the timber, can cause deterioration if not allowed to evaporate away, which is why it is essential to ensure the timber is dry before roof membranes are laid.

Where water damage is discovered, it is essential to ensure that all effected areas are identified as water can traverse CLT structures and build up in areas some distance from the original source.

Where long term damage has occurred, testing core samples to ensure structural integrity may be a less expensive solution than replacing entire panels.

Once structural integrity has been ensured, all areas should be allowed to dry out before the damage is cut away and replaced through gluing, screwing or nailing additional timber. An engineer will be required to ensure structural integrity.

If the water penetration is a result of an inherent vulnerability, such as in a roof gully, chemically protecting the repaired timber should be considered.

## **MONITORING AND EVALUATION**

Incorporating monitors within the fabric of a CLT building can be useful to measure movement of the structure or moisture levels which can give early warnings of any failures and mitigate issues such as leaks. Moreover, data collected from monitoring devices can help improve our ability to accurately design for key factors such as thermal and acoustic performance, through expanding our as-built database for CLT. Relying on monitors, which tend to be buried behind finishes and therefore not easily maintained, can be a risk if this is the only measure to ensure performance.

Several of the case studies reported a desire to incorporate some form of monitoring however few were implemented.

Data from the select studies currently under way will help us to understand and assess the longer term behavior of CLT in a range of situations.

The Architecture Archive (pg.244-245) is currently undergoing environmental monitoring and, particularly as a pure/solid CLT build up should produce easily extrapolated data on this materials true dynamic performance.

Similarly, at Woodberry Down (pg.218-219), a monitoring program is currently being established for both the CLT case study scheme and an adjacent traditional new-build block, which will aim to generate useful comparative data for designers, covering a number of areas:

Energy Use - comparing the energy used per apartment between the two schemes.

Humidity - testing to what extent the natural hygroscopic performance of CLT regulates the internal humidity, especially in bathrooms. Also to measure whether moisture builds up in the structure or is able to migrate to outside air.

Vibration - measuring the building's deflection at roof level to compare with the design assumptions. Also monitoring vibration at slab level from live loads.

Thermal Performance - taking measurements to monitor the comfort levels within different units and through comparison with the adjacent concrete building, to determine to what extent the timber affects these comfort indicators.

Resident Satisfaction - while there are number of reports of high levels of resident satisfaction in CLT buildings, a formal feedback process will be helpful to benchmarks these..



# CASE STUDIES

The following section contains the 100 case study projects, categorized into four broad sectors: Residential, Education, Commercial and Public & Civic.

The 100 case studies comprise:

- 32 Education buildings
- 32 Residential buildings (13 of which are Private)
- 15 Commercial buildings
- 21 Public & Civic buildings

The uneven spread across the sectors is indicative of the tendency to use CLT for certain applications with the vast majority built to date being residential and education buildings.

The embodied carbon figures listed for each project indicate the net carbon saved within the timber superstructure only. This considers both the carbon sequestered in the timber (expressed as negative emissions) and the carbon produced in the manufacture and delivery of the panels. It is important to note that in a full embodied carbon calculation this aspect of the building would only form part of the overall carbon cost of the construction, evaluated alongside the foundations, other structural materials within hybrid schemes, finishes and cladding, however to indicate the significance of the timber itself we have focused on this aspect alone.

The above ground structures have been categorized as 'Pure CLT' (CLT alone), 'Pure Timber' (CLT combined with other timber elements such as glulam), or 'Hybrid' (CLT combined with other structural materials such as steel or concrete). These categories give an indication of the significance of the timber's carbon savings as in 'Hybrid' schemes the emissions from steel/concrete will also have an impact.

Some carbon savings quoted for engineered timber structures include the mitigated carbon that would have been emitted were the same scheme to have been built traditionally. Whilst this saving is very real and does affect overall carbon emissions from the industry it was not possible to confidently quote this for all schemes without complex structural analysis.

Image: Curtain Place, Waugh Thistleton Architects © Ben Clarkson

# CONTENTS

## EDUCATION

Archway Early Years Centre	105
Kingsdale School, Music and Sports	107
Cranleigh School	109
City of London Academy Islington	111
West Buckland School	113
The Open Academy	115
Tring Park School for performing arts	117
Lauriston Primary School	119
Sandal Magna School	121
Holy Trinity Primary School	123
Passmores Academy	125
Waingels College	127
Hereford College of Arts Hub	129
Hayes Primary School	131
Hilden Grange Prepatory School	133
The Lee Centre	135
Ickburgh School	137
Arcadia Nursery	139
William Perkin Church of England School	141
ARK Brunel Primary Academy	143
Alfriston School Swimming Pool	145
Mayfield School	147
Mossbourne Victoria Park Academy	149
Graveney Sixth Form	151
Essex University Business School	153

Davenies Boys Prepatory School	155
--------------------------------	-----

Wynch Cottage	157
---------------	-----

GSK Centre for Sustainable Chemistry	159
--------------------------------------	-----

Alconbury Weald Primary School	161
--------------------------------	-----

Oculus Teaching Building	163
--------------------------	-----

SGS Berkeley Green	165
--------------------	-----

Ely Boathouse	167
---------------	-----

## RESIDENTIAL

Carlisle Lane	171
Fairmule House	173
Sunken House / Ed's Shed	175
Cavendish Avenue	177
Stadthaus/Murray Grove	179
Hunsett Mill	181
Russell Street	183
Strange House	185
Watson House	187
Dune House	189
Bridport House	191
Whitmore Road	193
Woodblock House	195
Sussex House	197
Mazarin House	199
Nurses Cottage	201
Kingsgate House	203
Wenlock Cross	205

Barretts Grove	207	<b>P U B L I C &amp; C I V I C</b>	267
142 Bermondsey Street	209	MK40 Tower	269
Trafalgar Place	211	Lumen Reform Church	271
Cobalt Place	213	The Garden Museum	273
St Clare's College	215	John Hope Gateway	275
Lansdowne Drive Passivhaus	217	The Termite Pavilion	277
Woodberry Down	219	Royal Shakespeare Theatre	279
Hurdle House	221	Dyson Centre for Neonatal Care	281
Cowan Court	223	Tower of Love	283
UEA Blackdale	225	The Hive	285
Bacton Low Rise (Phase 1)	227	Victoria Leisure Centre	287
Dalston Works	229	Regents Park Open Air Theatre	289
Carmarthen House	231	Youth Leisure Zone	291
Pitfield Street	233	Ditchling Musuem of Art and Craft	293
<b>C O M M E R C I A L</b>			
The Office	235	Olympic Park Timber Lodge	295
Bedfont Lakes Pavilion	237	Glowing Orchard	297
Woodland Trust Headquarters	239	Maggie's Centre	299
Alex Monroe Studio	241	Frampton Park Baptist Church	301
Architecture Archive	243	Chatham Command of the Oceans	303
Sky Believe in Better Building	245	Visitor Centre, Hastings Pier	305
Crosslam Workshops	247	Belarusian Memorial Chapel	307
Sky Health and Fitness Centre	249	The Gateway Buildings	309
Curtain Place	251	<b>T I M E L I N E</b>	310
Christies Care Office Building	253		
De Beauvoir	255		
Lower James Street	257		
Vitsoe Headquarters	259		
Wildernesse Restaurant	261		
National Automotive Innovation Centre	263		
	265		




# EDUCATION

Education has remained one of the most popular sectors for CLT structural solutions, with some of the first CLT buildings in the UK being schools. Most school refurbishments, extensions and expansions require that schools remain open during the construction. Such building projects require minimal distractions and maximum safety, and tend to need to be completed within an academic year. The primary benefits of a reduced construction program and a cleaner, safer, quieter site offered by CLT can therefore provide the ideal solution.

Education buildings are typically low rise and include a mix of large open span spaces for assembly areas, halls and auditoriums alongside smaller cellular classrooms. This combination tends to result in the use of hybrid structures, where pure CLT is used for the classrooms and glulam or steel additions are only necessary for the wide span spaces.

In addition to these practical benefits, research has shown that exposed timber interiors have a calming effect on children which promotes better learning. Additionally, exposing the structure allows its use as an educational tool helping the children to learn about construction within their curriculum. Exposing the timber in educational buildings is generally quite straightforward due to the pre-existing requirement for a thorough fire safety strategy that ensures very quick and easy evacuation from these typically low-rise buildings. CLT continues to be widely used in education buildings and is increasingly popular with councils and the Education Funding Agency who continue to champion the use of CLT in construction.

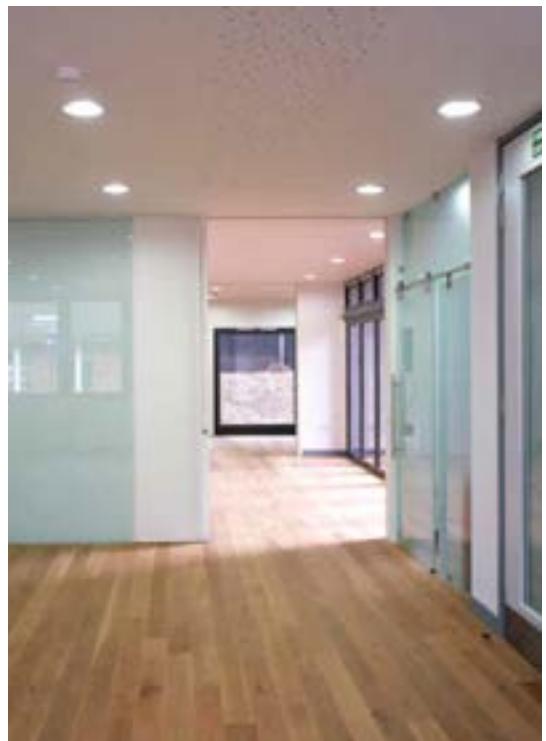

© Edmund Summner

2006 Education  
**ARCHWAY EARLY YEARS CENTRE**  
Islington Council

**LOCATION**  
London Borough of Islington

**HEIGHT / STOREYS**  
21 ft (6.4 m) / 2 storeys

**CONSTRUCTION COST**  
£1 million

**ARCHITECT**  
Kay Hartmann Architects

**STRUCTURAL ENGINEER**  
Fluid Structures

**TIMBER ENGINEER**  
KLH UK / Techniker

**TIMBER CONTRACTOR**  
KLH UK

**TIMBER MANUFACTURER**  
KLH Massivholz

**MAIN CONTRACTOR**  
Durkan Pudelek

**TIMBER VOLUME**  
4,600 ft<sup>3</sup> (132 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
2 weeks

**OVERALL CONSTRUCTION**  
46 weeks

**STRUCTURE TYPE**  
Pure CLT

**EMBODIED CARBON  
WITHIN TIMBER\***  
-80 tons (-72 tonnes) CO<sub>2</sub>e


**CLT FACT**  
Made financially viable by reducing costly foundations


The objective was to create a welcoming and stimulating creative environment to provide childcare and education for babies and children from 6 months to 5 years, alongside a wide range of health and family support services.

The new building is made up of a differentiated and interconnected series of spaces of varying heights and widths, which complement the surroundings and maintain the scale of the existing facilities. Spaces were designed to accommodate specific functions resulting in differing widths and sizes. The 'public' functions such as kindergarten and parent's areas are housed on the ground floor with the upper storey providing a home for the support services.

CLT presented itself as the most logical solution to building on this tight inner London site. The aim was to complete the superstructure as quickly as possible, limiting the number of site deliveries to reduce the impact on both the adjacent nursery, that had to be kept open during the construction period, and bus depot.

One of the first CLT buildings in the UK, this scheme set a precedent and encouraged the uptake of CLT.

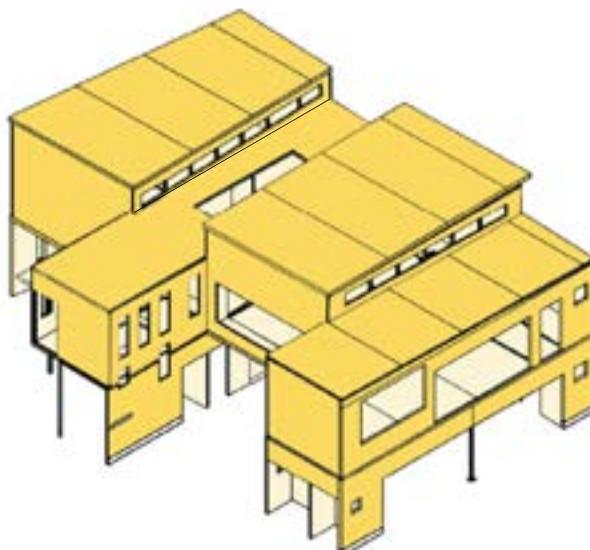

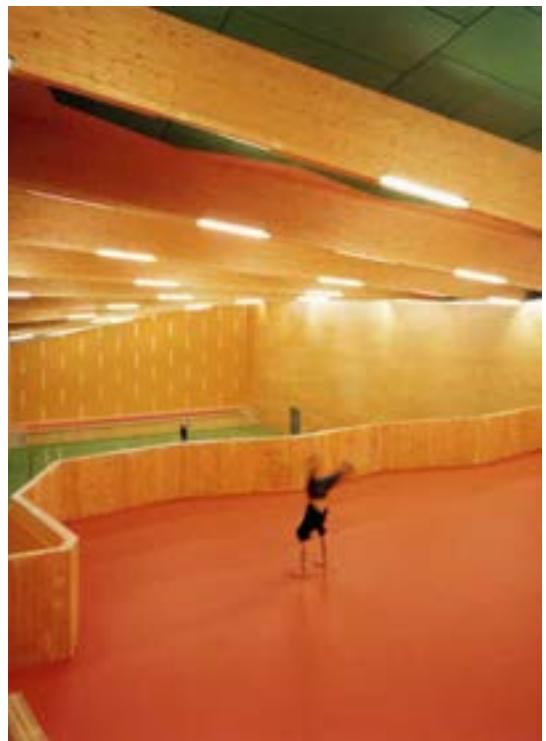

© Alex de Rijke / dRMM

2007 Education

## KINGSDALE SCHOOL, MUSIC AND SPORTS

Southwark Council

**LOCATION**

London Borough of Southwark

**HEIGHT / STOREYS**

49 ft (15 m) / 2 storeys

**CONSTRUCTION COST**

£3.4 million

**ARCHITECT**

dRMM

**STRUCTURAL ENGINEER**

Michael Hadi Associates

**TIMBER ENGINEER**

Michael Hadi Associates / KLH UK

**TIMBER CONTRACTOR**

KLH UK

**TIMBER MANUFACTURER**

KLH Massivholz

**MAIN CONTRACTOR**

Galliford Try

**TIMBER VOLUME**

29,900 ft<sup>3</sup> (848 m<sup>3</sup>)

**TIMBER ASSEMBLY**

4 weeks

**OVERALL CONSTRUCTION**

52 weeks

**STRUCTURE TYPE**

Pure Timber

**EMBODIED CARBON WITHIN TIMBER\***

-521 tons (-472 tonnes) CO<sub>2</sub>


**CLT FACT**


The first publicly funded CLT building in the UK

Sports halls are essentially very large, high spatial volumes of space, defined by pitch layouts. They tend to have blank internal walls that offer re-bound surfaces. Addressing the design challenge of turning a generic low-budget box into daylit and expressive architecture offering maximum flexibility for different user-groups, dRMM developed a hyperbolic parabolic roof from progressively rotated glulam beams infilled with thin CLT. Loadbearing CLT walls support the roof while daylight floods into the hall through high-level glazing. A freestanding CLT 'building within a building' provides changing rooms and storage space, while the dance space created on the mezzanine lends further flexibility.

In contrast, an angular form was required for the Music Block to manage acoustic reverberation. Full-height floor-to-roof CLT panels, mounted vertically, form the external walls and carry the CLT roof panels, which are reinforced with timber ribs. The outer walls are 'perforated' with free-form window apertures, with the cut out pieces used as furniture – thoughtful design minimizing wasted material.

In both spaces the CLT provides both structure and internal finish requiring only external insulation and profiled weatherproof cladding.

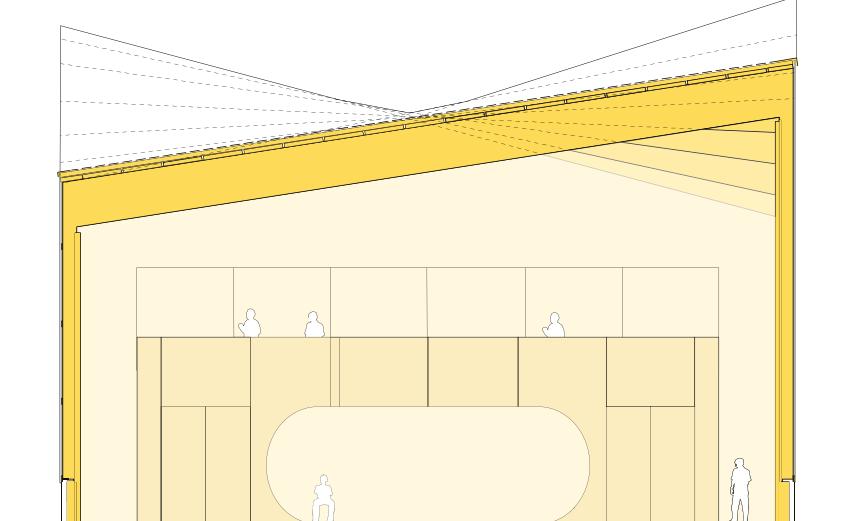

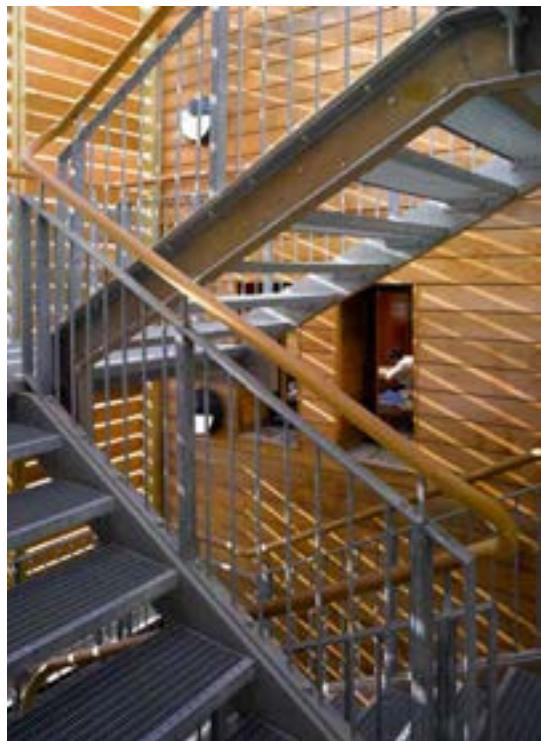

© Edmund Sumner

**LOCATION**  
Cranleigh, Surrey

**HEIGHT / STOREYS**  
49 ft (15 m) / 2 storeys

**CONSTRUCTION COST**  
£7 million

**ARCHITECT**  
Pringle Richards Sharratt

**STRUCTURAL ENGINEER**  
Thomasons

**TIMBER ENGINEER**  
KLH UK / Techniker /  
Thomasons

**TIMBER CONTRACTOR**  
KLH UK

**TIMBER MANUFACTURER**  
KLH Massivholz

**MAIN CONTRACTOR**  
R Durtnell & Sons

**TIMBER VOLUME**  
9,900 ft<sup>3</sup> (279 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
5.5 weeks

**OVERALL CONSTRUCTION**  
78 weeks

**STRUCTURE TYPE**  
Hybrid

**EMBODIED CARBON  
WITHIN TIMBER\***  
-168 tons (-152 tonnes) CO<sub>2</sub>e

**CLT FACT**  
Quicker achievement of  
weather tightness


This first phase of the redevelopment masterplan of Cranleigh School comprises almost 40,000ft<sup>2</sup> of science laboratories, classrooms and a lecture theatre.


The building is organized around a covered central court, which functions as the heart of the building. The larger science laboratories are accommodated at ground level with additional science spaces, classrooms and lecture theatre on the upper level.

The ground floor science laboratories define the structural grid and are built as large permanent spaces. At first floor, lightweight acoustic partitions and a raised access floor allow flexibility for future arrangements.

Classically pitched roofs, covered in patinated standing seam zinc, sit comfortably with the surrounding 19th century school buildings and the countryside beyond. Glazing along the apex of the pitched roof floods the hall with natural light. On the exterior, a variety of hand-made English bond brickwork and cedar cladding create a texture that is simultaneously traditional and contemporary.

The walls and roofs were constructed from CLT. While the cost was found to be comparable to steel this approach resulted in a quicker build and earlier achievement of weather tightness. CLT proved to be an expedient, economic and environmentally friendly way to achieve the architectural concept.

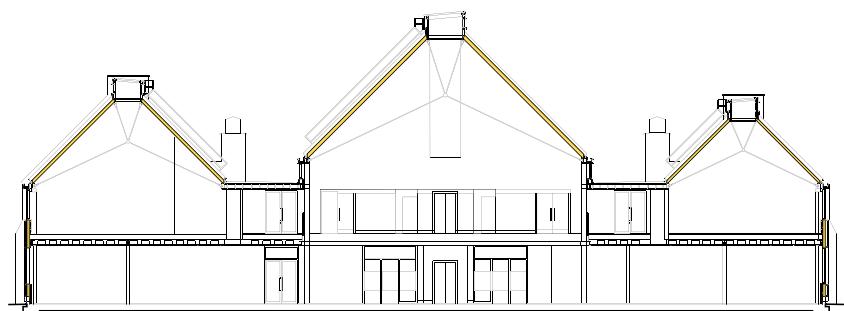

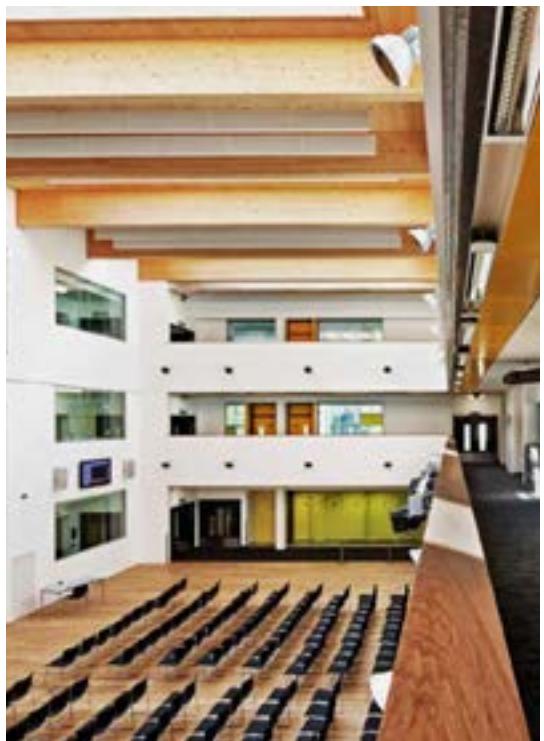

© Graham Ackroyd

**LOCATION**  
 London Borough of Islington

**HEIGHT / STOREYS**  
 39 ft (12 m) / 3 storeys

**CONSTRUCTION COST**  
 £28 million

**ARCHITECT**  
 Aukette Swanke

**STRUCTURAL ENGINEER**  
 BuroHappold Engineering

**TIMBER ENGINEER**  
 KLH UK

**TIMBER CONTRACTOR**  
 KLH UK

**TIMBER MANUFACTURER**  
 KLH Massivholz

**MAIN CONTRACTOR**  
 Galliford Try

**TIMBER VOLUME**  
 8,000 ft<sup>3</sup> (226 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 2 weeks

**OVERALL CONSTRUCTION**  
 122 weeks

This new school replaces Islington Green School, made famous by the Pink Floyd hit Another Brick in the Wall which was sung by pupils from the 1979 fourth form music class. Transforming this existing 1960s secondary school into a brand new facility for 850 pupils, the new building integrates a refurbished Victorian primary school for pupils with severe special needs encouraging shared social and learning experiences. The 87,000ft<sup>2</sup> building was delivered in phases to enable the school to remain operational during construction.


Responding sympathetically to the context and scale of the surrounding area the academy is organized around an internal atrium. This central adaptable multipurpose learning and assembly area can be opened to an adjacent drama hall and external courtyard. Roof lights provide the space with good quality natural lighting and ventilation.

Sustainable construction was a key consideration in material selection with off-site fabrication used to reduce waste and packaging. Protection of existing trees and the provision of green roofs, which also attenuate rainwater run-off, help achieve biodiversity targets while 20% renewable energy is generated through the use of photovoltaic cells and a wood-pellet biomass boiler.

**STRUCTURE TYPE**  
 Hybrid

**EMBODIED CARBON WITHIN TIMBER\***  
 -146 tons (-132 tonnes) CO<sub>2</sub>

**CLT FACT**  
 Using timber for phase 1 unlocked the site without delaying the program

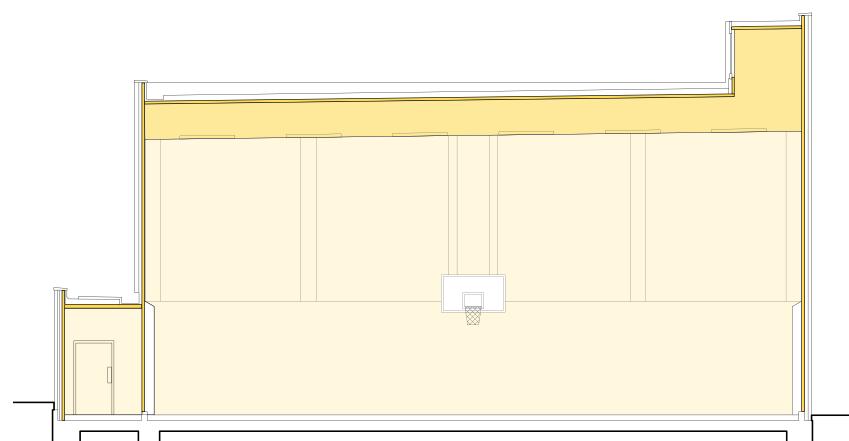

Section



© Paul McCarthy

2010 Education  
**WEST BUCKLAND SCHOOL**

West Buckland School

**LOCATION**  
Barnstaple, Devon

**HEIGHT / STOREYS**  
34 ft (10.4 m) / 2 storeys

**CONSTRUCTION COST**  
£3.25 million

**ARCHITECT**  
Rundell Associates

**STRUCTURAL ENGINEER**  
Atelier One

**TIMBER ENGINEER**  
Atelier One

**TIMBER CONTRACTOR**  
KLH UK

**TIMBER MANUFACTURER**  
KLH Massivholz

**MAIN CONTRACTOR**  
Pearce Construction

**TIMBER VOLUME**  
14,300 ft<sup>3</sup> (404 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
5 weeks

**OVERALL CONSTRUCTION**  
58 weeks

**STRUCTURE TYPE**  
Pure Timber

**EMBODIED CARBON  
WITHIN TIMBER\***  
-252 tons (-228 tonnes) CO<sub>2</sub>e

**CLT FACT**  
Excellent airtightness of  
3.18 m<sup>3</sup>(m<sup>2</sup>/h) @ 50 Pa


The new centre for Art and Design at the West Buckland School is an extension to the existing Victorian schoolhouse. From the outset it was envisaged that the new buildings would create a hub within the campus - visually, physically and socially linking the new and old buildings.

The building is comprised of two staggered blocks clad in larch and locally sourced stone. A number of covered and internal routes across the site reinforce the connection between the prep and upper school and a glazed bridge provides a gallery that can be viewed from outside whilst allowing for sweeping views across the Devon countryside from within.


Particular importance was given to natural lighting in the classrooms and studios, with skylights and full height windows flooding light into the interior.

Environmental credentials were a key driver in the design decisions. The entire structure, including lift shafts, is made of CLT panels and glulam beams. The large format panels reduced the number of construction joints and as such the potential for air leakage. The use of CLT also allowed for the development of simple façade details.

A heated wood pellet boiler and an array of photovoltaic cells work with a Building Management System to optimize the building's energy use keeping its operational energy demand impressively low.

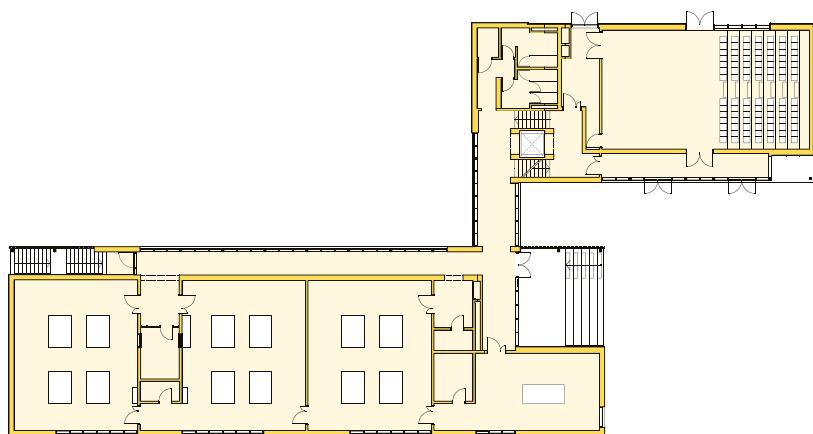

First Floor Plan

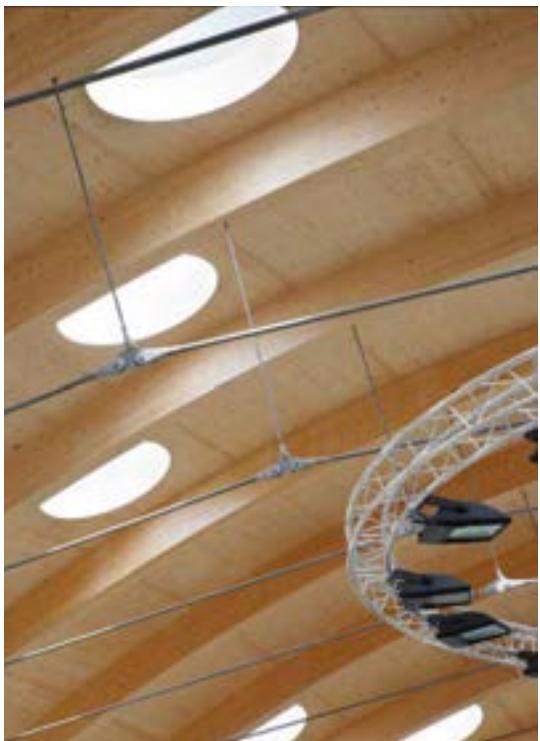

© Hufton + Crow

2010 Education

## THE OPEN ACADEMY

Norfolk Council / Diocese of Norwich / Open Trust

**LOCATION**  
Norwich, Norfolk

**HEIGHT / STOREYS**  
59 ft (18 m) / 3 storeys

**CONSTRUCTION COST**  
£17 million

**ARCHITECT**  
Sheppard Robson

**STRUCTURAL ENGINEER**  
Ramboll

**TIMBER ENGINEER**  
KLH UK

**TIMBER CONTRACTOR**  
KLH UK

**TIMBER MANUFACTURER**  
KLH Massivholz

**MAIN CONTRACTOR**  
Kier

**TIMBER VOLUME**  
123,600 ft<sup>3</sup> (3,500 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
18 weeks

**OVERALL CONSTRUCTION**  
65 weeks

**STRUCTURE TYPE**  
Hybrid


**EMBODIED CARBON  
WITHIN TIMBER\***  
-2,172 tons (-1,970 tonnes) CO<sub>2</sub>e

**CLT FACT**  
The main contractor  
estimated a 14-18 week  
time saving overall

The unique and innovative cyclical plan takes its inspiration from the aeronautical history of the site. The main building is a series of three concentric bands, which provides dual aspect to this new school. The outer band houses the main teaching accommodation; the second band provides the ancillary spaces such as store-rooms and offices, and the inner band is the main circulation route, stacked as a series of open balconies that wrap around the central forum: a multi-functional social and learning space that includes a lecture theatre. Extending horizontally from the rotunda structure is a rectangular sports hall.

The school is constructed predominantly from load-bearing CLT. The structural layout for the main building is an annular arrangement of loadbearing walls that offers considerable flexibility for planning the internal space. The 9 inch floor panels span 25 feet with uninterrupted soffits. Glulam downstand beams are used where spans exceed this. Where the perimeter walls step back, glulam beams transfer the upper storey loads into the wall.

Crowning the central forum is a gently curving roof formed from laminated timber panels that are supported by 12 canted glulam arches. Circular roof-lights punch through the timber soffit to animate the heart of the Academy. Interior and exterior finishes express and celebrate the extensive use of timber.

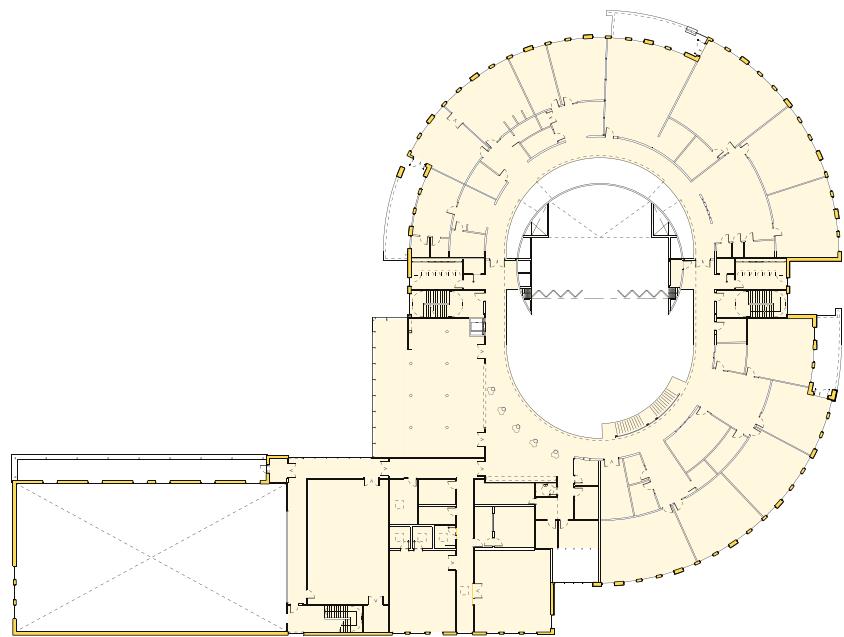

First Floor Plan



© Mark Foley / Burrell Foley Fischer



© Gentle Vision Photography



© Mark Foley / Burrell Foley Fischer

2010 Education

## TRING PARK SCHOOL FOR PERFORMING ARTS

Tring Park School for Performing Arts

**LOCATION**  
Tring, Hertfordshire

**HEIGHT / STOREYS**  
22 ft (6.6 m) / 1 storey

**CONSTRUCTION COST**  
£2.04 million

**ARCHITECT**  
Burrell Foley Fischer

**STRUCTURAL ENGINEER**  
Price & Myers

**TIMBER ENGINEER**  
Price & Myers

**TIMBER CONTRACTOR**  
Eurban

**TIMBER MANUFACTURER**  
Schilliger Holz

**MAIN CONTRACTOR**  
Ashe Construction

**TIMBER VOLUME**  
10,600 ft<sup>3</sup> (300 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
6.5 weeks

**OVERALL CONSTRUCTION**  
36 weeks

**STRUCTURE TYPE**  
Pure Timber


**EMBODIED CARBON  
WITHIN TIMBER\***  
-188 tons (-171 tonnes) CO<sub>2</sub>e

**CLT FACT**  
CLT chosen for warmth  
and moisture regulation  
essential for dance

Dance presents an extremely demanding set of environmental conditions in which to train, practice and present the art form effectively. Dancers are highly susceptible to cold and drafts, yet the moisture-laden atmosphere of a studio after an intensive class can be overwhelming. In response to these conditions, prefabricated, precision-engineered structural timber wall and roof panels were selected for the design of five new dance studios set within the grounds of a Grade II listed building.

Rooted in the site's natural setting the building takes a holistic approach to the environmental conditions related to dancers' specific needs. The internal heights of the dance studios reach 20 feet at their curved apex reducing to 13 feet towards the eaves. Externally, the eaves are kept intentionally low to reduce the profile of the building while the curved apex and wild flower meadow roof sensitively soften the building into the landscape.

The timber is exposed internally, painted with a white wash to provide a light internal surface that is warm to the touch. The building is naturally ventilated for a large proportion of the year through opening roof lights and perimeter ventilation, with low velocity mechanical ventilation used at other times.

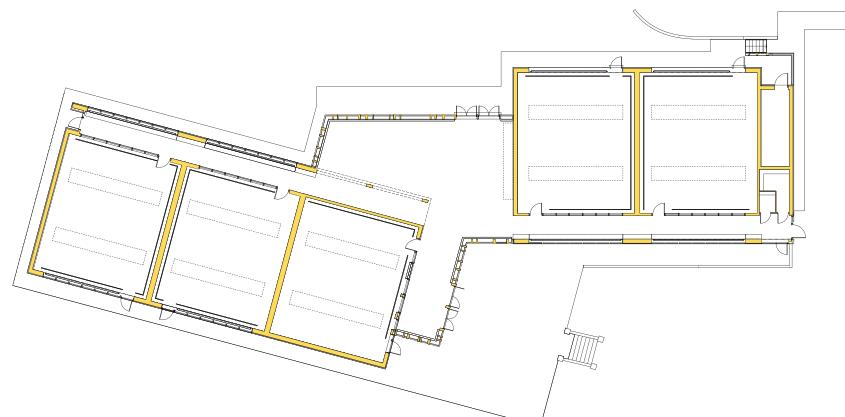

Ground Floor Plan



© David Grandorge



© Tim Soar



© Tim Soar

2010 Education

## LAURISTON PRIMARY SCHOOL

Hackney Council

**LOCATION**  
London Borough of  
Hackney

**HEIGHT / STOREYS**  
40 ft (12.2 m) / 3 storeys

**CONSTRUCTION COST**  
£8.3 million

**ARCHITECT**  
Meadowcroft Griffin  
Architects

**STRUCTURAL ENGINEER**  
Price & Myers

**TIMBER ENGINEER**  
KLH UK

**TIMBER CONTRACTOR**  
KLH UK

**TIMBER MANUFACTURER**  
KLH Massivholz

**MAIN CONTRACTOR**  
Neilcott Construction

**TIMBER VOLUME**  
23,000 ft<sup>3</sup> (651 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
14 weeks

### OVERALL CONSTRUCTION

Phase 1 - 45 weeks  
Phase 2 - 38 weeks

**STRUCTURE TYPE**  
Pure CLT

**EMBODIED CARBON  
WITHIN TIMBER\***  
-388 tons (-352 tonnes) CO<sub>2</sub>


**CLT FACT**  
Using CLT allowed the  
school to remain open  
during the construction

The objective of the project was to increase the capacity of an existing primary school while enabling the school to remain open. A multi-storey building with a large undercroft was designed, which increased both the internal area of the school and the amount of external play space on the site. It also gave the school a covered external play area that it didn't previously have.

A phased design was essential to this project as the existing school had to remain in operation during construction. The largest, three-storey section of the plan was constructed first so as to accommodate the existing school in addition to the classes of the incoming year. The second phase was then constructed in place of the original school building after its demolition.

Disruption to the school was minimized through the extensive use of prefabricated elements that reduced both the overall site period and the noise and dust created during construction. CLT was the obvious structural solution as panels are quick to assemble and is a relatively quiet construction process.

The CLT is left exposed providing an internal environment that offers visual warmth and texture.

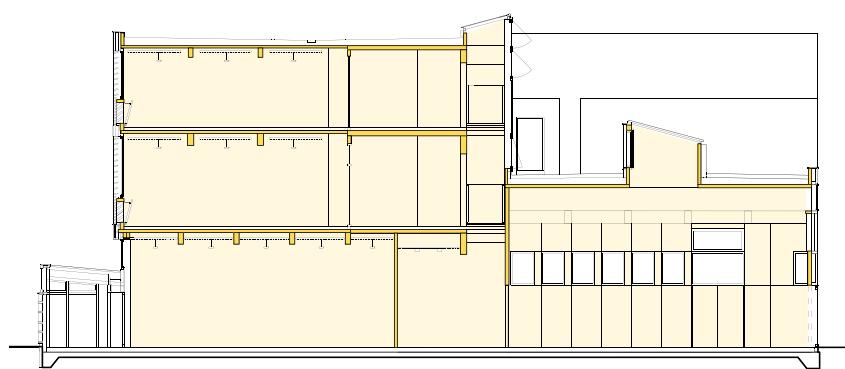

Section



© Mark Hadden

2010 Education  
**SANDAL MAGNA SCHOOL**  
Wakefield Council

**LOCATION**  
Wakefield, West Yorkshire

**HEIGHT / STOREYS**  
13 - 38 ft (4 - 11.7 m) / 1 storey

**CONSTRUCTION COST**  
£5.8 million

**ARCHITECT**  
Sarah Wigglesworth Architects

**STRUCTURAL ENGINEER**  
Techniker

**TIMBER ENGINEER**  
KLH UK

**TIMBER CONTRACTOR**  
KLH UK

**TIMBER MANUFACTURER**  
KLH Massivholz

**MAIN CONTRACTOR**  
Allenbuild

**TIMBER VOLUME**  
12,100 ft<sup>3</sup> (343 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
8 weeks

**OVERALL CONSTRUCTION**  
80 weeks

**STRUCTURE TYPE**  
Hybrid


**EMBODIED CARBON  
WITHIN TIMBER\***  
-209 tons (-190 tonnes) CO<sub>2</sub>e

**CLT FACT**  
CLT hybrid with load bearing masonry for thermal mass

Replacing an existing school deemed no longer fit for purpose, the design takes its cue from its immediate context, and is laid out as three parallel single storey wings that reference the neighboring terraced frontages and irregular back streets. A red brick is used extensively across the façade to emulate the local vernacular, and ventilation stacks above the teaching block echo the silhouette of the adjacent Victorian terraces. The school is crowned by a striking new bell tower that re-houses the original school bell and evokes the tall chimneys of Wakefield's industrial heritage.

A hybrid solution of CLT and load-bearing masonry was developed for the project with locally sourced bricks used for thermal mass. Exposed CLT with surface mounted services reflect the client's desire to reveal the mechanics of the building for educational purposes, making the building a demonstrative tool to form part of the curriculum for learning about sustainable construction and functionality. CLT compared favourably on price and improved the speed of construction. Chosen for its low embodied carbon, exposed CLT creates a sense of wellbeing within the interior.

The new building accommodates 210 pupils aged between 5-11 years alongside kindergarten provision for 26 children. The school also contains a community room for use by parents for adult education and other activities. It has been designed to permit expansion in the future to a 315 place school.

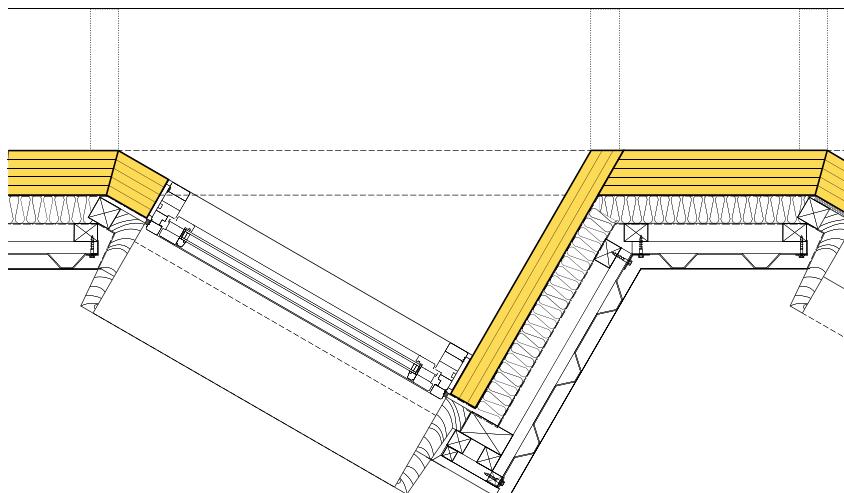

Library Window Detail



© Leigh Simpson Photography

**LOCATION**  
London Borough of  
Richmond upon Thames

**HEIGHT / STOREYS**  
18 ft (5.5 m) / 1 storey

**CONSTRUCTION COST**  
£4.7 million

**ARCHITECT**  
Architype

**STRUCTURAL ENGINEER**  
Techniker

**TIMBER ENGINEER**  
Techniker

**TIMBER CONTRACTOR**  
B & K Structures

**TIMBER MANUFACTURER**  
Binderholz

**MAIN CONTRACTOR**  
Apollo Group

**TIMBER VOLUME**  
33,200 ft<sup>3</sup> (940 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
12 weeks

**OVERALL CONSTRUCTION**  
60 weeks

**STRUCTURE TYPE**  
Pure Timber

**EMBODIED CARBON  
WITHIN TIMBER\***  
-585 tons (-531 tonnes) CO<sub>2</sub>


**CLT FACT**  
CLT chosen for green  
eco wings due to  
sustainability credentials

The brief was to expand and refurbish an existing 1970s primary school to increase its capacity from 210 to 420 pupils. With the school's ethos very much at the centre of the design, consultation with the school children provided invaluable insights.

Four new 'green' wings provide 11 classrooms, 2 shared resource areas, a new staff block, and additional circulation space. A new entrance leads through to a suite of classrooms and group spaces that open out into the landscape. The new wings connect lightly to the refurbished existing structure to maximize future flexibility, and create a signature visual form for the new school. Circulation has been rationalized and the hall is now the central 'heart' of the school around which a lively circulation space branches off into learning and social spaces.

The environmental agenda of the school is manifested in the new, highly energy efficient buildings which were built with CLT. A green roof system helps to acoustically insulate the building from high levels of aircraft noise and a natural, expressive material palette gives the school a warm, rich, tactile and neutral environment.

Occupied throughout the whole process, a careful solution removed the need for temporary accommodation and reduced disruption.

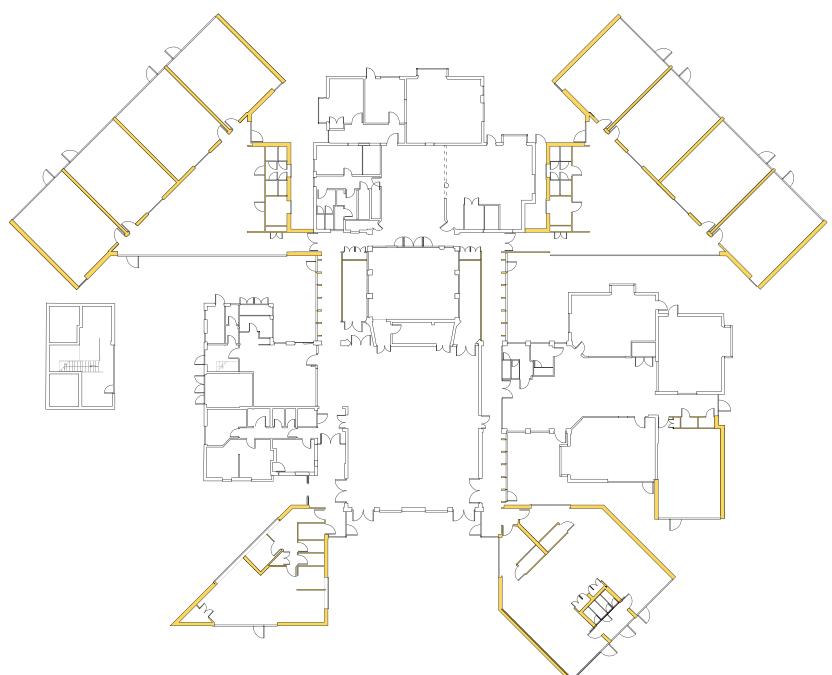

Ground Floor Plan



© Tim Crocker

2011 Education  
**PASSMORES ACADEMY**  
Essex County Council

**LOCATION**  
Harlow, Essex

**HEIGHT / STOREYS**  
29 ft (8.7 m) / 1 storey

**CONSTRUCTION COST**  
£22 million

**ARCHITECT**  
Jestico + Whiles

**STRUCTURAL ENGINEER**  
AECOM

**TIMBER ENGINEER**  
AECOM / Eurban

**TIMBER CONTRACTOR**  
Eurban

**TIMBER MANUFACTURER**  
Stora Enso

**MAIN CONTRACTOR**  
Willmott Dixon

**TIMBER VOLUME**  
3,900 ft<sup>3</sup> (110 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
3 weeks

**OVERALL CONSTRUCTION**  
74 weeks

**STRUCTURE TYPE**  
Hybrid

**EMBODIED CARBON  
WITHIN TIMBER\***  
-67 tons (-61 tonnes) CO<sub>2</sub>e

**CLT FACT**  
Successful use of CLT  
alongside concrete frame  
and steel frame elements



Passmores Academy, completed in 2011 for Essex County Council, accommodates 1200 students in six learning areas. Formulated around a radial plan, it was built with a communal gathering area or 'heartspace' at its centre, which comprises the main assembly halls, from which the rest of the school and adjoining faculty wings radiate outwards.

The sports hall is constructed as a hybrid lean-to arrangement, with CLT used on the two external walls, and a reinforced concrete frame on the two sides adjoining the main structure. Internally, the hall is lined on four sides with plywood to give a consistent appearance, with the CLT exposed at soffit level. CLT was chosen for the sports hall due to its ability to create the volume required, its speed compared with alternative materials and its warm appearance. The successful use of CLT for this element of the scheme, its ease of design and assembly, directly influenced the architect's knowledge of CLT that they were then able to apply for an entire school structure a few years later.

The architect responded to the client's emphasis on sustainability through natural ventilation systems and biomass boilers for heating. The façade is predominantly clad in timber, incorporating a brown roof and nighttime cooling. Passmores was classed by the Essex Design Initiative as an 'Exemplar project'.



Ground Floor Plan

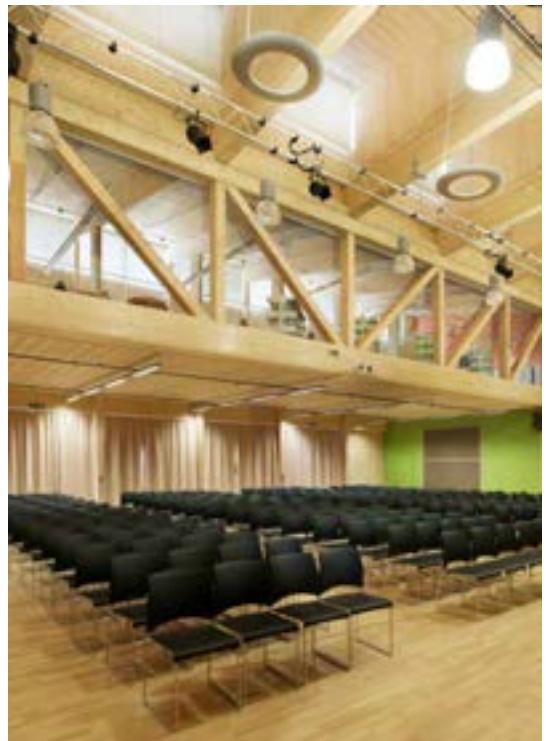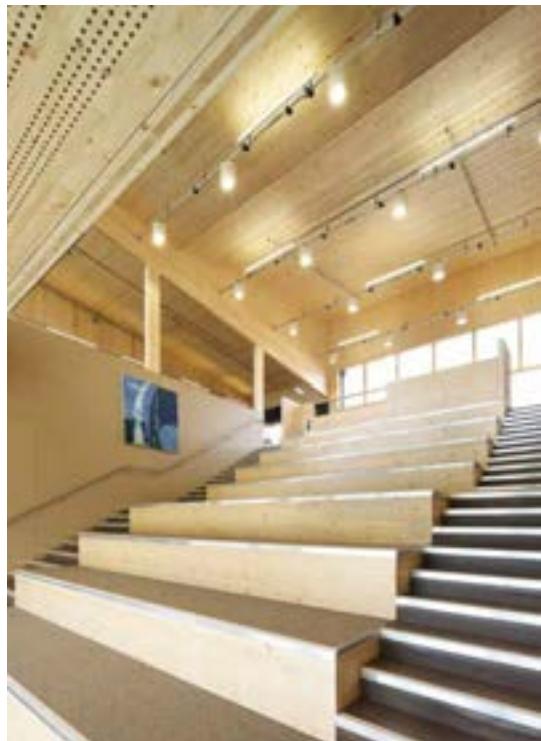

© Hufton + Crow

**LOCATION**  
Reading, Berkshire

**HEIGHT / STOREYS**  
32 ft (9.9 m) / 2 storeys

**CONSTRUCTION COST**  
£27 million

**ARCHITECT**  
Sheppard Robson

**STRUCTURAL ENGINEER**  
Ramboll / Eurban

**TIMBER ENGINEER**  
Eurban

**TIMBER CONTRACTOR**  
Eurban

**TIMBER MANUFACTURER**  
Schilliger Holz

**MAIN CONTRACTOR**  
Willmott Dixon

**TIMBER VOLUME**  
196,300 ft<sup>3</sup> (5,560 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
Blocks A,B & D - 26 weeks.  
C - 10 weeks

**OVERALL CONSTRUCTION**  
135 weeks

**STRUCTURE TYPE**  
Pure Timber

**EMBODIED CARBON  
WITHIN TIMBER\***  
-3,514 tons (-3,188 tonnes) CO<sub>2</sub>e

**CLT FACT**  
Construction 10ft from  
operational classrooms  
made possible

Driven by the concept of the school as a community and its buildings as a village of learning spaces, Waingels College comprises four separate buildings which frame a planted courtyard: a village green.

Three of the buildings are pastoral bases, while the fourth houses large, shared, communal spaces such as the assembly and dining halls.

Each of the teaching blocks contains flexible, open-plan spaces on the ground floor, with more formal, private classrooms on the upper storeys. Large central staircases double as seating to provide an intimate, central forum within each individual learning community. Avoiding long dark corridors, spaces are naturally lit with interconnected breakout areas encouraging cross-curricular interaction.

All four blocks are built using CLT and glulam. Ceilings, floors and walls are structural and the timber is exposed throughout to create a warm and inviting environment.

With no building permitted on the playing field the new buildings had to be multi-phased around the existing school. The tight nature of the site resulted in new buildings being constructed only 10ft away from operational classrooms. The use of timber meant that the panels could be lifted quickly, minimizing disruption in teaching areas.




Ground Floor Plan



© Lance McNulty



© Paul Younger

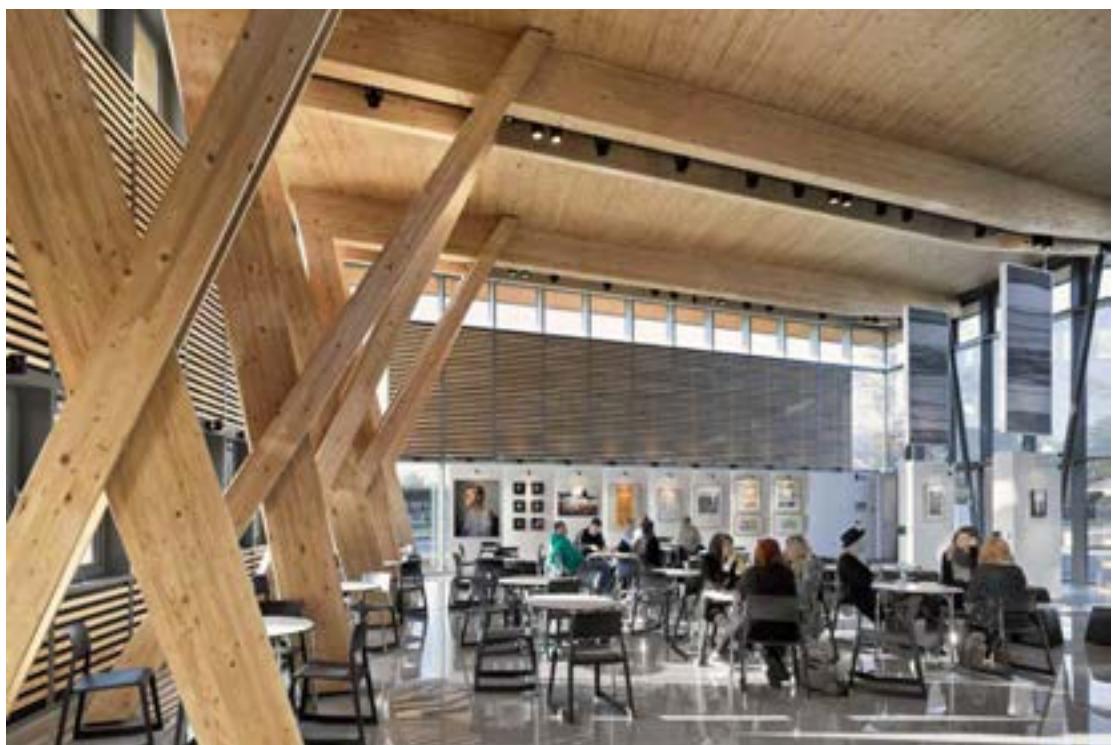

© Lance McNulty

2012

Education

## HEREFORD COLLEGE OF ARTS HUB

Hereford College of Arts Hub

**LOCATION**

Hereford, Herefordshire

**HEIGHT / STOREYS**

24 ft (7.2 m) / 1 storey

**CONSTRUCTION COST**

£920,000

**ARCHITECT**

Hewitt Studios

**STRUCTURAL ENGINEER**

Integral Engineering Design

**TIMBER ENGINEER**

Integral Engineering Design

**TIMBER CONTRACTOR**

Eurban

**TIMBER MANUFACTURER**

Schilliger Holz

**MAIN CONTRACTOR**

Kier

**TIMBER VOLUME**

3,900 ft<sup>3</sup> (110 m<sup>3</sup>)

**TIMBER ASSEMBLY**

1 week

**OVERALL CONSTRUCTION**

39 weeks

Conceived as timber from the outset the project provides café and exhibition space in which college staff and students can come together to display and celebrate their work.

Derived from the constraints of the site, the parallelogram 'wedge' of the main cafe/exhibition area responds to the geometry of Folly Lane, the double height volume matching the scale of the existing buildings.

The distinctive main volume is an elegant glass box protected from the weather by an oversailing roof. Solid elements within the façade shield from the low sun whilst also providing insulation. The 'twisted-trestle' structure is made from a combination of glulam beams/columns, CLT panels and slender steel props. Support to the entrance is as light as possible, allowing clear views of the building's interior, whilst substantial timbers on the opposite side firmly root the building to the ground.

The interior creates a calm, neutral, open plan space for the display of art. The majority of services within the main space have been concealed and the functionality of the building fabric has been enhanced e.g. the fritted solar shading doubles as a media projection screen, the timber-slatted wall panels provide both acoustic and thermal insulation while the rotating white-boards can be used for display, glare control and/or privacy.

**STRUCTURE TYPE**


Hybrid

**EMBODIED CARBON  
WITHIN TIMBER\***

-69 tons (-63 tonnes) CO<sub>2</sub>e

**CLT FACT**

CLT roof slab cantilevers up to 13 ft (4 m) from the primary support beams

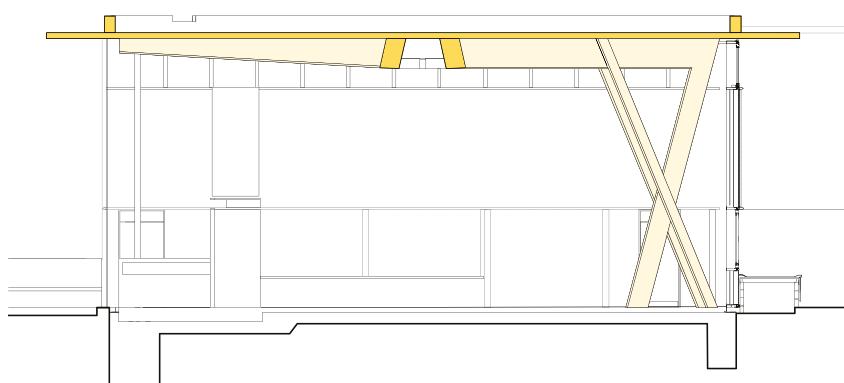

Section



© Kilian O'Sullivan

**LOCATION**  
Kenley, Surrey

**HEIGHT / STOREYS**  
20 ft (6 m) / 1 storey

**CONSTRUCTION COST**  
£2.7 million

**ARCHITECT**  
Hayhurst and Co.

**STRUCTURAL ENGINEER**  
Crofton Design

**TIMBER ENGINEER**  
Eurban

**TIMBER CONTRACTOR**  
Eurban

**TIMBER MANUFACTURER**  
Schilliger Holz / Stora Enso

**MAIN CONTRACTOR**  
Kier

**TIMBER VOLUME**  
5,300 ft<sup>3</sup> (150 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
3 weeks

**OVERALL CONSTRUCTION**  
60 weeks

Providing 105 additional pupil spaces, and comprising 4 new classrooms, ICT lab, hall, administration facilities and external play and learning spaces, the expansion of Hayes Primary School brings renewed energy to a tired and out-dated building which had grown in a piecemeal and incoherent fashion.

The new building sits in a semi-rural location behind a cluster of mature trees. The glazed elevation allows classrooms to look out onto the new landscaped grounds, while a large mirrored façade provides shade from the solar glare and reflects the canopies of the mature trees giving the illusion of a reduced mass.


The hybrid structure uses CLT for spine walls and pitched roofs with concrete block walls and glulam beams. Through timber exposed internally and externally the design reflects the woodland nature of the site.

One of the key features of the school is a 250 foot long, 25 inch deep wall made of horizontally stacked CLT panels. This wall is a key navigation point in the school which identifies the circulation route and delineates the infant teaching space. The solid timber pieces are cut and stacked to form openings in the wall, through to the classrooms, and has recesses on alternating sides that form shelves for the school library, seats and reading alcoves as well as storage for classroom equipment and teaching materials.

**STRUCTURE TYPE**  
Pure Timber

**EMBODIED CARBON WITHIN TIMBER\***  
-91 tons (-83 tonnes) CO<sub>2</sub>

**CLT FACT**  
The solid timber storage wall acts as a carbon sink

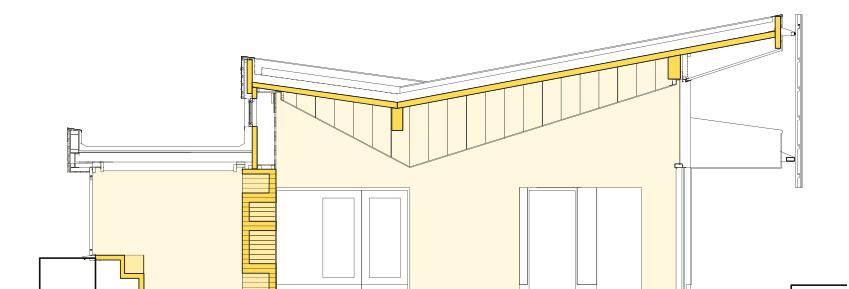

Section



© Tim Crocker

2012 Education

## HILDEN GRANGE PREPATORY SCHOOL

AlphaPlus

**LOCATION**  
Tonbridge, Kent

**HEIGHT / STOREYS**  
39 ft (12 m) / 3 storeys

**CONSTRUCTION COST**  
£4.5 million

**ARCHITECT**  
Hawkins\Brown

**STRUCTURAL ENGINEER**  
Price & Myers

**TIMBER ENGINEER**  
Engenuiti

**TIMBER CONTRACTOR**  
B & K Structures

**TIMBER MANUFACTURER**  
Binderholz

**MAIN CONTRACTOR**  
BAM Construction

**TIMBER VOLUME**  
19,200 ft<sup>3</sup> (543 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
8 weeks

**OVERALL CONSTRUCTION**  
58 weeks

**STRUCTURE TYPE**  
Pure Timber

**EMBODIED CARBON  
WITHIN TIMBER\***  
-333 tons (-302 tonnes) CO<sub>2</sub>e


**CLT FACT**  
Enabled cost effective  
construction of school  
within one year

The brief was to reinvigorate a tired school that was lacking in facilities. Hawkins Brown's design combines innovative and economical construction methods to design a new school on a steeply sloping site.

Terraced external play areas dominate the scheme, and are flanked on either side by two horizontally descending teaching blocks. These two wings are connected by a large assembly and dining hall, the roof of which functions as a further terrace, linking the upper levels. Sheltered, external walkways replace corridors to create a sense of community and engage the interior with the exterior. The new scheme restores views of the surrounding countryside, which had been obscured by the addition of temporary classrooms.

The new building's form was inspired by that of the main school, the pitched roof of the west wing recalling the original Victorian schoolhouse.

With the exception of the new assembly/dining hall, the new facilities are constructed of CLT. CLT was chosen to accelerate the program as the school had to be built within one academic year. In addition, the material choice minimized the building's carbon footprint. The structure is exposed internally, reducing the use of dry-lining and ceilings thereby creating calm spaces for learning. Exposed service runs encourage pupils at the school to understand the modern construction methods of the building.

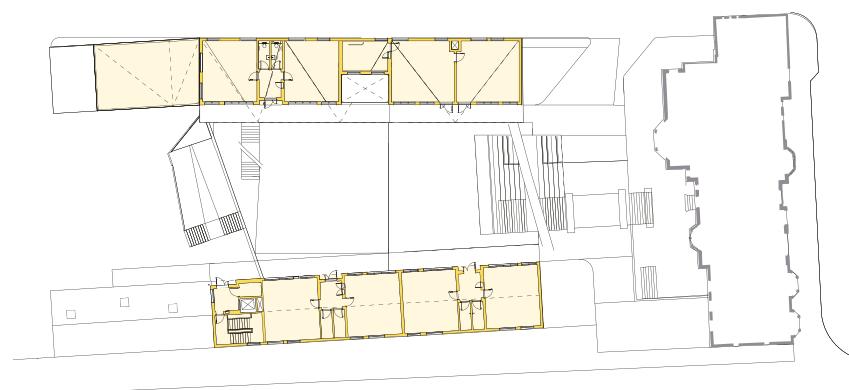

Upper Ground Floor Plan





© Chris Pendrich



© Chris Pendrich



© Henrietta Williams

**LOCATION**  
Bath, Somerset

**HEIGHT / STOREYS**  
30 ft (9 m) / 2 storeys

**CONSTRUCTION COST**  
£1.42 million

**ARCHITECT**  
Feilden Fowles Architects

**STRUCTURAL ENGINEER**  
Ramboll

**TIMBER ENGINEER**  
Eurban

**TIMBER CONTRACTOR**  
Eurban

**TIMBER MANUFACTURER**  
Stora Enso

**MAIN CONTRACTOR**  
H Mealing & Sons

**TIMBER VOLUME**  
7,300 ft<sup>3</sup> (208 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
4.5 weeks

**OVERALL CONSTRUCTION**  
48 weeks

The Lee Centre is the first major building within a broader masterplan for the Ralph Allen School campus. The two-storey Applied Learning Centre focuses on science, the foundation school's specialist subject.

The structure is comprised of four classrooms, arranged in adjoining pairs around a double height breakout space for independent learning. It is designed in the round, with teaching spaces leading out onto the learning landscape. The series of open, flexible spaces are designed to encourage a university style of independent learning over the traditional school model.

Located on greenfield land, adjacent to a world heritage site, the use of natural, low impact and environmentally responsible materials was essential. The project employs an earthy palette of materials, including polished concrete floors, rammed earth and timber designed to engage students and honestly express the structure.

Constructed in CLT, the building is partly embedded in the landscape, accessed by ramps leading up to the first floor gallery level. A hung larch façade marches across the elevations with a strong vertical rhythm, giving way to dark-stained timber at the lower level, used elsewhere to express deep cuts in the building envelope.

**STRUCTURE TYPE**  
Pure CLT

**EMBODIED CARBON  
WITHIN TIMBER\***  
-129 tons (-117.4 tonnes) CO<sub>2</sub>e

**CLT FACT**  
Construction was able to continue in spite of the snow



Section



© Daniel Shearing

2013

Education  
**ICKBURGH SCHOOL**  
Hackney Council

**LOCATION**  
London Borough of Hackney

**HEIGHT / STOREYS**  
41 ft (12.5 m) / 3 storeys

**CONSTRUCTION COST**  
£14 million

**ARCHITECT**  
Avanti Architects

**STRUCTURAL ENGINEER**  
Mouchel

**TIMBER ENGINEER**  
Eurban

**TIMBER CONTRACTOR**  
Eurban

**TIMBER MANUFACTURER**  
Stora Enso

**MAIN CONTRACTOR**  
McLaren Construction

**TIMBER VOLUME**  
52,500 ft<sup>3</sup> (1,488 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
10 weeks

**OVERALL CONSTRUCTION**  
52 weeks

**STRUCTURE TYPE**  
Pure CLT

**EMBODIED CARBON WITHIN TIMBER\***  
-928 tons (-842 tonnes) CO<sub>2</sub>e


**CLT FACT**  
Exposed CLT creates a calming environment for students

Ickburgh School provides specialist accommodation for 150 pupils aged between 2-19 years on the Profound and Multiple Learning Difficulties spectrum. The brief demanded a number of bespoke amenities, such as four large lifts at key access points, high acoustic insulation and large corridors to allow for ease of movement of pupils in wheelchairs.

The school is arranged in an L-Shape which minimizes overshadowing to the external spaces, and allows the majority of the classrooms to enjoy an outlook over the secluded garden. A visitor entrance on the corner of Kenworthy Road creates a strong civic presence while a triple-height, top-lit atrium space, with a café on the ground floor forms the social heart of the school.

Classrooms and support rooms are organized into five clusters for different age groups, each of which enjoys a front door accessed from a central lightwell cultivating a feeling of intimacy.

The use of a CLT structure provided program savings and a highly sustainable, low carbon building. Exposed CLT makes a substantial contribution to the internal architectural expression within the classrooms and shared spaces, creating a calming environment for the students and teachers.

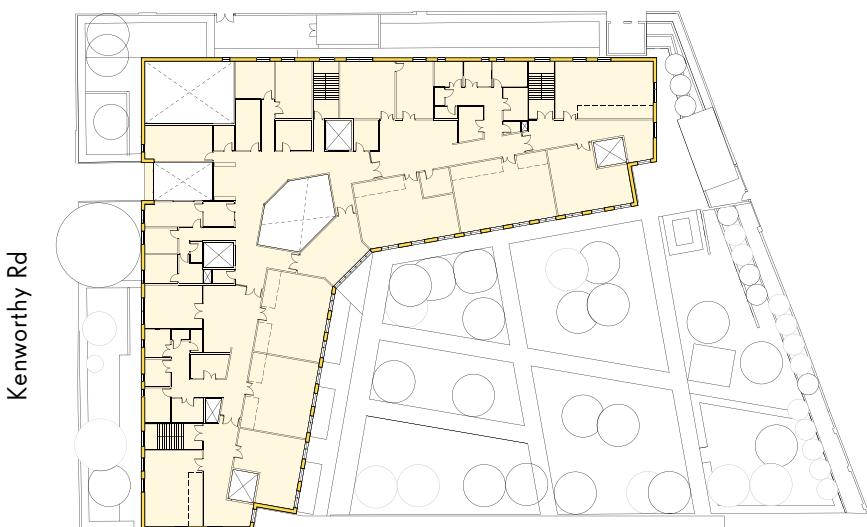



© Malcolm Fraser



© Angus Brenmer



© Angus Brenmer

2014

Education  
**ARCADIA NURSERY**  
University of Edinburgh

**LOCATION**  
Edinburgh, Lothian

**HEIGHT / STOREYS**  
30 ft (9 m) / 2 storeys

**CONSTRUCTION COST**  
£2.5 million

**ARCHITECT**  
Malcolm Fraser  
Architects

**STRUCTURAL ENGINEER**  
Applied Engineering  
Design (AED)

**TIMBER ENGINEER**  
Applied Engineering  
Design (AED) / Eurban

**TIMBER CONTRACTOR**  
Eurban

**TIMBER MANUFACTURER**  
Stora Enso

**MAIN CONTRACTOR**  
Balfour Beatty

**TIMBER VOLUME**  
10,200 ft<sup>3</sup> (290 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
6 weeks

**OVERALL CONSTRUCTION**  
48 weeks

**STRUCTURE TYPE**  
Pure Timber

**EMBODIED CARBON  
WITHIN TIMBER\***  
-173 tons (-157 tonnes) CO<sub>2</sub>e

**CLT FACT**  
Enabled complex roof  
forms without the need  
for columns


The Arcadia Nursery provides early-years education for up to 113 children of Edinburgh university staff, students and the general public, aged between six weeks to five years.

The building is designed around a 'free-play' concept that encourages age groups to mix in order to develop children's confidence, independence and creativity. Three playrooms for different age groups are connected via a flexible central space containing shared, creative, 'messy' play spaces accessed through large sliding doors.

The three zones of the building are defined by their trapezoidal pyramid roofs, each one distinguished by its size and shape. The babies room is a cosy, domestic height single storey, while the rooms for the elder children are taller with raised mezzanine spaces to provide variety in spatial experience. Each roof is constructed of cross-laminated timber panels, supported on a continuous glulam ring beam to contain thrust from the roof form.

CLT was found to be the ideal material for such expressive roof forms enabling a column free space beneath for the arrangement of rooms and play decks at different levels. Left exposed throughout, it also provides a warm, tactile interior.



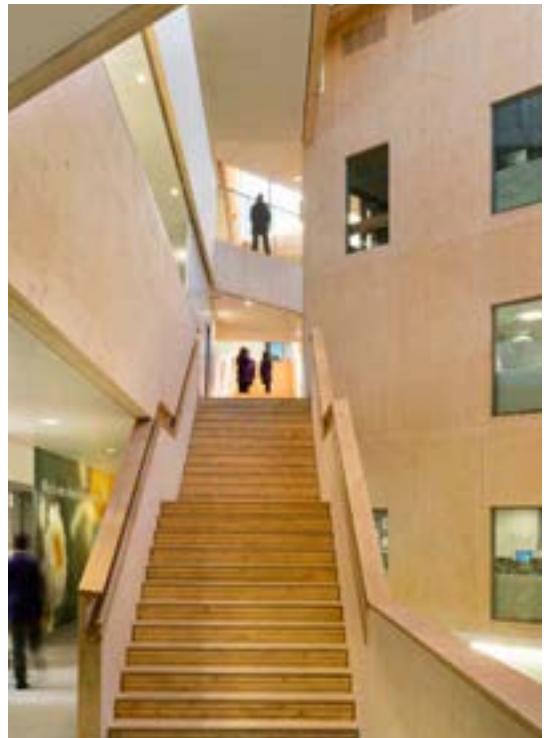

© Jim Stephenson

**LOCATION**  
London Borough of Ealing

**HEIGHT / STOREYS**  
64 ft (19.5 m) / 4 storeys

**CONSTRUCTION COST**  
£ 18 million

**ARCHITECT**  
Feilden Clegg Bradley Studios

**STRUCTURAL ENGINEER**  
AECOM

**TIMBER ENGINEER**  
Ramboll

**TIMBER CONTRACTOR**  
KLH UK

**TIMBER MANUFACTURER**  
KLH Massivholz

**MAIN CONTRACTOR**  
Kier

**TIMBER VOLUME**  
132,400 ft<sup>3</sup> (3,750 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
15 weeks

**OVERALL CONSTRUCTION**  
83 weeks

**STRUCTURE TYPE**  
Pure Timber

**EMBODIED CARBON  
WITHIN TIMBER\***  
-2,318 tons (-2,103 tonnes) CO<sub>2</sub>


**CLT FACT**  
A 12 month construction program necessitated the use of CLT

Driven by site constraints a simple yet elegant concept was conceived for this school. Required to have a footprint which was no greater than the redundant buildings that were demolished on the site and bounded on one side by an urban motorway, the new school is composed of two distinct parts. The rectangular 'bar' building, and the triangular 'apex' are connected by a street at ground floor and by an elegant running stair, which flows above it from ground to third floor.

Externally the building offers both a shield to the urban motorway and a welcoming presence to its community with a line of poplar trees, historically planted to shield the sports ground, and taken as a device to orientate the circulation route internally.


Inside the aim was to provide an open and airy space. The main four-storey triangular building is skirted by balconies looking onto a large library and a central performance studio.

The school was required to be open within 12 months of construction work starting which resulted in the choice of CLT for the superstructure. Used in conjunction with glulam beams to facilitate large-span spaces (sports hall and main hall) the interior is characterized by top lit spaces and exposed timber that brings warmth and lightness to the dramatic interior.

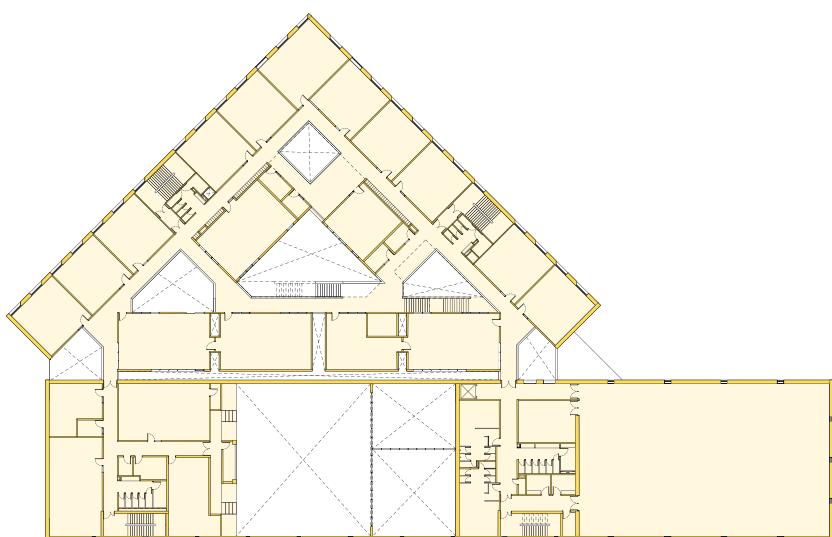

First Floor Plan



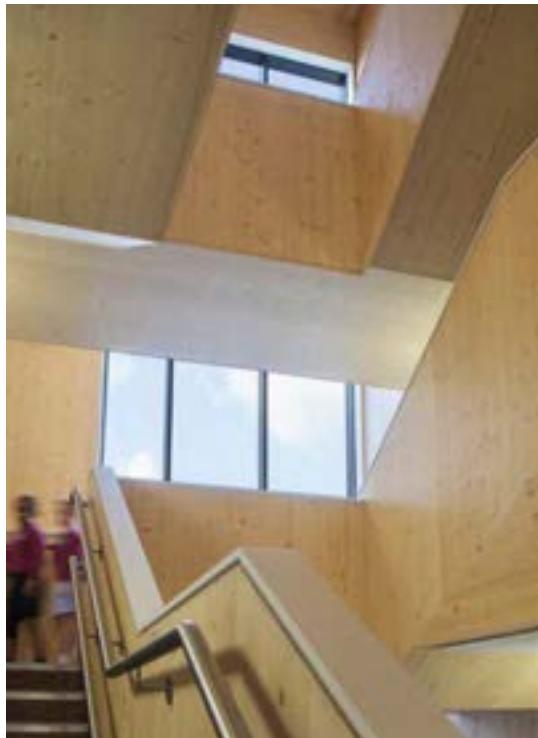

©Richard Brine



©Tim Crocker



©Tim Crocker

2014

## Education

### ARK BRUNEL PRIMARY ACADEMY

Kensington & Chelsea London Borough Council

**LOCATION**

Royal Borough of  
Kensington and Chelsea

**HEIGHT / STOREYS**

49 ft (15 m) / 3 storeys

**CONSTRUCTION COST**

£8 million

**ARCHITECT**

Penoyre & Prasad

**STRUCTURAL ENGINEER**

Price & Myers

**TIMBER ENGINEER**

Price & Myers

**TIMBER CONTRACTOR**

B & K Structures

**TIMBER MANUFACTURER**

Binderholz

**MAIN CONTRACTOR**

BAM Construction

**TIMBER VOLUME**

35,500 ft<sup>3</sup> (1,006 m<sup>3</sup>)

**TIMBER ASSEMBLY**

13 weeks

**OVERALL CONSTRUCTION**

60 weeks

**STRUCTURE TYPE**

Pure Timber

**EMBODIED CARBON  
WITHIN TIMBER\***

-617 tons (-560 tonnes) CO<sub>2</sub>e

**CLT FACT**

Designed to allow the  
future removal of certain  
panels for flexibility

Providing 420 primary school places, a 30 place kindergarten and a speech and language centre for 16 pupils, this new academy is part of a larger mixed use scheme on the site of the former Middle Row School.

The small footprint is maximized by flipping the conventional school building onto its side creating a three-storey form. Organized around staggered voids which create mini atria, the spatial organization provides inter-connectivity through the building's core and a sense of progression through the school – children growing up while moving up the building.

Around these mini atria, stacked 'learning clusters' comprise two pairs of classrooms and learning spaces. Corridors were designed out, bringing all shared spaces into active use.

CLT is used as both structural and surface finish material to provide an economic design that reduced time and disruption on site and provides a warm and textured internal environment. The CLT forms the load bearing timber walls, floors, beams and roof and is combined with glulam beams to support the large roof span of the double height space. Stability is achieved by the floor panels acting as horizontal diaphragms to transfer wind loads to the walls, while the walls act as shear walls transferring these loads back to the foundations.



Section



© Jack Hobhouse

**LOCATION**  
Beaconsfield,  
Buckinghamshire

**HEIGHT / STOREYS**  
20 ft (6 m) / 2.5 storeys

**CONSTRUCTION COST**  
£1.8 million

**ARCHITECT**  
Duggan Morris Architects

**STRUCTURAL ENGINEER**  
Elliot Wood

**TIMBER ENGINEER**  
Westmuckett Hawkes

**TIMBER CONTRACTOR**  
Cowley Timber & Partners

**TIMBER MANUFACTURER**  
Cowley Timber & Partners  
/ Dold / Lilleheden

**MAIN CONTRACTOR**  
Feltham Construction

**TIMBER VOLUME**  
2,100 ft<sup>3</sup> (60 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
5 weeks

**OVERALL CONSTRUCTION**  
65 weeks

**STRUCTURE TYPE**  
Hybrid

**EMBODIED CARBON  
WITHIN TIMBER\***  
-32 tons (-29 tonnes) CO<sub>2</sub>e


**CLT FACT**  
Sculptural CLT ceiling  
doubles as an acoustic  
baffle

This extension to a sports department within a special needs school provides a four lane pool, changing facilities, gym and fitness suites within a raised timber structure. Drawing on the geometry of the roof pitches of the rest of the school, it is designed as a timber hat articulated by three folded roof segments that open to the rear, inverting the pitch.



This expressive sculptural form, which is evocative of ripples within the pool, acts as an acoustic baffle preventing high reverberation of sound, one of the primary considerations of the brief.

The prefabricated roof structure was designed around the maximum size that could be delivered to site on a truck. Each of the 12 triangulated truss modules was manufactured off-site and delivered on a just-in-time basis complete with service routes, and pre-finished with waterproofing and coatings. As such no follow on trades were required to work over the swimming pool and the roof structure assembly was completed without the erection of internal or external scaffolding.

The repetition of the structure exploited the efficiencies possible through off-site fabrication.

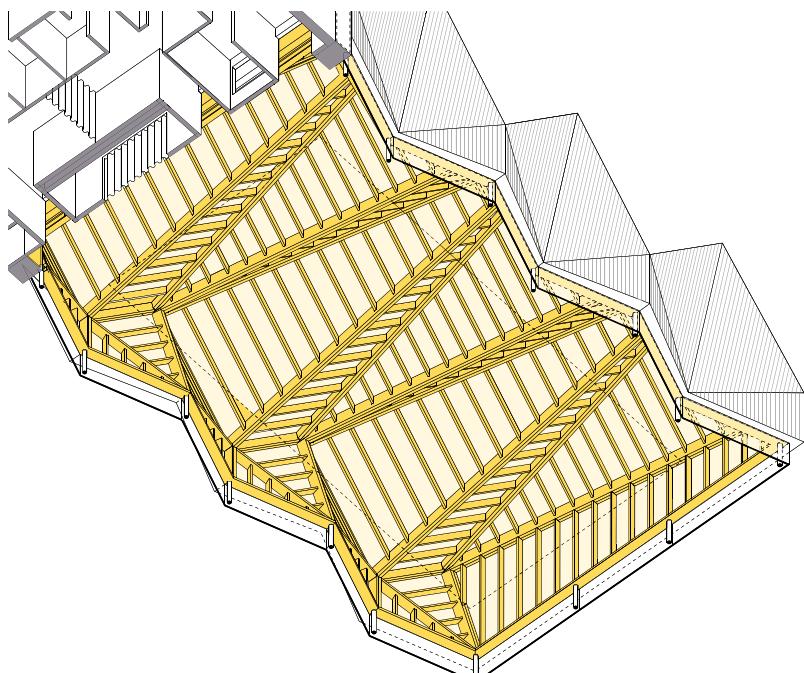

Isonometric Worms Eye View

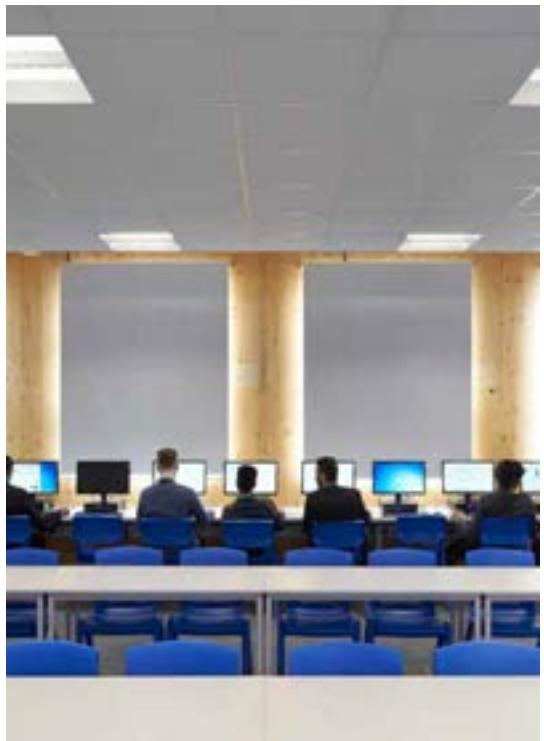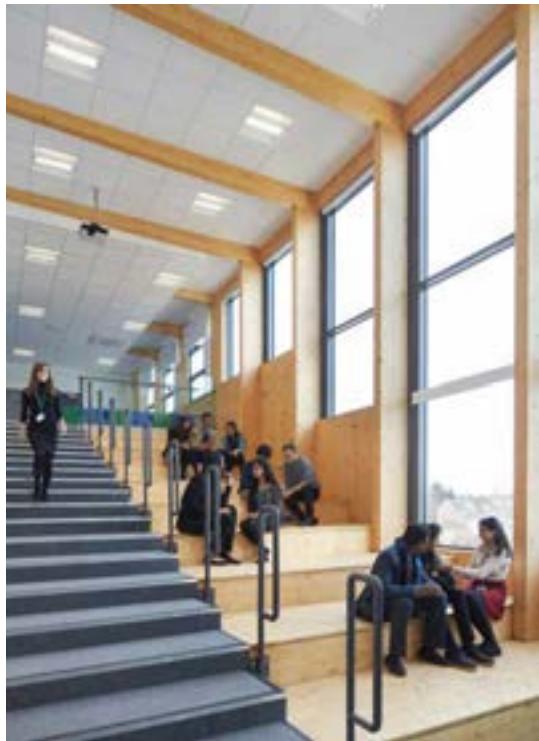

© Hufton + Crow

2014

Education  
**MAYFIELD SCHOOL**

Redbridge Council

**LOCATION**  
London Borough of Barking and Dagenham

**HEIGHT / STOREYS**  
39 ft (12 m) / 3 storeys

**CONSTRUCTION COST**  
£18.2 million

**ARCHITECT**  
David Miller Architects

**STRUCTURAL ENGINEER**  
Ramboll

**TIMBER ENGINEER**  
Ramboll

**TIMBER CONTRACTOR**  
KLH UK

**TIMBER MANUFACTURER**  
KLH Massivholz

**MAIN CONTRACTOR**  
Bouygues UK

**TIMBER VOLUME**  
110,500 ft<sup>3</sup> (3,128 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
12 weeks

**OVERALL CONSTRUCTION**

74 weeks

**STRUCTURE TYPE**  
Pure Timber


**EMBODIED CARBON WITHIN TIMBER\***  
-1,961 tons (-1,778.6 tonnes) CO<sub>2</sub>e

**CLT FACT**  
The use of BIM eased the translation of the design into CLT panels

With a 17-month program from design to completion this 91,000ft<sup>2</sup> school extension was only viable in CLT. Providing capacity to accommodate an additional 800 pupils and 80 staff, this new building delivers educational needs alongside their ambition to create a 'culture of aspiration'. Uplifting and flexible teaching spaces, a new social heart around a Hellerup stair and extensive sports facilities bring new opportunities for students and the local community.

The aesthetic aim was to develop a new visual style for the school, which could be drawn upon for the redevelopment of other blocks within the larger site. A mix of robust brick with 3 shades of Trespa cladding and render was chosen, the vast sports hall differentiated by a staggered pattern.

A set of "rules" was applied to the early design in order to maximize the efficiency of the CLT by optimizing spans and widths. Glulam was incorporated where wider spans were needed. Where possible the timber was expressed as part of the design concept bringing lightness and warmth to the interiors. The off-site manufacturing allowed the frame of the building to be removed from the critical path, while the low weight eliminated the need for piled foundations. This ensured the program could be met and disruption to the existing school was minimized. Fit-out was able to commence on the lower floors while the upper floors were still being erected.

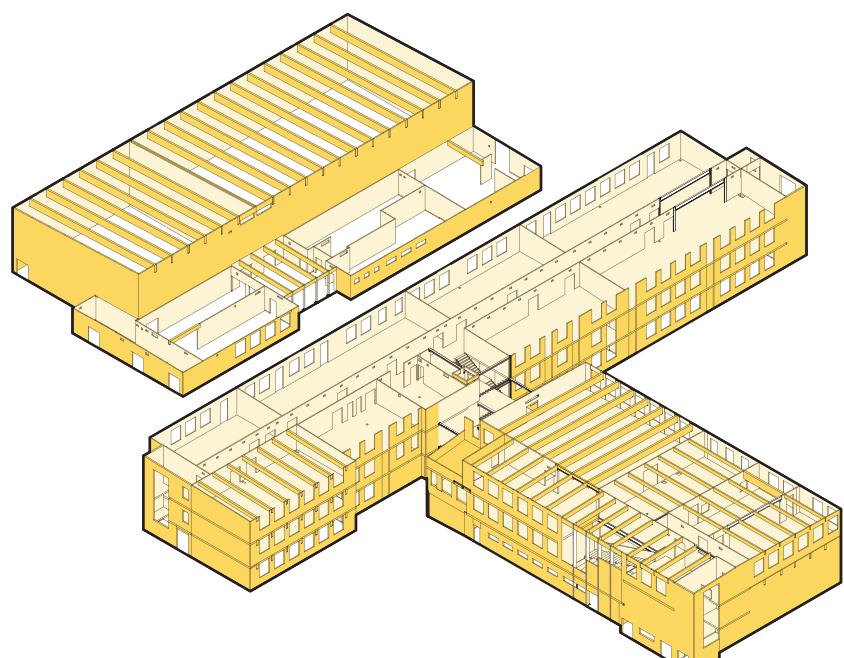

Sectional Axonometric of CLT



© Jack Hobhouse

**LOCATION**  
London Borough of Hackney

**HEIGHT / STOREYS**  
49 ft (15 m) / 4 storeys

**CONSTRUCTION COST**  
£12 million

**ARCHITECT**  
Jestico + Whiles

**STRUCTURAL ENGINEER**  
Mouchel

**TIMBER ENGINEER**  
Eurban

**TIMBER CONTRACTOR**  
Eurban

**TIMBER MANUFACTURER**  
Stora Enso

**MAIN CONTRACTOR**  
HG Construction

**TIMBER VOLUME**  
38,700 ft<sup>3</sup> (1,097 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
4 weeks

**OVERALL CONSTRUCTION**  
52 weeks

**STRUCTURE TYPE**  
Pure Timber

**EMBODIED CARBON  
WITHIN TIMBER\***  
-671 tons (-609 tonnes) CO<sub>2</sub>e

**CLT FACT**  
8 week program saving  
enabled delivery in time  
for term start


This new school reworks the existing 19th century French hospital building adding a part single (double-height) and part four-storey block to create a high school for 800 students.

The new building houses all the specialist teaching spaces, including art, science, D&T and music, while the historic building accommodates general teaching and library space, and a drama space in the former chapel.

Developed in the shadow of the existing structure, the new four-storey building encroaches as little as possible either physically, on the open space around the listed building, or visually on views towards the building.

Timber was utilized throughout the new building. All floors, walls and roof slabs are 100% CLT in addition to the large span sports hall and staircases. Glulam beams were utilized on the corridor to enable maximum flexibility of internal layout. Internally the CLT is left exposed with the wood's natural grain being subtly visible beneath the surface spread of flame white wash.

Timber is also seen in the windows and integrated acoustic ventilation louvres. An extensive green roof is planted with grasses and wild flowers, adding to the building's sustainability credentials. The main roof of the building has an array of solar panels concealed by a timber veil of Siberian larch.

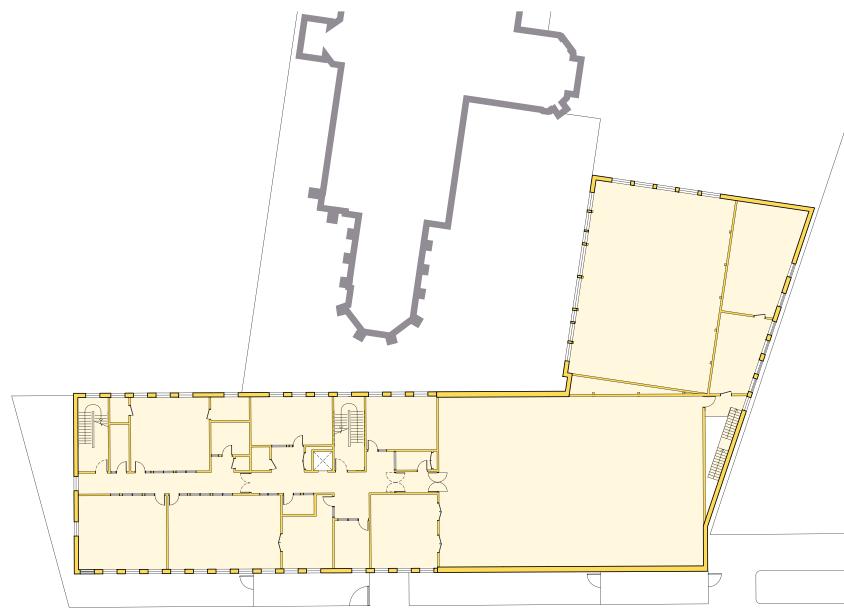



© Killian O'Sullivan

**LOCATION**  
 London Borough of Wandsworth

**HEIGHT / STOREYS**  
 33 ft (10 m) / 2 storeys

**CONSTRUCTION COST**  
 £ 976,000

**ARCHITECT**  
 Urban Projects Bureau

**STRUCTURAL ENGINEER**  
 Furness Partnership

**TIMBER ENGINEER**  
 G-Frame

**TIMBER CONTRACTOR**  
 G-Frame

**TIMBER MANUFACTURER**  
 Stora Enso

**MAIN CONTRACTOR**  
 Ashe Construction

**TIMBER VOLUME**  
 8,200 ft<sup>3</sup> (232 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 6 weeks

**OVERALL CONSTRUCTION**  
 52 weeks

**STRUCTURE TYPE**  
 Pure Timber


**EMBODIED CARBON  
WITHIN TIMBER\***  
 -144 tons (-131 tonnes) CO<sub>2</sub>e

**CLT FACT**  
 Exposing the CLT  
 reduced the cost of  
 expensive linings


With a budget of £1 million and a 12-month program to create a new senior school block, the architect reviewed the various prefabricated, modular and bespoke construction options for delivery within these constraints. CLT was selected for its rapid on-site construction, sustainability, feel and appearance. Through achieving maximum architectural output using minimal means, UPB have, through their design, set a realizable template for new school buildings in the current climate of short-termism and austerity.

The 8,600ft<sup>2</sup> building minimizes unnecessary floor area and maximizes daylight penetration and airflow. All the ground floor classrooms open directly onto sheltered external porches rather than corridors, and the first floor classrooms are all accessed directly via the two staircases. A double-skin polycarbonate front façade opens to frame views across the surrounding campus and also regulates solar gain.

Designed to be naturally ventilated all classrooms, staircases and double-height spaces are double or triple aspect, with cross ventilation and stack ventilation through high-level rooflights. The spaces are naturally lit throughout the day, reducing the need for electric lighting. Exposed CLT omits the need for internal linings, reducing material use and cost. The CLT frame, with translucent panels, cladding and openings, shapes the building and gives it character.

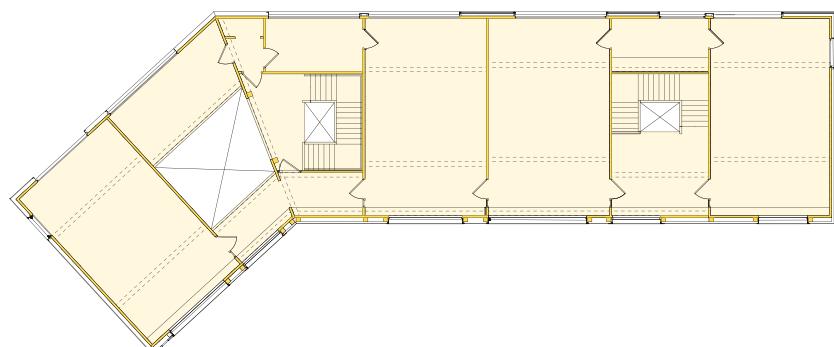

First Floor Plan

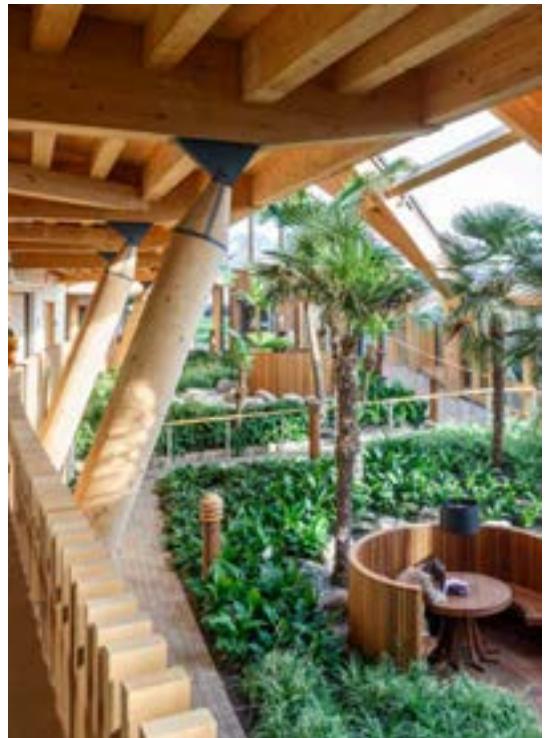

© Gareth Gardner

2015

Education

**ESSEX UNIVERSITY BUSINESS SCHOOL**

University of Essex

**LOCATION**  
Colchester, Essex

**HEIGHT / STOREYS**  
46 ft (14 m) / 3 storeys

**CONSTRUCTION COST**  
£14.7million

**ARCHITECT**  
BDP

**STRUCTURAL ENGINEER**  
BDP

**TIMBER ENGINEER**  
Engenuiti

**TIMBER CONTRACTOR**  
B & K Structures

**TIMBER MANUFACTURER**  
Binderholz

**MAIN CONTRACTOR**  
Morgan Sindall

**TIMBER VOLUME**  
45,200 ft<sup>3</sup> (1,279 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
28 weeks

**OVERALL CONSTRUCTION**  
69 weeks

**STRUCTURE TYPE**  
Hybrid

**EMBODIED CARBON  
WITHIN TIMBER\***  
-769 tons (-698 tonnes) CO<sub>2</sub>e


**CLT FACT**  
The first zero-carbon  
business school in the UK


Located in parkland on a hillside overlooking an estuary, this new business school forms an important link between the existing 1960s campus and the new knowledge gateway research park.

The three-storey building provides teaching space, a 250-seat lecture theatre and a winter garden that acts as an entrance and meeting space, with a café at one end and social spaces for students and staff at the other.

A zero carbon approach was at the forefront of the design resulting in a building which is visibly sustainable at every level: from its orientation on site; choice of structure and materials; to landscaping and passive engineering strategies. Shaped as a 'sundial' crescent the building is orientated with its centre point to the midday sun. The winter garden forms the inner ring to the crescent, running down the slope on the south side creating a major environmental buffer space that tempers the building, like a conservatory to a grand house.

The sustainably sourced curved timber frame and cladding were key aspects of the specification and thoughtfully integrate the building into a site surrounded by mature parkland. The hybrid frame incorporating substantial glulam beams alongside CLT allowed for the impressive volumes of the lecture theatres.

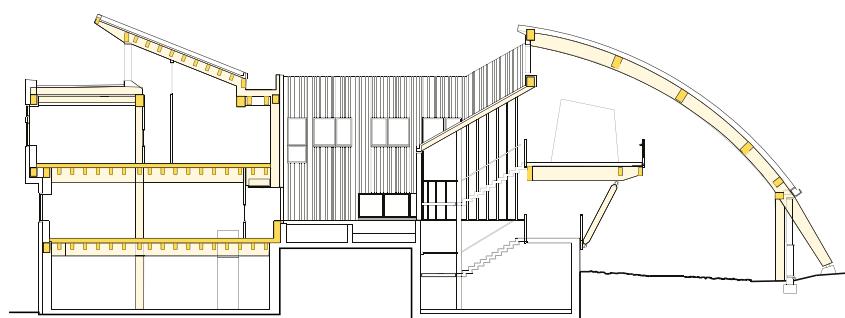

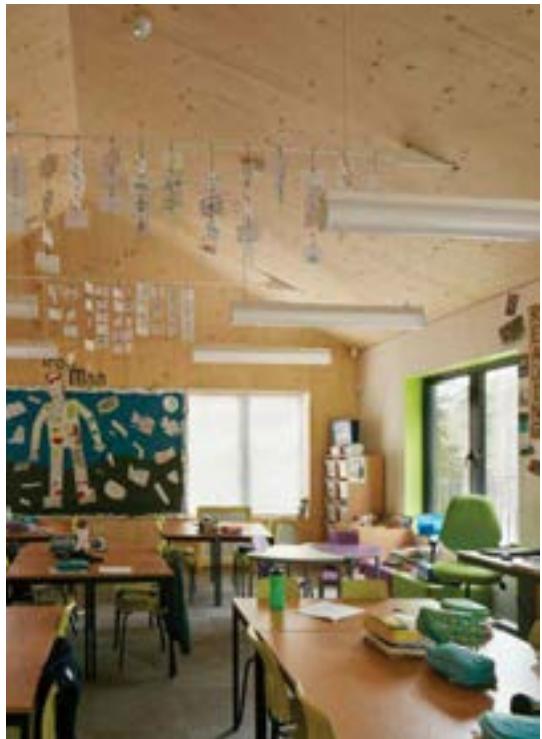

© Dennis Gilbert

2015

Education

## DAVENIES BOYS PREPATORY SCHOOL

Davenies Prepatory School

**LOCATION**  
Beaconsfield,  
Buckinghamshire

**HEIGHT / STOREYS**  
31 ft (9.3 m) / 2 storeys

**CONSTRUCTION COST**  
£4.6 million

**ARCHITECT**  
DSDHA

**STRUCTURAL ENGINEER**  
engineersHRW (formerly  
Jane Wernick Associates)

**TIMBER ENGINEER**  
KLH UK

**TIMBER CONTRACTOR**  
KLH UK

**TIMBER MANUFACTURER**  
KLH Massivholz

**MAIN CONTRACTOR**  
Beard Construction

**TIMBER VOLUME**  
13,100 ft<sup>3</sup> (370 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
7 weeks

**OVERALL CONSTRUCTION**  
65 weeks

**STRUCTURE TYPE**  
Hybrid

**EMBODIED CARBON  
WITHIN TIMBER\***  
-230 tons (-208 tonnes) CO<sub>2</sub>e

**CLT FACT**  
10% lower CO<sub>2</sub> emissions  
than the notional building


Davenies School is a collection of buildings set around historic formal gardens. This phase of the school's evolution consists of a new library, hall and 10 classrooms.

The various elements echo the school's agricultural past. The "link" provides a connection with the school's listed structures: the reception; a smaller scale environment for younger children; and the main wing, set around a verdant dell for learning and playing. These components are organized around a ground-tempered space that connects the historic garden to the new outdoor spaces.

Black 'wavey' edged timber clads the structure providing a striking contrast to the surrounding greenery. Its dark color reduces the perceived scale of the new building and harmonizes it with the historic setting.

CLT is used as the primary structure, forming the floor slabs, walls and roof structure. Left exposed internally the CLT contributes to the controlled material and color palette and provides the pupils with the opportunity to see how the building has been made.

A series of passive design measures, along with the CLT structure allowed this school to exceed the energy performance requirements of the building regulations.

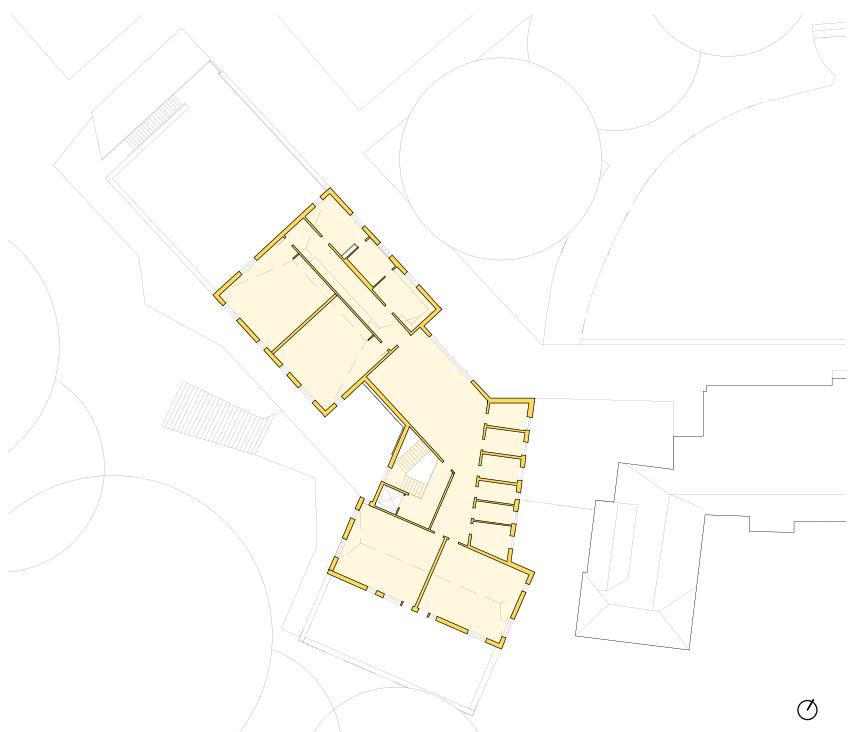

First Floor Plan in Context



© Tim Crocker

2015

Education

## WYNCH COTTAGE

Bishop's Stortford College

**LOCATION**  
Bishop's Stortford,  
Hertfordshire

**HEIGHT / STOREYS**  
26 ft (8 m) / 2 storeys

**CONSTRUCTION COST**  
£1 million

**ARCHITECT**  
Hawkins\Brown

**STRUCTURAL ENGINEER**  
Smith and Wallwork

**TIMBER ENGINEER**  
Smith and Wallwork

**TIMBER CONTRACTOR**  
KLH UK

**TIMBER MANUFACTURER**  
KLH Massivholz

**MAIN CONTRACTOR**  
Hutton Construction

**TIMBER VOLUME**  
5,000 ft<sup>3</sup> (143 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
2 weeks

**OVERALL CONSTRUCTION**  
41 weeks

**STRUCTURE TYPE**  
Pure CLT

**EMBODIED CARBON  
WITHIN TIMBER\***  
-89 tons (-81 tonnes) CO<sub>2</sub>e


**CLT FACT**  
Success here has  
ensured CLT's use for the  
masterplan phases 2,3&4

The first phase in the site wide masterplan, this project relocated and enhanced one of the college's day houses unlocking a site designated for further development.

The existing day house was beyond its working life, and in need of an upgrade. The project re-purposed and enhanced the existing Arts & Crafts building with a new extension. This phase of the masterplan also established a visual language for the development with exposed CLT, charred timber cladding and folded plate and pitched roofs delivering flexible, light, open spaces whilst offering variations on the traditional character of the conservation area.

The proximity to existing mature trees and buildings required careful consideration of the footprints, heights, and buildability. The CLT extension provides structural support to the existing cottage, which facilitates the opening up of the rear façade to connect into the new double height spaces.

The extension utilizes a CLT folded-plate roof to create large spans to the social spaces. CLT and services are exposed as features, minimizing costs, and providing a robust, contemporary finish to the new day house.

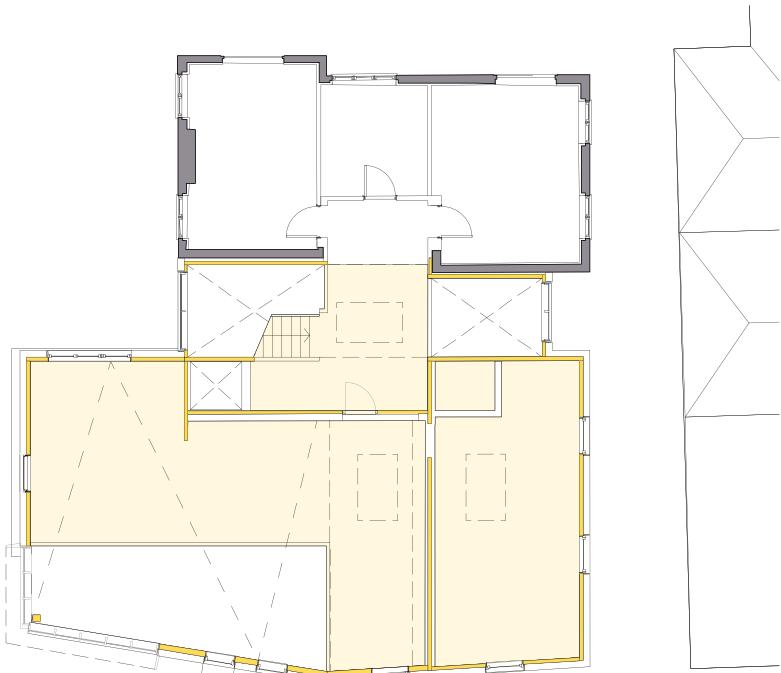

First Floor Plan



© Martine Hamilton-Knight

2016 Education

## GSK CENTRE FOR SUSTAINABLE CHEMISTRY

GlaxoSmithKline / University of Nottingham

**LOCATION**  
Nottingham,  
Nottinghamshire

**HEIGHT / STOREYS**  
72 ft (21.9 m) / 2 storeys

**CONSTRUCTION COST**  
£15.8 million

**ARCHITECT**  
Fairhursts Design Group

**STRUCTURAL ENGINEER**  
AECOM

**TIMBER ENGINEER**  
AECOM / Engenuiti

**TIMBER CONTRACTOR**  
B & K Structures

**TIMBER MANUFACTURER**  
Binderholz / Derix

**MAIN CONTRACTOR**  
Morgan Sindall

**TIMBER VOLUME**  
71,500 ft<sup>3</sup> (2,025 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
18 weeks

**OVERALL CONSTRUCTION**  
78 weeks

The objective of this project was to create a laboratory that would make no overall contribution to greenhouse gases throughout its entire lifecycle: from off-site procurement, site construction, and occupation to eventual demolition.

The use of a timber frame, alongside passive ridge ventilation and photovoltaics for renewable energy production, was essential in assuring this target would be met.

Constructed with a glulam frame, CLT panels form the floors, roof deck, exterior walls, and a number of internal divisions. Exposed timber finishes internally ensured limited linings and a resulting carbon benefit.


The stability of the structure comes from the CLT with steel cross-bracing at roof level transferring the loads into the vibro-stone foundations – a solution which limits the use of concrete and is possible due to the lighter weight of the timber frame.


Built at the lowest possible carbon cost, the building's renewable energy supply offsets the carbon associated with its energy efficient equipment, services and construction and sends surplus energy to the grid, while the CLT acts as a carbon sink. It has been calculated that all carbon associated with both the construction and operation of the building will be paid back within 25 years.

**STRUCTURE TYPE**  
Pure Timber

**EMBODIED CARBON  
WITHIN TIMBER\***  
-1,227 tons (-1,113 tonnes) CO<sub>2</sub>e

**CLT FACT**  
Completely carbon  
neutral laboratory

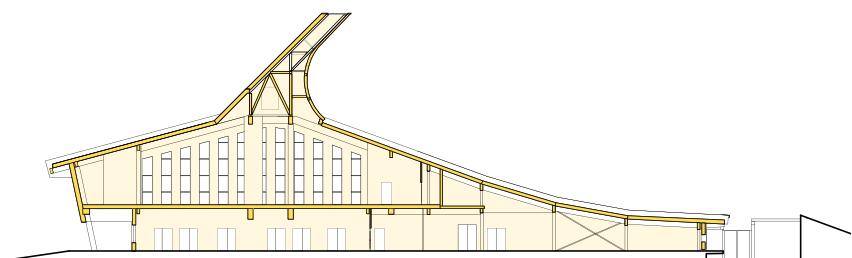

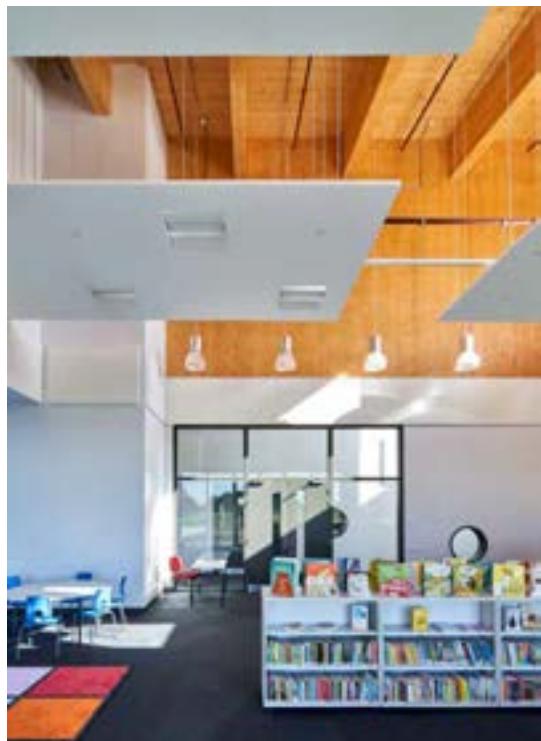

© Tim Soar

2016 Education

## ALCONBURY WEALD PRIMARY SCHOOL

Morgan Sindall for Cambridgeshire County Council / Urban & Civic

**LOCATION**  
Huntingdon,  
Cambridgeshire

**HEIGHT / STOREYS**  
13 - 33 ft (4 - 10 m) / 1-2  
storeys

**CONSTRUCTION COST**  
£7.8 million

**ARCHITECT**  
Allford Hall Monaghan  
Morris

**STRUCTURAL ENGINEER**  
Peter Dann Consulting  
Engineers

**TIMBER ENGINEER**  
Ramboll

**TIMBER CONTRACTOR**  
KLH UK

**TIMBER MANUFACTURER**  
KLH Massivholz

**MAIN CONTRACTOR**  
Morgan Sindall

**TIMBER VOLUME**  
52,800 ft<sup>3</sup> (1,495 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
10.5 weeks

**OVERALL CONSTRUCTION**  
54 weeks

**STRUCTURE TYPE**  
Pure Timber

**EMBODIED CARBON  
WITHIN TIMBER\***  
-924 tons (-838 tonnes) CO<sub>2</sub>e


**CLT FACT**  
Cost reductions through  
leaving CLT exposed

The three-winged plan of this new primary school echoes the site's rich avionic history and provides classrooms that have direct access to generous external areas. A double-height space in the centre of the plan is a modern re-interpretation of the reinforced concrete hangars housing shared facilities that can be used by the local community when the school is closed.


As the first civic building on a larger masterplan the school sets the intent for design quality around which the community will be developed.

Designed from the outset to have a CLT superstructure the frame has been thoughtfully and pragmatically exposed throughout the development, providing a strong aesthetic language whilst also reducing the need for applied finishes, thereby reducing costs. Extensive acoustic studies were completed to ensure the areas with higher acoustic performance requirements were met, occasionally resulting in the depth of certain CLT walls being increased beyond their structural necessity.

Using CLT reduced on site works by 6-8 weeks which enabled the challenging construction program to be realized. The school opened only two years after design work had commenced.

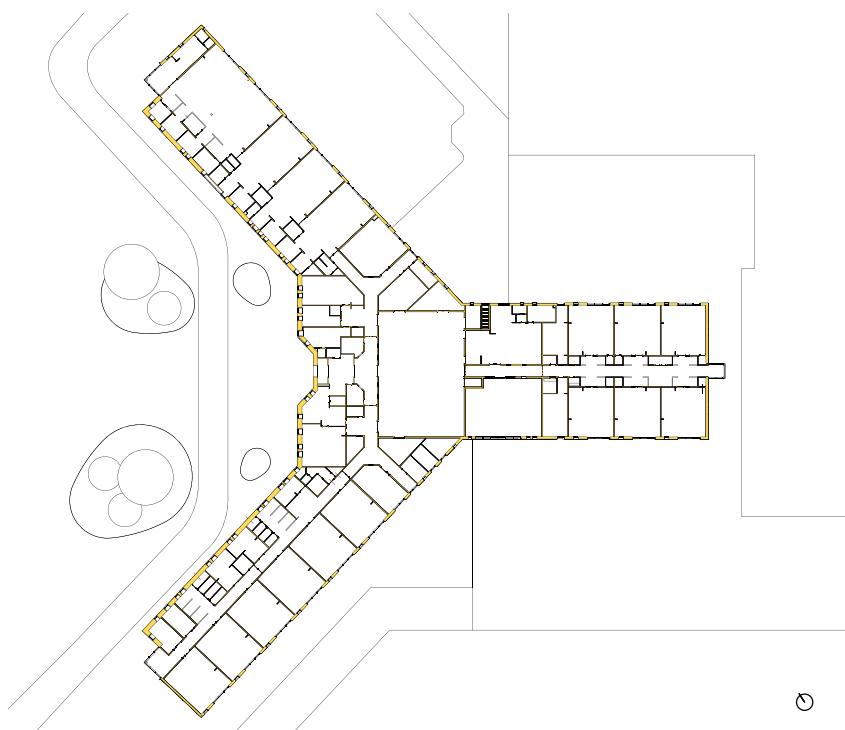

Ground Floor Plan

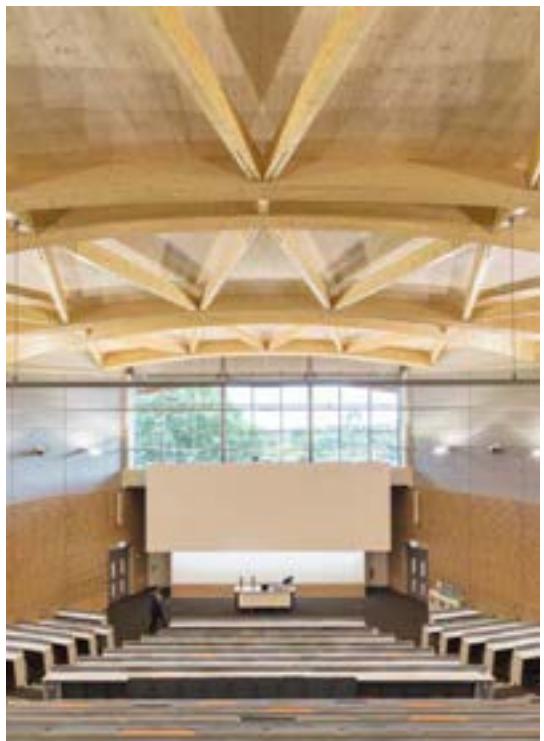

© Quintin Lake

2016

Education

## OCULUS TEACHING BUILDING

The University of Warwick

**LOCATION**

Warwick, Warwickshire

**HEIGHT / STOREYS**

46 ft (14 m) / 3 storeys

**CONSTRUCTION COST**

£14.2 million

**ARCHITECT**

Berman Guedes  
Stretton

**STRUCTURAL ENGINEER**

Copeland Wedge  
Associates (CWA)

**TIMBER ENGINEER**

B & K Structures

**TIMBER CONTRACTOR**

B & K Structures

**TIMBER MANUFACTURER**

Binderholz

**MAIN CONTRACTOR**

Willmott Dixon

**TIMBER VOLUME**

44,100 ft<sup>3</sup> (1,250 m<sup>3</sup>)

**TIMBER ASSEMBLY**

10 weeks

**OVERALL CONSTRUCTION**

73 weeks

**STRUCTURE TYPE**

Hybrid

**EMBODIED CARBON  
WITHIN TIMBER\***

-775 tons (-703 tonnes) CO<sub>2</sub>


**CLT FACT**

Timber roof as a  
statement regarding  
sustainability

Located at the social centre of campus, the Oculus provides the University of Warwick with its first building dedicated purely to teaching and available to all academic departments. Just fewer than 1,400 new teaching seats are delivered within two raked lecture theatres and a range of flat-floored teaching rooms which accommodate groups ranging in size from 30 to 100.

The teaching spaces are located in two wings that support a dramatic arched timber roof, beneath which are the lecture theatres. This impressive glulam timber roof, and the curved three-storey glass façade beneath it, is the statement feature of the building – making it instantly recognisable, boosting the natural aesthetic, and improving sustainability by reducing embodied carbon.

The building responds to its central location, being legible and accessible from all directions, with ground floor teaching spaces opening out onto terraces. Generous circulation spaces flow around the lecture theatres within and create enclaves of space for social learning whilst the inclusion of a café further promotes the use of the building by students beyond formal teaching sessions. The building sets the architectural direction of the wider university campus masterplan using a warm palette of natural materials, expansive and generous geometry, and a high degree of transparency and openness.

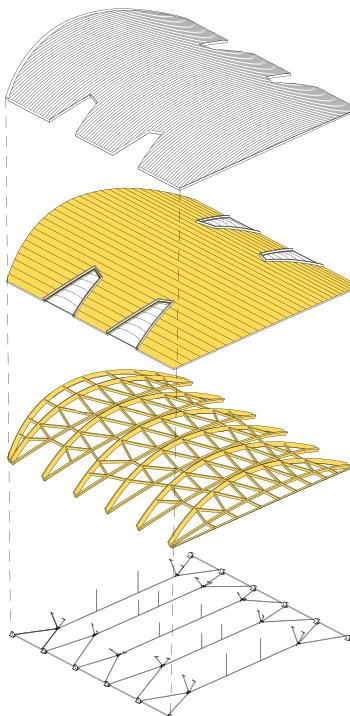

Exploded Diagram of Roof Structure



© Martin Cleveland



© Paul Younger



© Martin Cleveland

2016 Education

## S G S BERKELEY GREEN

South Gloucestershire and Stroud College

**LOCATION**

Berkeley, Gloucestershire

**HEIGHT / STOREYS**

58 ft (17.7 m) / 3 storeys

**CONSTRUCTION COST**

£3.2 million

**ARCHITECT**

Hewitt Studios

**STRUCTURAL ENGINEER**

O'Brien & Price

**TIMBER ENGINEER**

O'Brien & Price

**TIMBER CONTRACTOR**

Hess Timber

**TIMBER MANUFACTURER**

Hess Timber / Pollmeier  
Massivholz

**MAIN CONTRACTOR**

Kier

**TIMBER VOLUME**

7,400 ft<sup>3</sup> (210 m<sup>3</sup>)

**TIMBER ASSEMBLY**

3 weeks

**OVERALL CONSTRUCTION**

52 weeks

**STRUCTURE TYPE**

Pure Timber

**EMBODIED CARBON  
WITHIN TIMBER\***

-135 tons (-122 tonnes) CO<sub>2</sub>

**CLT FACT**


First use of hardwood  
LVL in the UK


The project is the first phase of the conversion and refurbishment of a former nuclear research and engineering centre to provide South Gloucestershire and Stroud College with a renewable energy and engineering skills hub. The building is designed to become an exemplar of regenerative investment and an educational tool in its own right with elements of the building fabric used to deliver specific areas of the curriculum (e.g. solar pv and timber construction).

Steel would have been the obvious choice for the alterations, but instead an innovative hybrid structure uses CLT floor slabs, supported on a network of LVL joists to keep floor depths to a minimum and co-ordinate with the existing building. The LVL used was made from Beech hardwood, the high strength (70N/mm<sup>2</sup> vs. 48 N/mm<sup>2</sup>) of which allowed for a structure with significantly smaller dimensions compared to a laminated softwood solution.

Limited construction space, due to the fact the prefabricated assembly had to take place within an existing building, necessitated the use of smaller sections and, where this was not possible, advanced crane and handling techniques.

The delivery of a reinvigorated, dynamic and sustainable facility re-using an existing building sets a low-carbon precedent for future developments.

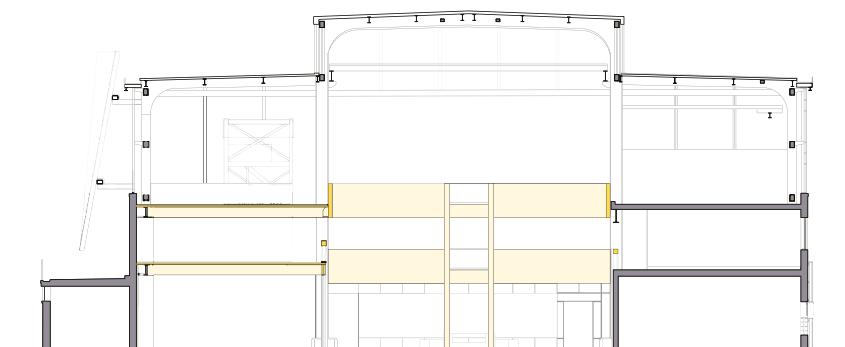

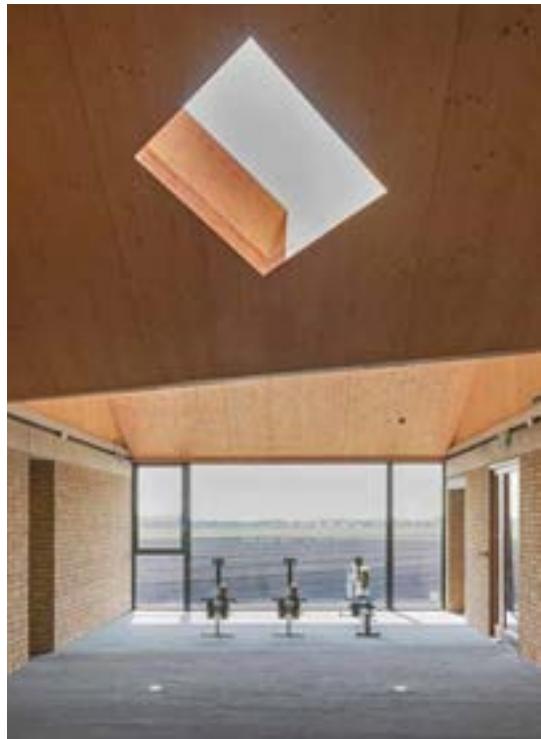

© Koen Van Damme

2017 Sports & Leisure (Education)

## ELY BOATHOUSE

Cambridge University Boathouse

**LOCATION**

Ely, Cambridgeshire

**HEIGHT / STOREYS**

37 ft (11.4 m) / 2 storeys

**CONSTRUCTION COST**

£3 million

**ARCHITECT**

Jeremy Bailey Architects  
/ Baynes and Mitchell

**STRUCTURAL ENGINEER**

Smith and Wallwork

**TIMBER ENGINEER**

Smith and Wallwork

**TIMBER CONTRACTOR**

KLH UK

**TIMBER MANUFACTURER**

KLH Massivholz

**MAIN CONTRACTOR**

Morgan Sindall

**TIMBER VOLUME**

6,900 ft<sup>3</sup> (194 m<sup>3</sup>)

**TIMBER ASSEMBLY**

3 weeks

**OVERALL CONSTRUCTION**

65 weeks

Built on a greenfield riverside site on a floodplain the design for the boathouse needed to be ecologically sensitive whilst also taking into consideration flood risk. The objective of the design was to create a building which would become an organic part of the riverbank, rooted in its setting.

The striking roof is formed of a folded CLT plate sitting on steel valley beams that span between concrete and reinforced brickwork cross walls. The twisted geometry of the folded roof creates an abstract silhouette, its shape mirroring the birds that fly over the adjacent waterways. The complex geometry of the roof required careful 3D modelling and the accurate CNC cutting possible with CLT, making for fast and easy assembly on site.

The timber, a natural material with low embodied carbon, ensures complicity between the building and the ecologically sensitive location. A new reed bed and lagoon created at the opposite end of the site provides an improved local habitat for wildlife.

**STRUCTURE TYPE**


Hybrid

**EMBODIED CARBON WITHIN TIMBER\***

-122 tons (-111 tonnes) CO<sub>2</sub>e

**CLT FACT**

Prefabrication enabled the complicated roof form

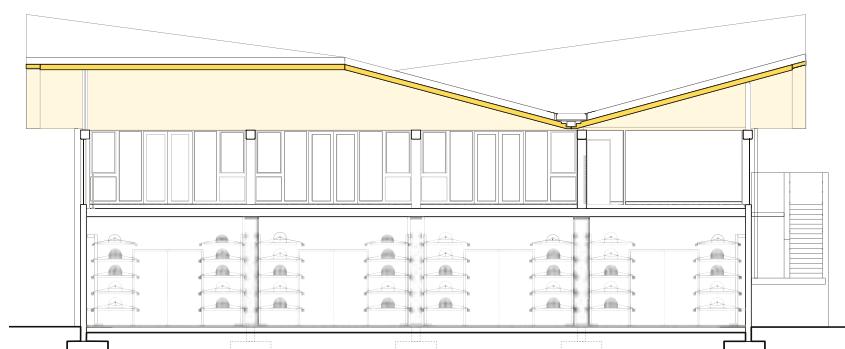

Section



# RESIDENTIAL

CLT as a product was initially developed to be aimed at the residential sector. Since then it has been consistently popular in these projects. The maximum span that can be achieved with CLT panels of average thickness is similar to the proportions of typical residential spaces. Due to this relationship, pure CLT structures, using little or no glulam/steel, are usually possible.

Residential projects constructed in CLT largely fall within one of two main categories. The first being individual one-off dwellings, typically where the client is building their own house. The use of CLT here is often driven by aesthetics, desire for exposed timber finishes and building sustainability. Time saving is usually less significant to clients of this type of scheme, whose primary focus tends to be on the creation of a high quality and beautiful home. For small low rise projects, where structural demands are less, CLT can provide a great deal of freedom in design which can lead to some interesting and impressive volumes. The natural robust walls are tactile, with an inherent ease of fixing to the structure. The lower requirements for fire and acoustics within individual dwellings mean exposing the timber is usually an easier process.

The second category is high-density, mid-to-high rise housing blocks. Here the key drivers for using CLT tend to be the ease and speed of construction. In such schemes the CLT is rarely exposed. This is primarily due to the fact that for these schemes the CLT itself is typically not capable of meeting the stringent requirements for fire and acoustics unless lined to at least one face. In addition to this, particularly for earlier schemes, issues with obtaining insurance and fears over the saleability of flats led to a client desire to conceal the structure's nature.

The potential to use CLT to create vast honeycomb structures delivering the many cellular volumes of a high-density housing scheme means that the program benefits offered by CLT can be truly optimized.

Image: Woodblock House, dRMM © Alex de Rijke



© Edmund Sumner

**LOCATION**  
London Borough of Lambeth

**HEIGHT / STOREYS**  
20 ft (6 m) / 2 storeys

**CONSTRUCTION COST**  
£350,000

**ARCHITECT**  
Pringle Richards Sharratt

**STRUCTURAL ENGINEER**  
Alan Baxter Ltd.

**TIMBER ENGINEER**  
Eurban

**TIMBER CONTRACTOR**  
Eurban

**TIMBER MANUFACTURER**  
Züblin Timber (formerly Finnforest Merk)

**MAIN CONTRACTOR**  
DF Keane / Züblin Timber

**TIMBER VOLUME**  
1,700 ft<sup>3</sup> (74 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
2 weeks

**OVERALL CONSTRUCTION**  
36 weeks

**STRUCTURE TYPE**  
Pure CLT

**EMBODIED CARBON  
WITHIN TIMBER\***  
-28 tons (-26 tonnes) CO<sub>2</sub>e


**CLT FACT**  
Lightweight CLT  
facilitated building on  
poor ground conditions

3 Carlisle Lane is a two-storey new-build residential scheme comprising four one-bedroom apartments on a tight urban site. Poor ground conditions combined with the site's close proximity to a railway viaduct necessitated a lightweight structure with good acoustic properties. The solution was to construct the entire building envelope from prefabricated lightweight solid timber panels.

The site extends 65 foot back from Carlisle Lane but has a street frontage of just 23 foot. The concept was to split the site in two, with a long thin strip of built accommodation occupying the southern side and a private courtyard occupying the northern side. This approach was partly driven by the fact that three of the site boundaries are party walls and new window frontage could be created only within the site itself.

The new timber structure was built within the existing masonry perimeter walls which provide additional fire resistance, thermal mass and acoustic protection from the adjacent railway viaduct.

The lightweight nature of the CLT structure meant that the slab to the warehouse could also be retained with a new concrete raft cast over the top to spread the load. This obviated the need for more substantial foundations and piling on the poor quality ground, reducing costs.

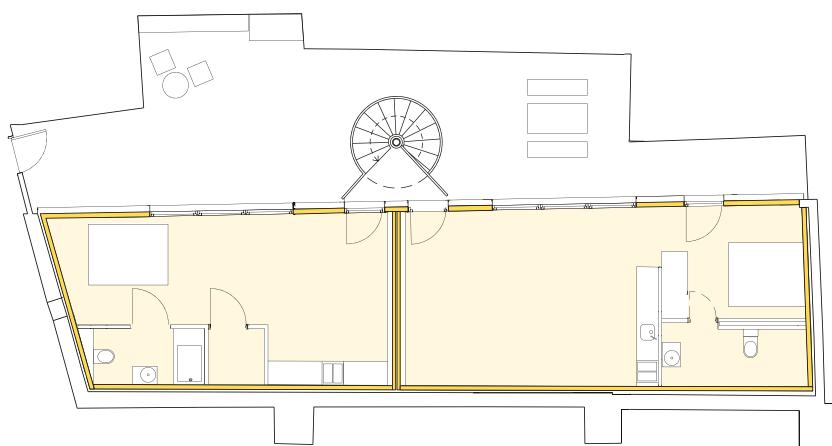

First Floor Plan





© Anthony Coleman

2006      Residential  
**FAIRMULE HOUSE**  
LINT Group

**LOCATION**  
London Borough of  
Hackney

**HEIGHT / STOREYS**  
45 ft (13.8 m) / 5 storeys

**CONSTRUCTION COST**  
£1.6 million

**ARCHITECT**  
Quay2c Architects

**STRUCTURAL ENGINEER**  
Anders Associates

**TIMBER ENGINEER**  
Eurban

**TIMBER CONTRACTOR**  
Eurban

**TIMBER MANUFACTURER**  
Züblin Timber (formerly  
Finnforest Merk)

**MAIN CONTRACTOR**  
L I Construction

**TIMBER VOLUME**  
15,000 ft<sup>3</sup> (425 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
5 weeks

**OVERALL CONSTRUCTION**  
65 weeks

**STRUCTURE TYPE**  
Pure CLT

**EMBODIED CARBON  
WITHIN TIMBER\***  
-267 tons (-242 tonnes) CO<sub>2</sub>


**CLT FACT**  
Largest early mixed use  
building in the UK using  
CLT, including lift shaft

Thomas Fairchild, the first man to genetically modify plants to manufacture his famous "Fairchild Mule" hybrid, is buried in the pocket park to the rear of the site. The scheme was conceived with this in mind, and the desire to create a hybrid building 'made from nature' drove the concept.


Originally designed for concrete and steel, a review of the scheme resulted in 11 dual aspect, cross-ventilated apartments, all but one of which have a private balcony or terrace. Apartments are accessed from two naturally lit common staircases which encourage horizontal circulation to take place in the street rather than the dark corridors of the original design. The ground and first floor provide seven commercial units of varying sizes to encourage a greater diversity of uses to compliment the flats above.

One of the first CLT buildings within the UK the timber sits on a concrete slab with a small steel portal to the ground floor of the 5 storey part of the building. Timber soffits are exposed throughout the apartments, a key requirement of the design.

The façades of the building are inspired by the Fairchild Mule including bespoke public art by Quay 2c's Julia Manheim. The galvanized steel panels used on the elevation recall watering cans, while the garden elevation is covered with timber shingles.

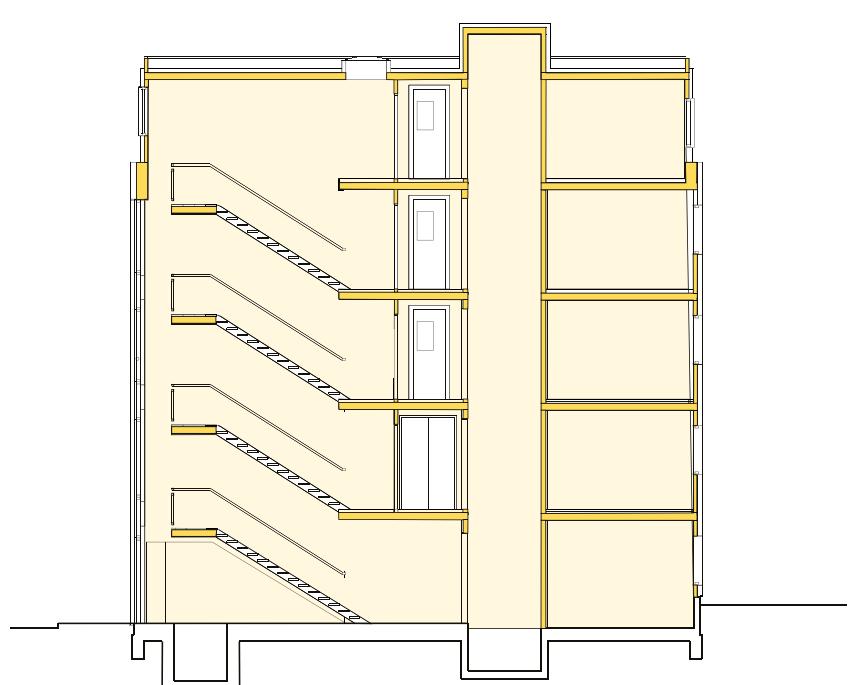

Section

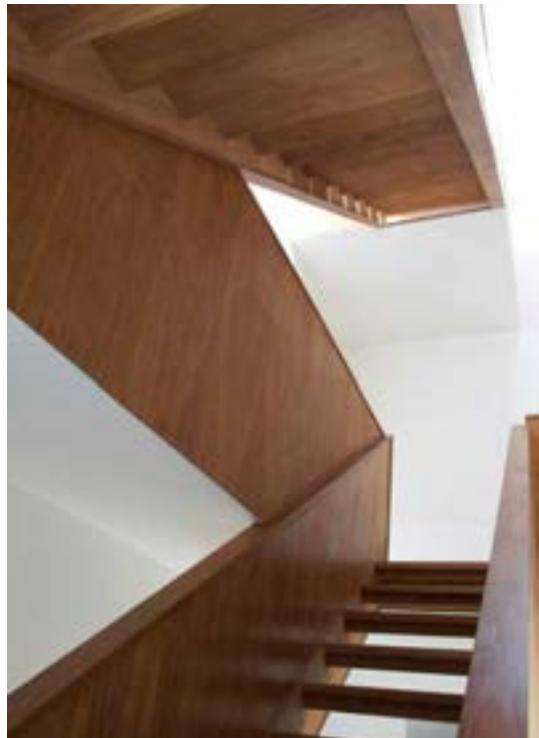

© Ed Reeve

2007      Residential (Private)  
**SUNKEN HOUSE/ED'S SHED**  
 Ed Reeve

**LOCATION**  
 London Borough of  
 Hackney

**HEIGHT / STOREYS**  
 23 ft (6.9 m) / 3 storeys

**CONSTRUCTION COST**  
 Undisclosed

**ARCHITECT**  
 Adjaye Associates

**STRUCTURAL ENGINEER**  
 Techniker

**TIMBER ENGINEER**  
 Eurban

**TIMBER CONTRACTOR**  
 Eurban

**TIMBER MANUFACTURER**  
 Züblin Timber (formerly  
 Finnforest Merk)

**MAIN CONTRACTOR**  
 Ed Reeve

**TIMBER VOLUME**  
 2,600 ft<sup>3</sup> (74 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 1 week

**OVERALL CONSTRUCTION**  
 52 weeks

**STRUCTURE TYPE**  
 Pure CLT

**EMBODIED CARBON  
 WITHIN TIMBER\***  
 -46 tons (-42 tonnes) CO<sub>2</sub>


**CLT FACT**  
 CLT assembly in one  
 week


Sunken House, known affectionately as 'Ed's shed', is a three-storey family home in North Hackney designed for photographer Ed Reeves. The design of the home responds to its immediate context, drawing from the local architecture of Victorian terraced houses and warehouse workshops.

Viewed from the street, the house appears to have the same habitable volume as the adjacent semi-detached villa, and the flat roof of the cuboid structure aligns with the warehouse opposite. However Ed's shed has been sunk an entire storey to maximize the interior space. Standing in an excavated courtyard, which is not overlooked by the adjacent buildings, the main living space is located at basement level. The bedrooms are on the first floor, and there is a large studio on the second floor which benefits from a view of other people's gardens without intruding on their privacy.

All façades of the house and the horizontal surface of the concrete patio are clad in a timber rainscreen of dark stained cedar.

The CLT upper levels, which sit on the excavated concrete lower floor were erected in a single week, substantially reducing the overall construction program.

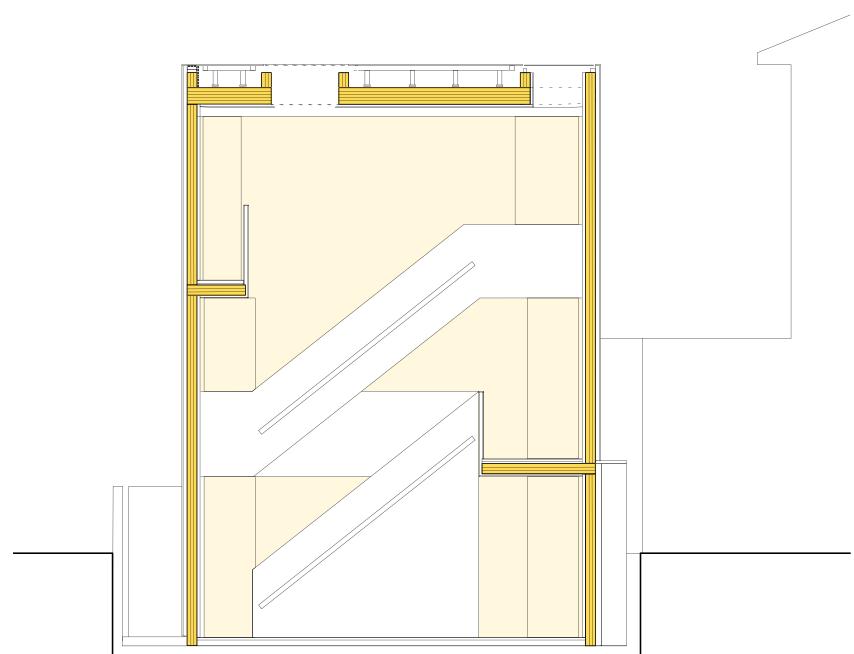

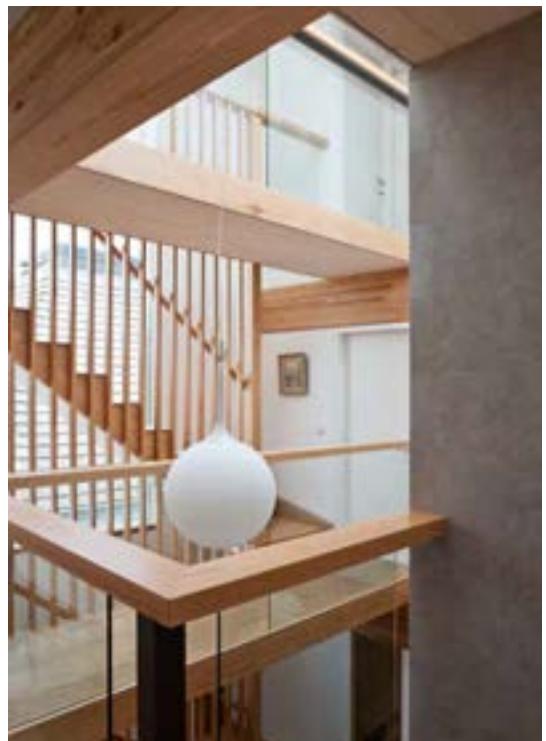

© David Butler

2008      Residential (Private)  
**CAVENDISH AVENUE**  
Hugo Macey & Hajni Elias

**LOCATION**  
Cambridge

**HEIGHT / STOREYS**  
28 ft (8.4 m) / 3 storeys

**CONSTRUCTION COST**  
Undisclosed

**ARCHITECT**  
Mole Architects

**STRUCTURAL ENGINEER**  
Ramboll / Whitbybird

**TIMBER ENGINEER**  
Ramboll

**TIMBER CONTRACTOR**  
KLH UK

**TIMBER MANUFACTURER**  
KLH Massivholz

**MAIN CONTRACTOR**  
Cambridge Building  
Company

**TIMBER VOLUME**  
2,600 ft<sup>3</sup> (74 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
1 week

**OVERALL CONSTRUCTION**  
43 weeks

**STRUCTURE TYPE**  
Pure Timber

**EMBODIED CARBON  
WITHIN TIMBER\***  
-45 tons (-41 tonnes) CO<sub>2</sub>

**CLT FACT**  
Measured in-use  
energy efficiency meets  
Passivhaus standards


Cavendish Avenue house re-interprets the suburban villa, replacing a 1930s detached home in a tree-lined suburban enclave of Victorian and Edwardian detached houses close to the centre of Cambridge.

The building is constructed of CLT panels, supported by glulam beams and columns. The north-facing front elevation is clad in a semi-reflective patterned glass rain-screen, with a pitch-roofed shingled structure extending into the front lawn from the first storey. Enclosed separately from the main house, this intimate, timber-lined music room references the surrounding architecture.


A skeleton of the glulam beam structure extends to the rear to form a solar shading portico in the garden. Roof-lights can be opened for ventilation, whilst large sail rigs hung across the portico beams on the rear façade provide shade and prevent the house from over-heating.

The solid floors act as a thermal heatsink, minimizing the need for additional heating. The dark basalt tiles on the internal ground floor absorb heat during the day, which is slowly released overnight. A ground-source heat pump provides hot water and the minimal heating required.

The building uses less than the target of 4,750 Btu/ft<sup>2</sup> (15 kWh/m<sup>2</sup>) for space heating – equivalent to German Passivhaus standards.

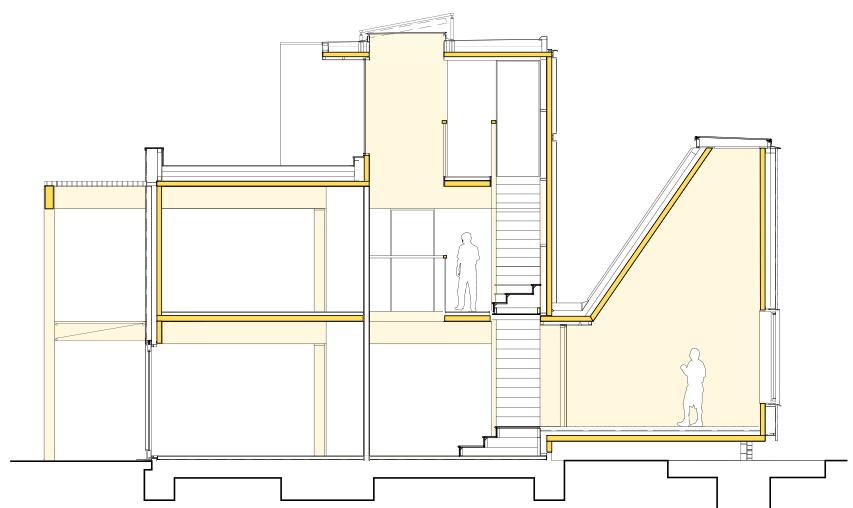

Section

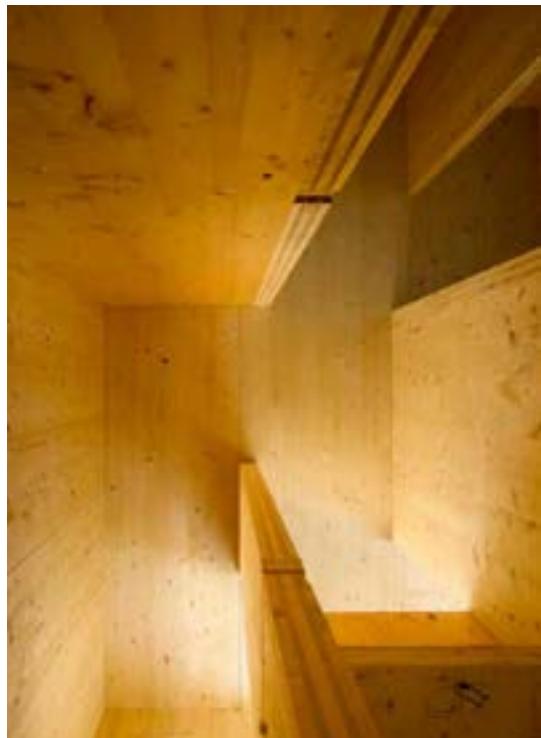

© Will Pryce

2009      Residential  
**STADTHAUS / MURRAY GROVE**  
Metropolitan Housing Trust / Telford Homes PLC

**LOCATION**  
London Borough of  
Hackney

**HEIGHT / STOREYS**  
95 ft (29 m) / 9 storeys

**CONSTRUCTION COST**  
£3.86 million

**ARCHITECT**  
Waugh Thistleton  
Architects

**STRUCTURAL ENGINEER**  
Techniker / Jenkins &  
Potter

**TIMBER ENGINEER**  
Techniker / KLH UK

**TIMBER CONTRACTOR**  
KLH UK

**TIMBER MANUFACTURER**  
KLH Massivholz

**MAIN CONTRACTOR**  
Telford Homes

**TIMBER VOLUME**  
31,800 ft<sup>3</sup> (901 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
9 weeks

**OVERALL CONSTRUCTION**  
49 weeks

**STRUCTURE TYPE**  
Pure CLT

**EMBODIED CARBON  
WITHIN TIMBER\***  
-557 tons (-505 tonnes) CO<sub>2</sub>e

**CLT FACT**  
If built today it could use  
30% less timber due to  
modern analytical tools

This was first tall building using engineered timber, and was the tallest timber residential structure in the world at the time of completion. The entire structure above first floor slab is comprised of CLT panels, with all walls, floor slabs and lift cores formed in solid timber which act together, like a honeycomb, providing a very stable and efficient building.

The building form is an extrusion of the site footprint to 9 storeys, which was largely predetermined by planning constraints. The client required separate entrances for affordable and private apartments which resulted in a mirrored ground floor plan from east to west. Different layouts are used throughout the building to accommodate a mix of family units and smaller apartments. These are facilitated through the use of load-bearing CLT panels, which form party walls and some internal partitions.

The distinctive pixelated façade is made up of 2,500 individual panels in three hues, which are arranged to capture how shadows fall across the building. The lightweight wood-pulp cladding avoids adding unnecessary bulk to the tower.

In creating a world first, the design team, contractor and timber supplier had to collaborate closely and work together with the client to overcome regulatory hurdles and demonstrate the resilience and safety of the building.

This exemplar project has spearheaded the introduction of CLT in the UK, and pioneered an international movement in tall timber construction.



Axonometric of CLT



© ACME



© ACME



2009      Residential (Private)  
**HUNSETT MILL**  
 Private Client

**LOCATION**  
 Stalham, Norfolk

**HEIGHT / STOREYS**  
 21 ft (6.5 m) / 2 storeys

**CONSTRUCTION COST**  
 Undisclosed

**ARCHITECT**  
 ACME

**STRUCTURAL ENGINEER**  
 AKT II

**TIMBER ENGINEER**  
 Eurban / AKT II

**TIMBER CONTRACTOR**  
 Eurban

**TIMBER MANUFACTURER**  
 Züblin Timber (formerly  
 Finnforest Merk)

**MAIN CONTRACTOR**  
 Willow Builders / Eurban  
 / Nuttall

**TIMBER VOLUME**  
 2,900 ft<sup>3</sup> (82 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 2 weeks

**OVERALL CONSTRUCTION**  
 43 weeks

**STRUCTURE TYPE**  
 Pure CLT

**EMBODIED CARBON  
 WITHIN TIMBER\***  
 -51 tons (-46 tonnes) CO<sub>2</sub>e


**CLT FACT**  
 Open ground floor space  
 created by hanging first  
 floor plate

The extension to this 19th century mill keeper's cottage sits adjacent to the Grade II listed mill. Since the end of its working life in 1900, the house has been a private residence, extended with a series of ill-conceived add-ons which had caused subsidence and repeated flooding. When further space was required it was decided to re-instate the house to its original proportions with only a single extension to one side.



The extension is designed as a shadow of the existing house which retreats behind the listed mill. Clad in dark charred cedar boards the geometry of the extension appears ambiguous from afar. A series of undulating pitched roofs mimic the local vernacular.

The extension is made entirely from CLT which is exposed as interior finish. The unique geometry of the roof forms a stiff plane from which the first floor is hung, allowing for a large, open-plan ground floor.

The design considered its embodied energy and method of construction alongside the efficiency during occupation. In addition to the timber structure, ground source heat pumps, passive solar heating and an independent water-well make the house almost completely self-sufficient, creating a home that is aesthetically innovative, responsive to contemporary needs and sensitive to its surroundings.

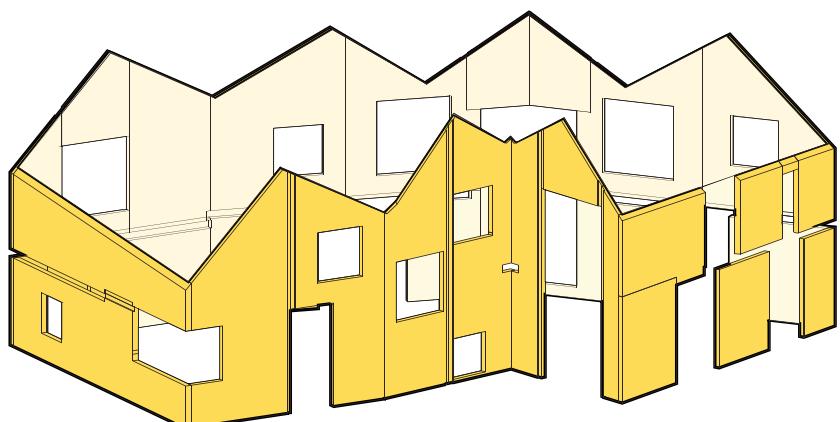

Isonometric CLT Panel Diagram

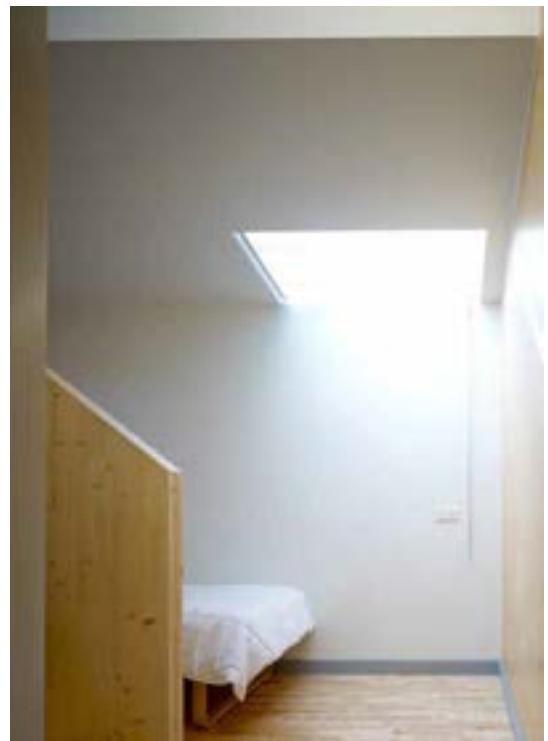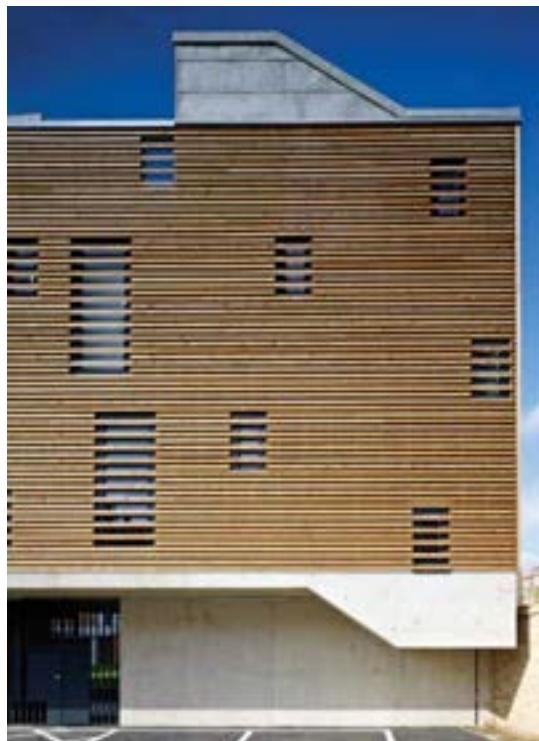

© Tim Soar

**LOCATION**  
 Cambridge,  
 Cambridgeshire

**HEIGHT / STOREYS**  
 39 ft (12 m) / 1.5 - 4 storeys

**CONSTRUCTION COST**  
 £2.6 million

**ARCHITECT**  
 5th Studio

**STRUCTURAL ENGINEER**  
 Michael Hadi Associates

**TIMBER ENGINEER**  
 Michael Hadi Associates  
 / Eurban

**TIMBER CONTRACTOR**  
 Eurban

**TIMBER MANUFACTURER**  
 Schilliger Holz

**MAIN CONTRACTOR**  
 SDC

**TIMBER VOLUME**  
 8,800 ft<sup>3</sup> (250 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 4 weeks

**OVERALL CONSTRUCTION**  
 50 weeks

**STRUCTURE TYPE**  
 Pure CLT


**EMBODIED CARBON  
 WITHIN TIMBER\***  
 -161 tons (-146 tonnes) CO<sub>2</sub>

**CLT FACT**  
 Speed of construction  
 enabled tight program to  
 be met


While the city fringe college site offers a generous garden space, the poor positioning of the original building and overlooking caused by adjacent plots had created awkward relationships between buildings. This project adds twenty-two rooms and capsule apartments, re-focusing the existing buildings around a green garden court to create an intimate college setting that politely screens adjacent sites.

Site constraints dictated it was necessary to build up to an irregular boundary on three sides. The choice of CLT for the structure meant that through the precision manufacturing process every dimension could be exactly specified. The relatively slender structural profiles of the floor, roof and wall panels (with no downstand beams or ribbed structures) maximized the useable volume of the new building.

Newly built rooms face the courtyard and are brought together by generous corridors, echoing the traditional architecture of Cambridge colleges. The ground floor duplex rooms that define the courtyard edges are ingeniously planned in cross section, allowing double height space, natural light sources and cross ventilation to each room. Selectively exposed CLT offers a warm and aesthetically pleasing finish; suitably robust and requiring minimal maintenance or decoration. The exposed timber buffers moisture and VOC's, contributing to high air quality and comfort conditions throughout the building.

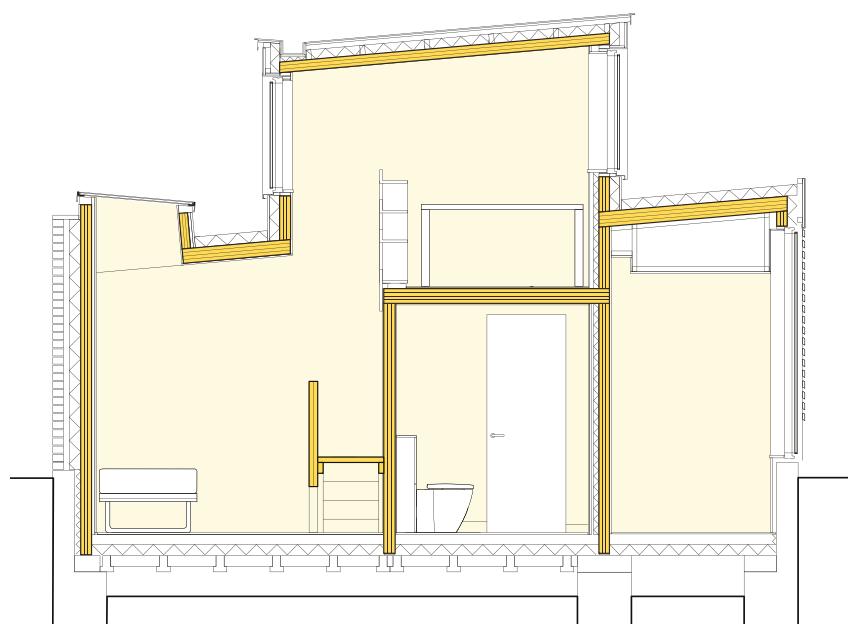

Section

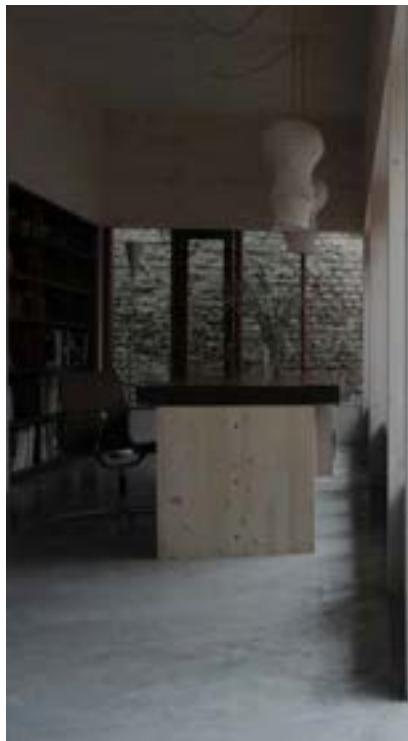

© David Grandorge

2010 Residential (Private)  
**STRANGE HOUSE**  
Hugh Strange / Adriana Ferlauta

**LOCATION**  
London Borough of  
Lewisham

**HEIGHT / STOREYS**  
12 ft (3.7 m) / 1 storey

**CONSTRUCTION COST**  
£170,000

**ARCHITECT**  
Hugh Strange Architects

**STRUCTURAL ENGINEER**  
Price & Myers

**TIMBER ENGINEER**  
Eurban

**TIMBER CONTRACTOR**  
Eurban

**TIMBER MANUFACTURER**  
Schilliger Holz

**MAIN CONTRACTOR**  
Solmaz

**TIMBER VOLUME**  
800 ft<sup>3</sup> (22 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
1 week

**OVERALL CONSTRUCTION**  
30 weeks

**STRUCTURE TYPE**  
Pure CLT

**EMBODIED CARBON  
WITHIN TIMBER\***  
-13 tons (-12 tonnes) CO<sub>2</sub>e

**CLT FACT**  
CLT could be craned in  
over the existing walls


Situated within the brick walls of an old pub yard the two bedroom house and adjacent studio occupy the site extensively.

While only 830ft<sup>2</sup>, the house feels deceptively large with spaces stretching 10ft high and, 36ft long, enfilade rooms, and framed views. A narrow space between the house and perimeter wall links the inside and outside spaces.

The structure is formed of CLT panels that were craned over the existing wall and fixed into place over the period of just one week. White-washed and left exposed internally, the primary structure has a strong relationship with the secondary timber fit-out. Glass is sandwiched between exposed structural timber and hardwood frames to form windows. Internal doors are face-fixed to structural openings, and the kitchen, cupboards, seating and shelving units sit within recesses formed in the structural frame.

Every space has the same palette of simple materials: concrete floors, white-washed CLT walls and ceilings; dark hardwood windows, doors and furniture.

Fibre-cement panels envelope the building's exterior; their lightness and verticality relating to and contrasting with the weight and horizontality of the rough in-situ concrete base situated on top of the existing slab.

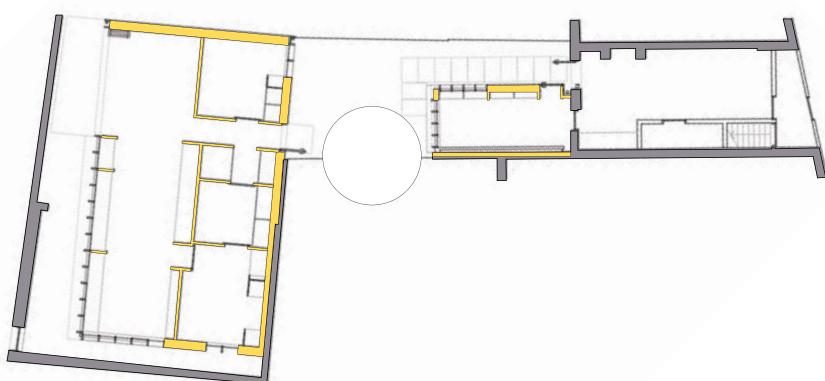

Ground Floor Plan



© James Morris

2010 Residential (Private)  
**WATSON HOUSE**  
 Private Client

**LOCATION**  
 Boldre, Hampshire

**HEIGHT / STOREYS**  
 13 - 17 ft (3.9 - 5.3 m) / 2 storeys

**CONSTRUCTION COST**  
 £640,000

**ARCHITECT**  
 John Pardey Architects

**STRUCTURAL ENGINEER**  
 Ramboll

**TIMBER ENGINEER**  
 KLH UK

**TIMBER CONTRACTOR**  
 KLH UK

**TIMBER MANUFACTURER**  
 KLH Massivholz

**MAIN CONTRACTOR**  
 NFTS

**TIMBER VOLUME**  
 3,500 ft<sup>3</sup> (99 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 1 week

**OVERALL CONSTRUCTION**  
 43 weeks

**STRUCTURE TYPE**  
 Hybrid


**EMBODIED CARBON  
WITHIN TIMBER\***  
 -63 tons (-58 tonnes) CO<sub>2</sub>e

**CLT FACT**  
 CLT used for continuation of  
 low-impact design

The house replaces a large suburban style two-storey house in a rural site within the New Forest. The design responds to both the client's desire to live in close contact with nature and the idea of making the house invisible from the public realm to deal with restrictive local planning policy.

This has resulted in a long, low pavilion that 'touches the earth lightly'. Orientated north-south the rectangular form provides three bedrooms that open up to the east and morning light. A large open-plan living-dining-kitchen area, and a master bedroom suite and study, open to the west with views into a pine copse. A brick chimney and hearth, built in Danish brick, anchors this delicate pavilion to the site.

The low-impact design is extended to the materials and systems used in its construction. The superstructure of the house is CLT, clad in a sweet chestnut timber façade. A ground-source heat pump, rainwater recycling and high levels of insulation further reduce the impact of the house on the environment.

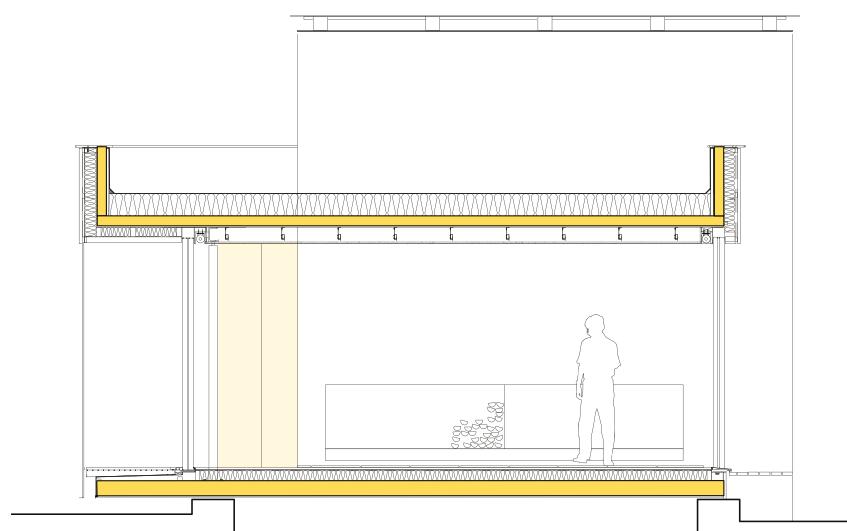



© Chris Wright for Living Architecture

2010 Residential (Private)

## DUNE HOUSE

Living Architecture

**LOCATION**

Thorpeness, Suffolk

**HEIGHT / STOREYS**

26 ft (7.8 m) / 2 storeys

**CONSTRUCTION COST**

Undisclosed

**ARCHITECT**

Jarmund Vigsnaes / Mole Architects

**STRUCTURAL ENGINEER**

engineersHRW (formerly Jane Wernick Associates)

**TIMBER ENGINEER**

Eurban

**TIMBER CONTRACTOR**

Eurban

**TIMBER MANUFACTURER**

Schilliger Holz

**MAIN CONTRACTOR**

Willow Builders

**TIMBER VOLUME**

2,100 ft<sup>3</sup> (60 m<sup>3</sup>)

**TIMBER ASSEMBLY**

1 week

**OVERALL CONSTRUCTION**

48 weeks

**STRUCTURE TYPE**

Hybrid

**EMBODIED CARBON  
WITHIN TIMBER\***

-38 tons (-35 tonnes) CO<sub>2</sub>

**CLT FACT**


CLT construction was unaffected by the strong North Sea winds

The house, designed for use as a holiday home, is situated on the Suffolk coast overlooking the sea. Relating to the typical British seaside strip of houses, the roofscape, with an eclectic range of pitches and dormer windows, brings to mind a romantic memory of holidays at bed and breakfasts while traveling through the UK.

The building is designed to be both a refuge against the North Sea, and a beach-side house open to the sandy dunes. The architecture of the ground floor is quite distinct from that of the upper storey. At ground level the open plan living area and terraces are set into the dunes which provide protection from the strong winds. Sliding doors at the corners bring the outside in, and the glazed walls allow for wide views and emphasize the floating appearance of the top floor.

While the materiality of the ground floor; concrete, glass and aluminum, relates to the mass of the ground, the upper floor, which houses four bedrooms, is a CLT construction exposed internally with dark cladding externally reminiscent of existing gables and sheds found within the area. The use of CLT facilitated the construction of the elaborate roof.

A striking and structurally complex house, the load of the upper floor is supported by a reinforced cantilevered concrete slab.

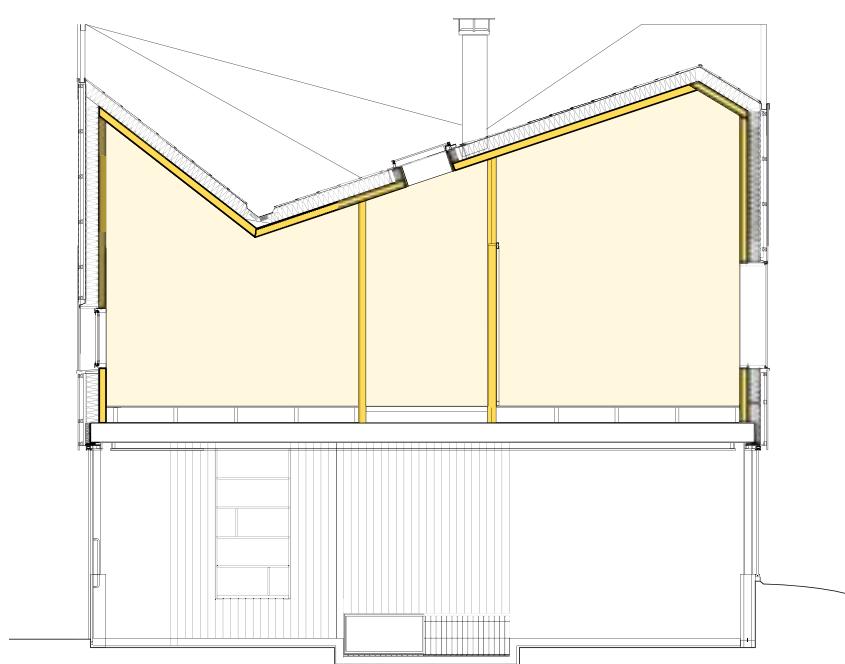

Section



© Ioana Marinescu



© Ioana Marinescu



© Karakusevic Carson Architects

2011      Residential  
**BRIDPORT HOUSE**  
Hackney Council

**LOCATION**  
London Borough of  
Hackney

**HEIGHT / STOREYS**  
84 ft (25.6 m) / 5-8 storeys

**CONSTRUCTION COST**  
£6 million

**ARCHITECT**  
Karakusevic Carson  
Architects

**STRUCTURAL ENGINEER**  
Peter Brett Associates

**TIMBER ENGINEER**  
Eurban

**TIMBER CONTRACTOR**  
Eurban

**TIMBER MANUFACTURER**  
Stora Enso

**MAIN CONTRACTOR**  
Willmott Dixon

**TIMBER VOLUME**  
55,700 ft<sup>3</sup> (1,576 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
12 weeks

**OVERALL CONSTRUCTION**  
56 weeks

**STRUCTURE TYPE**  
Pure CLT

**EMBODIED CARBON  
WITHIN TIMBER\***  
-988 tons (-896 tonnes) CO<sub>2</sub>


**CLT FACT**  
First multi storey building  
to use CLT from the  
ground up

Bridport House is the first phase of the wider Colville Estate Regeneration program which will replace 438 existing homes with over 900 new residences over approximately 20 years.


The building is designed as an eight and five storey urban block, on a narrow and constrained site, replacing a 1960s building that had turned its back on the street. The new Bridport House creates a street frontage onto the refurbished Shoreditch Park and starts to define the emerging street pattern of the masterplan.

One of London's main drainage tunnels runs directly underneath the building meaning that little extra weight could be exerted while the capacity of the block had to be doubled from 21 to 41 new homes. CLT offered a solution, the lightweight quality of timber allowing for twice as many units as the previous block to be built over the large Victorian sewer below. The structure was designed so that the load-bearing CLT panels are placed in a variety of positions on each floor, spreading the load.

The use of CLT for the structure also guaranteed the speed of construction which was essential to achieve the ambitious hand-over date to meet the Homes and Communities Agency's strict funding rules.

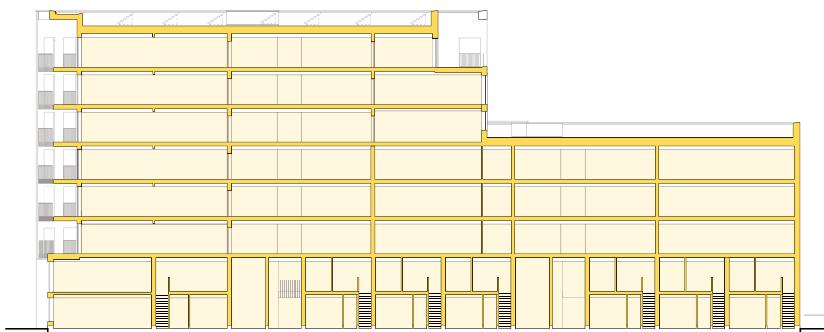

Section

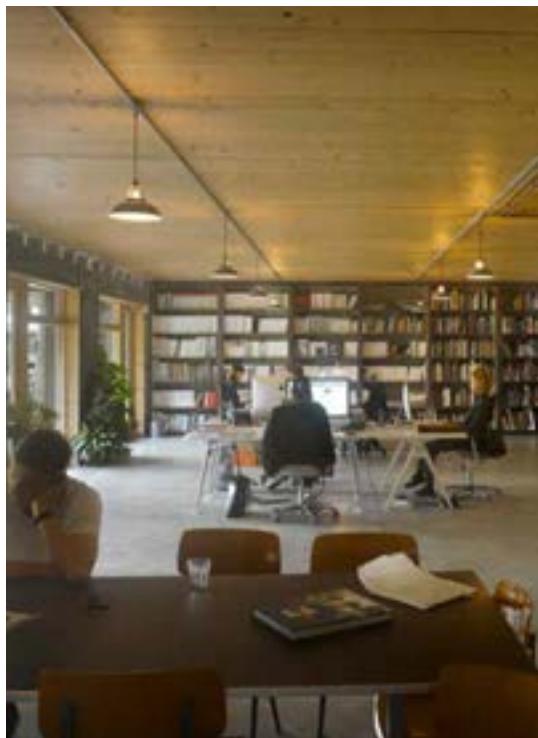

© Will Pryce

**LOCATION**  
 London Borough of Hackney

**HEIGHT / STOREYS**  
 67 ft (20.5 m) / 7 storeys

**CONSTRUCTION COST**  
 £2 million

**ARCHITECT**  
 Waugh Thistleton Architects

**STRUCTURAL ENGINEER**  
 Akera Engineers

**TIMBER ENGINEER**  
 KLH UK

**TIMBER CONTRACTOR**  
 KLH UK

**TIMBER MANUFACTURER**  
 KLH Massivholz

**MAIN CONTRACTOR**  
 Jerram Falkus

**TIMBER VOLUME**  
 17,600 ft<sup>3</sup> (499 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 5 weeks

**OVERALL CONSTRUCTION**  
 104 weeks

**STRUCTURE TYPE**  
 Pure Timber

**EMBODIED CARBON  
 WITHIN TIMBER\***  
 -310 tons (-281 tonnes) CO<sub>2</sub>e


**CLT FACT**  
 Timber walls between the flats act as giant trusses above the studio

This mixed use building is located adjacent to the Whitmore Road Bridge over Regent's Canal. It provides the four-client co-operative with two floors of office space, a double-height photographic studio and three triplex apartments at the top of the building that open onto generous roof terraces overlooking the canal.

CLT was the obvious structural solution for this tight urban site. The building footprint extends over almost the entire site area, bounded on two sides by buildings, and a third by the canal. It was craned into place directly from the street in only 5 weeks.

The CLT structure sits on a concrete lower ground floor which acts as a plinth. At the centre of the building, the double height studio spans 30ft and stretches to 79ft of open column-free space. This was achieved using the party walls above the space as deep beams and the north and south façades as giant trusses. Glulam beams on the north façade help spread the loads down this elevation and minimize deflection.

The building is clad in British sweet chestnut, a material traditionally used to clad barns. It is a robust, stable timber which is lightweight, strong and durable. It is less prone to movement, distortion or splitting than other timber species. Similar in color to oak, it has weathered to a natural silver color over time.

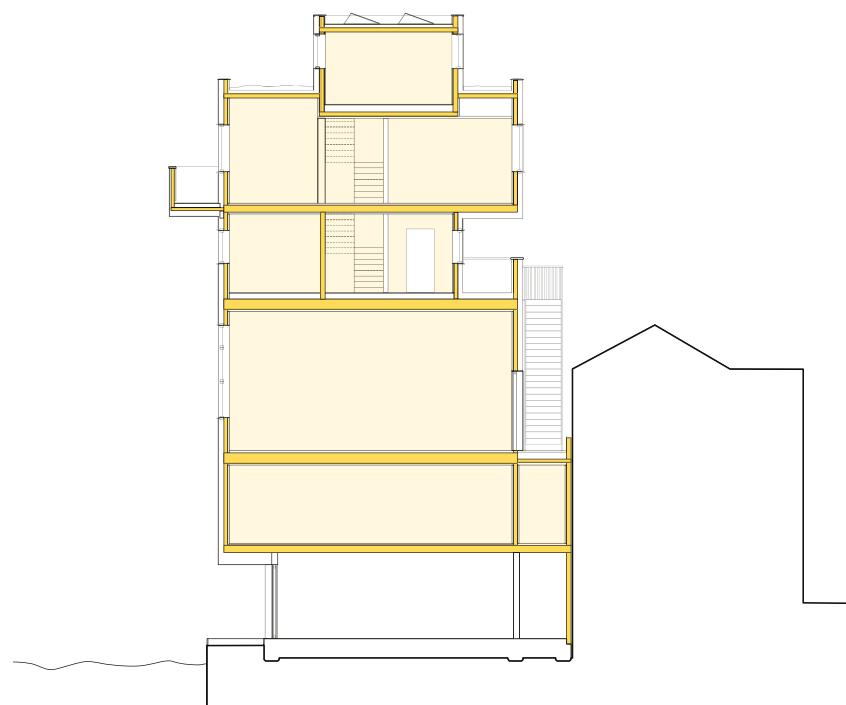

Section



© Alex de Rijke / dRMM

2013 Residential (Private)  
**WOODBLOCK HOUSE**  
Richard Woods & Jess Spanyol

**LOCATION**  
London Borough of Tower Hamlets

**HEIGHT / STOREYS**  
39 ft (12 m) / 3 storeys

**CONSTRUCTION COST**  
Undisclosed

**ARCHITECT**  
dRMM

**STRUCTURAL ENGINEER**  
Timber First

**TIMBER ENGINEER**  
Timber First/Züblin  
Timber

**TIMBER CONTRACTOR**  
Züblin Timber (formerly  
Finnforest Merk)

**TIMBER MANUFACTURER**  
Züblin Timber (formerly  
Finnforest Merk)

**MAIN CONTRACTOR**  
Cape Construction

**TIMBER VOLUME**  
4,300 ft<sup>3</sup> (121 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
2 weeks

**OVERALL CONSTRUCTION**  
34 weeks

**STRUCTURE TYPE**  
Pure CLT


**EMBODIED CARBON  
WITHIN TIMBER\***  
-76 tons (-69 tonnes) CO<sub>2</sub>

**CLT FACT**  
One of the first all timber houses built in central London since the 1666 Great Fire

Artist Richard Woods approached dRMM with the desire to create a studio, office and home for his family entirely out of wood. Collaboration between the architect and client has resulted in a simple design with both the aesthetic and structural materiality of the house defined by timber.

The house is formed of two cuboid structures resting atop one another. A large workshop and printing studio space occupy the ground floor at a north-facing incline, with separate south-facing living accommodation stacked above. To demarcate the public and private spaces of the building, the studio is clad in unpainted, vertically aligned larch, whilst the south-facing home on the upper floors is identified by horizontal strips of painted plywood. Woods' signature cartoon-esque, brightly-painted wood textile print is used on the plywood façade, and to adorn the internal staircase that extends through the central elevation. These bright, primary hues create a striking contrast with the interior finish of exposed CLT.

Both client and architect were attracted to timber due to its environmental credentials and aesthetic characteristics. Nestled between its neighboring buildings of brick and concrete, Woodblock House demonstrates the potential of CLT infill within an urban residential setting.

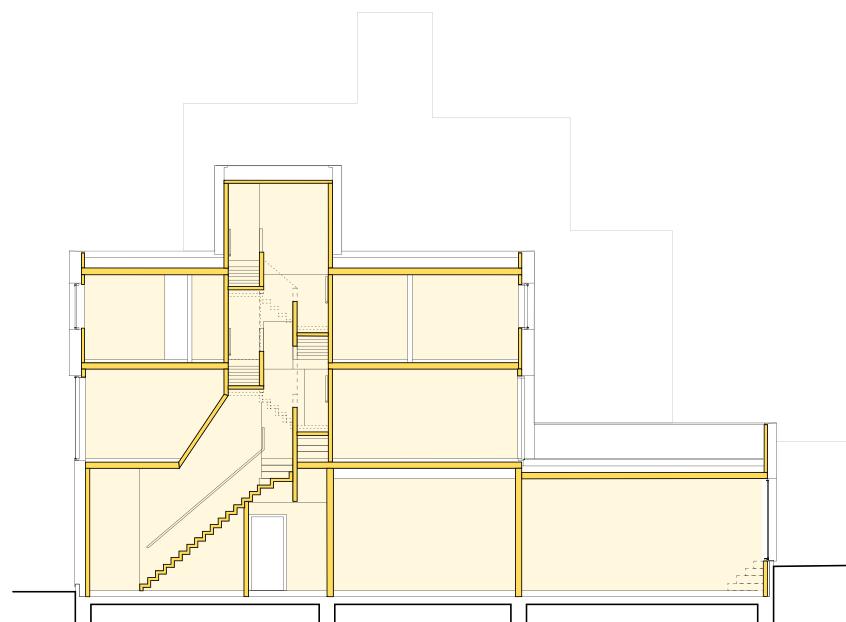

Section



© Paul Riddle

2013 Residential (Private)  
**SUSSEX HOUSE**  
 Private Client

**LOCATION**  
 South Downs, Sussex

**HEIGHT / STOREYS**  
 21 ft (6.5 m) / 2 storeys

**CONSTRUCTION COST**  
 Undisclosed

**ARCHITECT**  
 Wilkinson King

**STRUCTURAL ENGINEER**  
 Packman Lucas

**TIMBER ENGINEER**  
 Pryce & Myers / KLH UK

**TIMBER CONTRACTOR**  
 KLH UK

**TIMBER MANUFACTURER**  
 KLH Massivholz

**MAIN CONTRACTOR**  
 Westridge Construction

**TIMBER VOLUME**  
 2,300 ft<sup>3</sup> (65 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 2 weeks

**OVERALL CONSTRUCTION**  
 78 weeks

**STRUCTURE TYPE**  
 Hybrid

**EMBODIED CARBON  
WITHIN TIMBER\***  
 -39 tons (-36 tonnes) CO<sub>2</sub>e

**CLT FACT**  
 CLT chosen for ease  
 and low cost of forming  
 complex geometric roof


This house is inspired by its rural context and exceptional position overlooking the South Downs. The building is conceived as a series of layers, which echo the horizontality of the meadows and hills as they recede into the distance.


The ground floor is glazed giving panoramic views from the living spaces and can be fully opened up to access the external terraces. The first floor overhangs to provide summer shading. A double height reception space, with exposed CLT walls and ceiling, connects the two floors.

The first floor and roof are assembled from 143 CLT panels. The roof form is made from a series of tilted triangular planes, forming a folded, undulating surface mimicking the distant hills. CLT presented itself as the most structurally efficient and lowest cost option to achieve the spans required.

The internal timber surfaces are exposed bringing a warm, tactile quality to the bedrooms and circulation spaces and providing a harmony between the house and its environs.

The first floor is clad in cedar, weathering to match the color of the surrounding trees. Inline louvered shutters are concealed within the timber façade to prevent summer heat gain from the south facing windows.

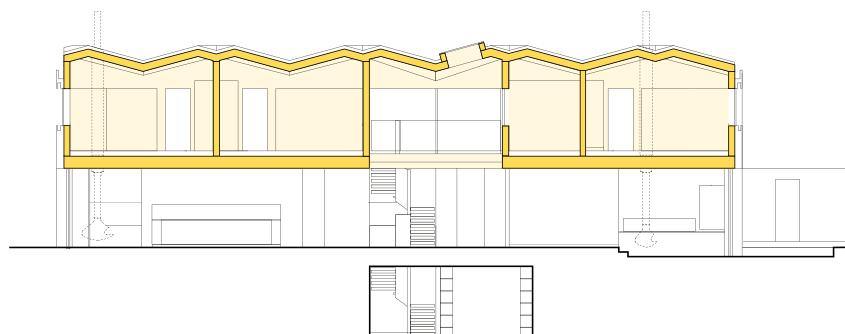

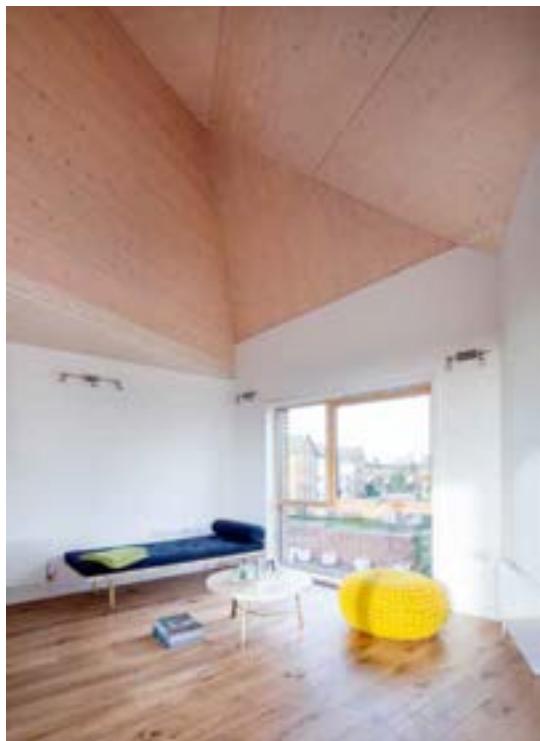

© Peter Guenzel

**LOCATION**  
London Borough of Redbridge

**HEIGHT / STOREYS**  
35 ft (10.8 m) / 4 storeys

**CONSTRUCTION COST**  
Undisclosed

**ARCHITECT**  
Arboreal Architecture

**STRUCTURAL ENGINEER**  
Structure Workshop

**TIMBER ENGINEER**  
KLH UK

**TIMBER CONTRACTOR**  
KLH UK

**TIMBER MANUFACTURER**  
KLH Massivholz

**MAIN CONTRACTOR**  
Hutton Group

**TIMBER VOLUME**  
8,500 ft<sup>3</sup> (242 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
5.5 weeks

**OVERALL CONSTRUCTION**  
53 weeks

**STRUCTURE TYPE**  
Pure CLT


**EMBODIED CARBON WITHIN TIMBER\***  
-149 tons (-135 tonnes) CO<sub>2</sub>

**CLT FACT**  
Digital fabrication allowed for non-orthogonal geometries

Mazarin House is a block of 6 two-bedroom flats in Woodford, East London. The local area comprises detached 1930s homes and 1970s blocks of flats. In response to this mixed urban setting the building was designed as a hybrid between a block of flats and a detached townhouse. This was achieved by combining the density of a block of flats with the massing and proportions of a detached house. The width of the front façade was matched to the adjacent houses and the roof profile echoed the double-bay fronted properties nearby. Four storeys of accommodation were built on a site where only three had previously been possible, whilst the mass of the building was sculpted to respond to allow light and views to reach neighbors.

To optimize the available space, light and views a non-orthogonal geometry was used. Without the restriction of designing only in right angles the building could respond more sensitively to its constraints. All 6 flats achieved south-facing, double-height living spaces and generous balconies.

The non-orthogonal design was made possible by the CLT construction system. The CLT panels form the walls, floors and roof and were cut by computer numerical control (CNC) directly from a 3D computer model. This digital fabrication allowed the many complex angles to be easily constructed on site from a precise kit of parts.

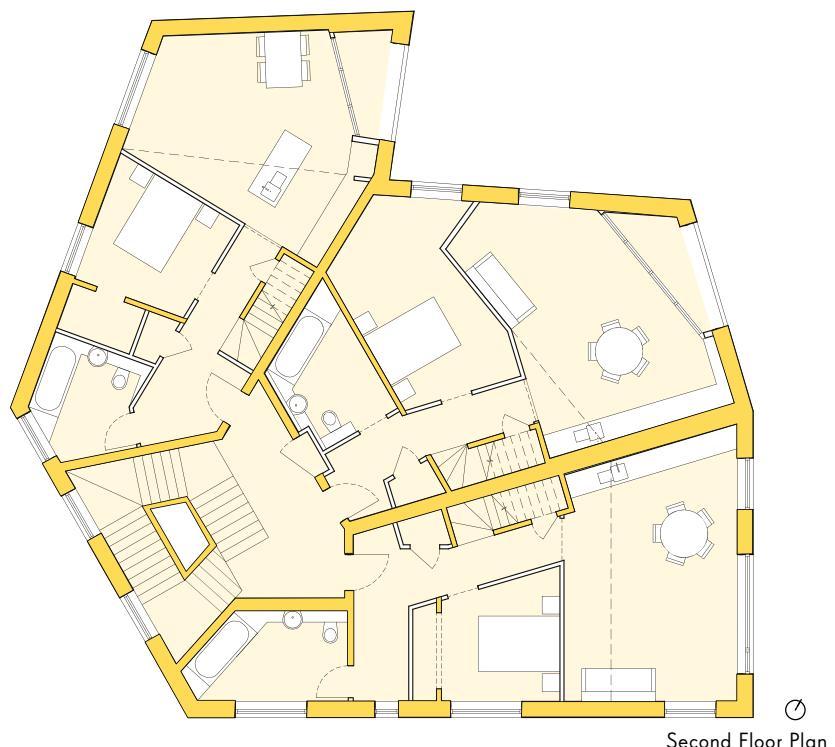



© David Grindley Architects

**LOCATION**  
 Milton Keynes,  
 Buckinghamshire

**HEIGHT / STOREYS**  
 10 ft (3.2 m) / 1 storey

**CONSTRUCTION COST**  
 £150,000

**ARCHITECT**  
 David Grindley  
 Architects

**STRUCTURAL ENGINEER**  
 KMG Tapsell Wade

**TIMBER ENGINEER**  
 KMG Tapsell Wade

**TIMBER CONTRACTOR**  
 KLH UK

**TIMBER MANUFACTURER**  
 KLH Massivholz

**MAIN CONTRACTOR**  
 Richard Lyons

**TIMBER VOLUME**  
 1,000 ft<sup>3</sup> (29 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 3 days

**OVERALL CONSTRUCTION**  
 52 weeks

**STRUCTURE TYPE**  
 Pure CLT

**EMBODIED CARBON  
 WITHIN TIMBER\***  
 -17 tons (-16 tonnes) CO<sub>2</sub>e


**CLT FACT**  
 Client inspired to use  
 CLT after seeing it at the  
 architect's offices

The scheme was conceived as an invisible building disguised as a site boundary adjacent to a listed thatched roof cottage. The new garden room and workshop is set in the curtilage of the Grade II listed Nurses Cottage in the Milton Keynes Village conservation area. Designed to respect the setting of the listed building, the new home was deliberately kept to a single storey with a low pitched green roof.

The building is comprised of two single-storey wings articulated in an 'L' shape courtyard arrangement. In conjunction with the existing cottage this plan forms a new private garden at its centre. The design is clearly articulated into its constituent elements: enclosure; floating roof and glazed colonnade.

The principal material used in the construction of the building is CLT, which is exposed internally and covered with a clear, white finish. The glazed clerestory between the roof and outer enclosing wall reflects light onto the exposed CLT roof panels.

Externally, the building is clad in heat-treated timber weather boarding with an aluminium coping. A planted sedum roof provides thermal mass and attenuation to storm water, while heat is provided via a ground-source pump.

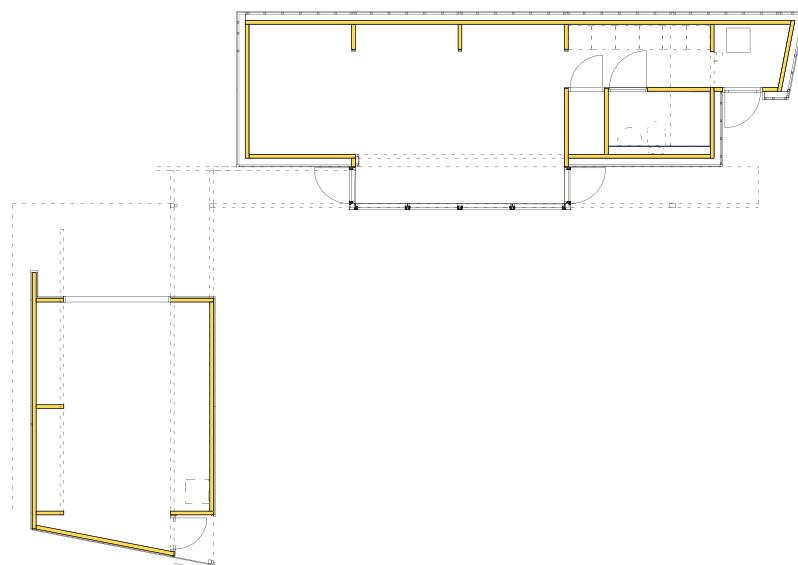

Ground Floor Plan



© Dennis Gilbert



© Mark Polyblank



© Dennis Gilbert

2014

Residential

## KINGSGATE HOUSE

De Vere Gardens / Catalyst Housing

**LOCATION**

Royal Borough of  
Kensington & Chelsea

**HEIGHT / STOREYS**

75 ft (23 m) / 7 storeys

**CONSTRUCTION COST**

£9.6 million

**ARCHITECT**

Horden Cherry Lee  
Architects

**STRUCTURAL ENGINEER**

Price & Myers

**TIMBER ENGINEER**

KLH UK

**TIMBER CONTRACTOR**

KLH UK

**TIMBER MANUFACTURER**

KLH Massivholz

**MAIN CONTRACTOR**

Willmott Dixon

**TIMBER VOLUME**

38,600 ft<sup>3</sup> (1,092 m<sup>3</sup>)

**TIMBER ASSEMBLY**

12 weeks

**OVERALL CONSTRUCTION**

78 weeks

**STRUCTURE TYPE**

Pure CLT

**EMBODIED CARBON  
WITHIN TIMBER\***

679 tons (-616 tonnes) CO<sub>2</sub>e

**CLT FACT**


First major building to be  
PEFC certified

Kingsgate House is a modern design for affordable housing that integrates its sustainable and environmental responsibilities into the architecture. The building provides 43 new homes on a prominent site in Kensington.

The design form, proportions and column spacing were established from careful analysis of the local historic context, a conservation area made up largely of stuccoed Victorian estates.

The façade is formed of vertically integrated solar shutters that respond to orientation and provide privacy for residents. The multi-toned, phosphorescent green of the PVC cells recalls the colors of the surrounding trees. Behind the shutters each apartment has its own recessed balcony, which provide external space that is not exposed to the heavy traffic on the adjacent main road. Energy created by the PV panels is fed back into the grid.

Selected for its environmental credentials, the use of CLT in this project enabled the reuse of existing foundations on site due to the reduction in weight as compared to a traditional structure, saving time and money. Kingsgate House was the first major building project to be PEFC certified demonstrating that all the timber used was both sustainable and ethically sourced.

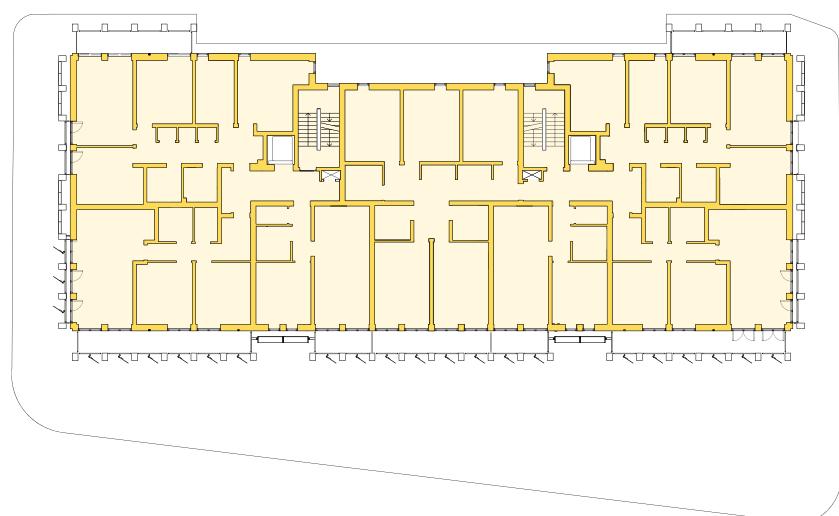

Typical Floor Plan in Context





© Jack Hobhouse

**LOCATION**  
 London Borough of  
 Hackney

**HEIGHT / STOREYS**  
 110 ft (33.5 m) / 10 storeys

**CONSTRUCTION COST**  
 £10.5 million

**ARCHITECT**  
 Hawkins\Brown

**STRUCTURAL ENGINEER**  
 Pringuer-James

**TIMBER ENGINEER**  
 Engenuiti

**TIMBER CONTRACTOR**  
 B & K Structures

**TIMBER MANUFACTURER**  
 Binderholz

**MAIN CONTRACTOR**  
 Eurobuild Properties

**TIMBER VOLUME**  
 46,400 ft<sup>3</sup> (1,313 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 30 weeks

**OVERALL CONSTRUCTION**  
 108 weeks

**STRUCTURE TYPE**  
 Hybrid

**EMBODIED CARBON  
 WITHIN TIMBER\***  
 -788 tons (-715 tonnes) CO<sub>2</sub>e

**CLT FACT**  
 Hackney's timber first  
 initiative encouraged  
 investigation into CLT

Wenlock Cross alters the traditional housing block to provide each apartment with daylight, beautiful views and external space on a tight urban site.

The twisted cruciform plan creates four elevations with direct visual connections to the City of London. The irregular, skewed cruciform ensures that all apartments have dual or triple aspect views with generous terraces, good natural ventilation, and avoids views to interior courtyards or lightwells. The angular plan also reduces residents' perception of density from within the apartments. Surrounding the street-facing side of the block is a skeletal brick grid that gives the large external terraces a sense of privacy, and creates a striking silhouette when viewed from the street.

A hybrid CLT and steel structure proved to be the most efficient way to realize this unique 10-storey building and uses the inherent strengths of each material to rationalize the main superstructure. The CLT elevations are clad in slatted western red cedar, whilst along the Wenlock Road elevation, a dark brick screen completes the street elevation making reference to the light industrial character of the conservation area.

Hackney Council's Timber First agenda encouraged the choice of CLT as the structural solution for this scheme. Upon its completion, Wenlock Cross was the tallest hybrid CLT building in the UK.



Second Floor Plan



© Tim Soar

**LOCATION**  
 London Borough of Hackney

**HEIGHT / STOREYS**  
 59 ft (18 m) / 5 storeys

**CONSTRUCTION COST**  
 £1.27 million

**ARCHITECT**  
 Groupwork + Amin Taha

**STRUCTURAL ENGINEER**  
 Webb Yates Engineers

**TIMBER ENGINEER**  
 EgoIn

**TIMBER CONTRACTOR**  
 EgoIn

**TIMBER MANUFACTURER**  
 EgoIn

**MAIN CONTRACTOR**  
 Ecore Construction

**TIMBER VOLUME**  
 8,800 ft<sup>3</sup> (250 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 2 weeks

**OVERALL CONSTRUCTION**  
 52 weeks

**STRUCTURE TYPE**  
 Pure CLT

**EMBODIED CARBON  
 WITHIN TIMBER\***  
 -158 tons (-144 tonnes) CO<sub>2</sub>


**CLT FACT**  
 £30,000 saving per flat

Accommodating six flats on a site between a Victorian Terrace and Edwardian School, the scheme echoes both the tall gables of the school and standalone villa typology of the terrace. The six-storey structure is made of load-bearing CLT panels, spanning up to 20ft. The roof is also solid CLT panels, carefully balanced against each other to create an open loft space within a traditionally pitched roof.


By positioning all services and build-ups on top of the floor slab, it has been possible to expose the CLT structure on all internal walls and ceilings allowing the material finish to provide the domestic character of the spaces. In addition to exposing its planar surface the cut edge is also left visible in order to describe its own make-up, structural depth and to reinforce if not reassure that the timber wall and ceiling finishes are not an effect.

Insulation with vapour barrier and protecting sheeting are applied to the outside face before a self-supporting brick rain-screen completes the exterior thermal and protective overcoat.

Using CLT as structure and finish removed the need for plasterboarded walls, suspended ceilings, cornices, skirtings, tiling and paint; reducing by 15% the embodied carbon of the building, and saving approximately £30,000 per flat.

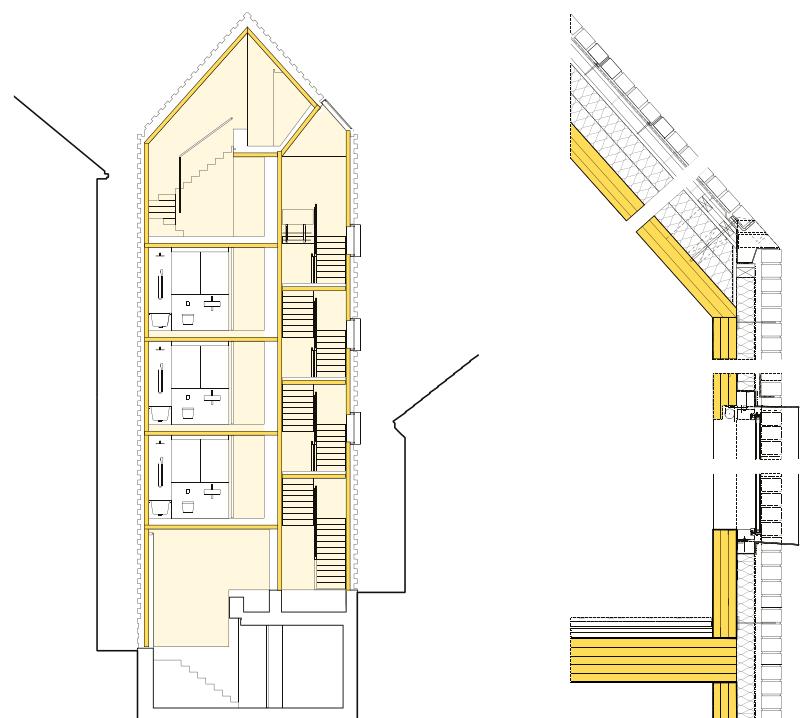

Section and Detail

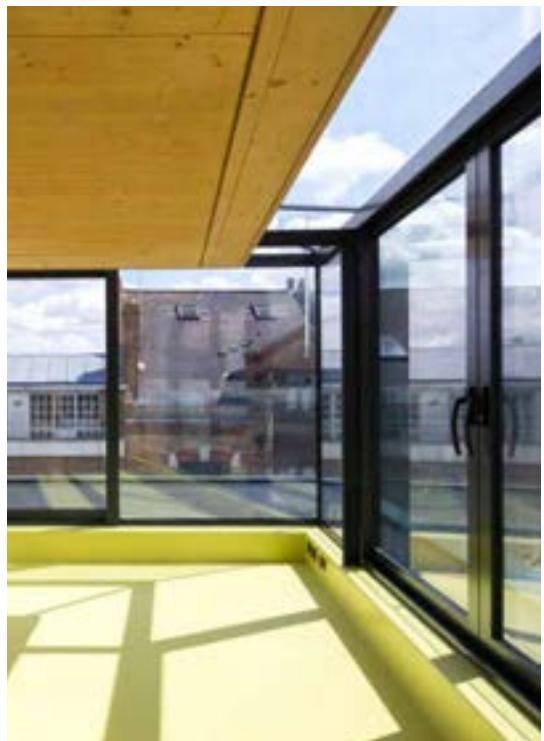

© Agnese Sanvito

2015      Residential (Private)  
**142 BERMONDSEY STREET**  
 Private Client

**LOCATION**  
 London Borough of Southwark

**HEIGHT / STOREYS**  
 39 ft (12 m) / 4 storeys

**CONSTRUCTION COST**  
 Undisclosed

**ARCHITECT**  
 Hampson Williams

**STRUCTURAL ENGINEER**  
 Webb Yates

**TIMBER ENGINEER**  
 Eurban

**TIMBER CONTRACTOR**  
 Eurban

**TIMBER MANUFACTURER**  
 Stora Enso

**MAIN CONTRACTOR**  
 Cityline Construction

**TIMBER VOLUME**  
 1,900 ft<sup>3</sup> (55 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 2 weeks

**OVERALL CONSTRUCTION**  
 52 weeks

**STRUCTURE TYPE**  
 Pure CLT

**EMBODIED CARBON  
WITHIN TIMBER\***  
 -35 tons (-31 tonnes) CO<sub>2</sub>


**CLT FACT**  
 Lightweight material  
 eliminated need for  
 additional foundations

Hampson Williams were commissioned to refurbish and extend the client's existing home: a post-war building located in the Bermondsey Street Conservation area, providing a mix of residential, commercial and mixed use units. The concept was to create a bookend to the adjacent Georgian terrace, wrapping the form around the corner. Using the existing building as a starting point, large windows were introduced giving open views across the White Cube courtyard and providing south-facing sunlight.

Externally there is a simple, industrial-style box formed of planes with robust materials and clean lines retaining the white rendered aesthetic of the existing building as a base material. Large windows, placed at irregular intervals across the exterior, are defined by thick, black borders creating a striking street front façade.

These clean lines and industrial materials are continued internally with the exposed CLT timber structure bringing a softer residential feel and adding warmth to the spaces.

CLT was selected primarily to reduce costs – the lightweight material not requiring additional foundations. The speed of construction also lent itself to this tight urban site, limiting road closures and storage of materials on site.

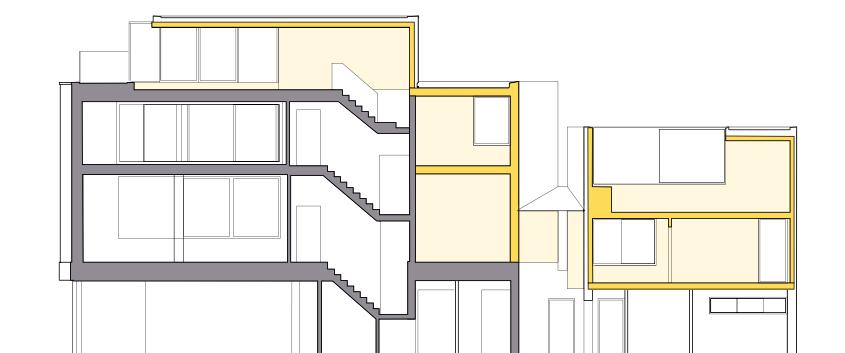



© Alex de Rijke / dRMM

**LOCATION**  
London Borough of Southwark

**HEIGHT / STOREYS**  
118 ft (36 m) / 4 - 10 storeys

**CONSTRUCTION COST**  
Undisclosed

**ARCHITECT**  
dRMM

**STRUCTURAL ENGINEER**  
Robert Bird Group

**TIMBER ENGINEER**  
Eurban

**TIMBER CONTRACTOR**  
Eurban

**TIMBER MANUFACTURER**  
Stora Enso

**MAIN CONTRACTOR**  
Lendlease

**TIMBER VOLUME**  
26,500 ft<sup>3</sup> (750 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
6 weeks

**OVERALL CONSTRUCTION**  
78 weeks

**STRUCTURE TYPE**  
Pure CLT

**EMBODIED CARBON WITHIN TIMBER\***  
-467 tons (-424 tonnes) CO<sub>2</sub>e


**CLT FACT**  
Building CLT alongside traditional methods can reduce the benefits

Elephant and Castle suffered huge damage during WWII. The buildings that went up in the 1960s were often of poor quality; their huge structures created a place that found it hard to adapt and grow. The masterplan for the redevelopment of the Heygate Estate aims to restore this area to its former glory as a thriving, desirable place to live and visit.

Trafalgar Place is the first phase of this redevelopment and comprises 235 homes. Steering away from the alienating size of previous buildings the scheme provides variety through scale, with a mixture of mini-towers, apartment blocks and townhouses. Each apartment has been designed from the inside out, maximizing light and space, and all have either a garden, balcony or roof terrace.

Conceived as an opportunity for the client to test CLT as a long-term solution to building housing within the UK market, the two timber blocks are constructed principally of CLT, comprising CLT stair and lift shafts for stability and load-bearing façade and internal party walls. Load-bearing partition walls within apartments were avoided, with 21ft spans typically achieved allowing for future flexibility.

Whilst the quantum of timber is not the most significant, this project is a step-change in the delivery of large residential housing schemes.

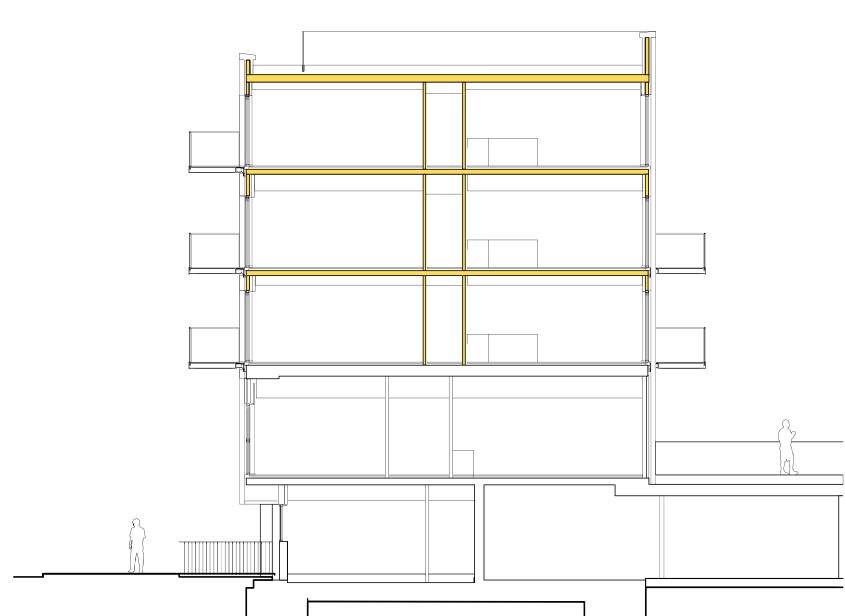



© Tim Soar

2015

Residential  
**COBALT PLACE**

Lendlease

**LOCATION**  
London Borough of  
Wandsworth

**HEIGHT / STOREYS**  
63 ft (19.3 m) / 6 storeys

**CONSTRUCTION COST**  
£13 million

**ARCHITECT**  
Allford Hall Monaghan  
Morris

**STRUCTURAL ENGINEER**  
Walsh Associates

**TIMBER ENGINEER**  
Eurban

**TIMBER CONTRACTOR**  
Eurban

**TIMBER MANUFACTURER**  
Stora Enso

**MAIN CONTRACTOR**  
Lendlease

**TIMBER VOLUME**  
90,900 ft<sup>3</sup> (2,575 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
12 weeks

**OVERALL CONSTRUCTION**  
69 weeks

**STRUCTURE TYPE**  
Pure Timber

**EMBODIED CARBON  
WITHIN TIMBER\***  
-1,607 tons (-1,458 tonnes) CO<sub>2</sub>


**CLT FACT**  
Client request to change  
from concrete to CLT

Cobalt Place is an enabling scheme, part funding a new school on the wider masterplan on the former Salesian College site. The scheme comprises 102 apartments split across two 5-6 storey buildings and two separate townhouses. The buildings are arranged to form a residential quarter with a central courtyard, opening up new views to the neighboring Sacred Heart church and increasing both visual and physical permeability.

The blocks are faced with two types of brick which recalls the Victorian houses of the surrounding area. Each storey is expressed with stack bond banding to add both a finer grain and improved legibility to the elevations.

Internally, communal areas are defined by expanses of exposed fair-faced timber panels, revealing the structure as an aesthetic element, bringing natural warmth to the contemporary design of the new homes.

Initially designed as a concrete framed scheme, the decision to change the scheme to CLT was driven by the client. Chosen for its sound structural properties, construction efficiency and low environmental impact, the CLT structure is one part of the client's wider sustainability agenda.

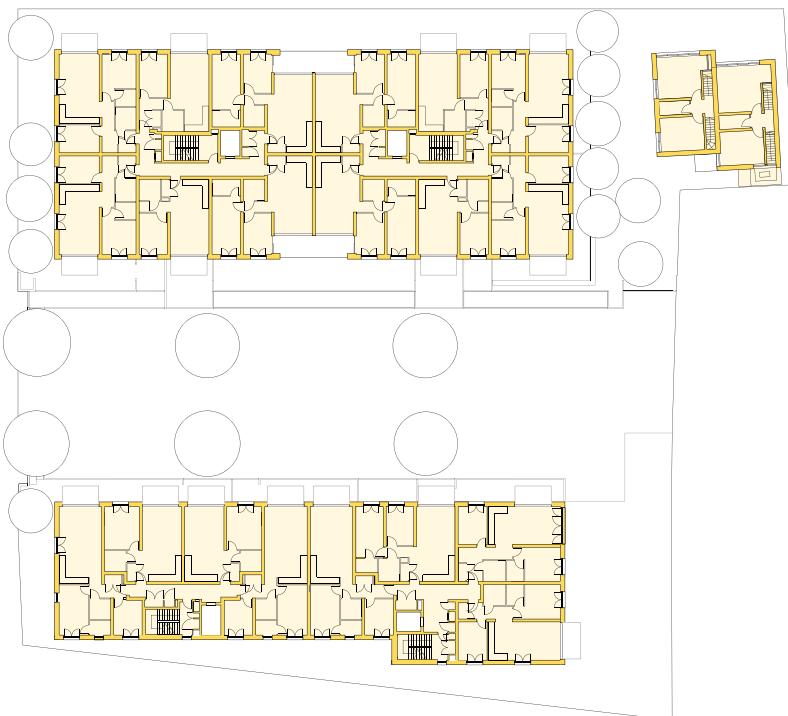

First Floor Plan in Context





© Peter Cook

**LOCATION**  
 Oxford, Oxfordshire

**HEIGHT / STOREYS**  
 42 ft (12.8 m) / 3 storeys

**CONSTRUCTION COST**  
 £4.5 million

**ARCHITECT**  
 Hodder + Partners

**STRUCTURAL ENGINEER**  
 Thornton Tomasetti

**TIMBER ENGINEER**  
 Eurban

**TIMBER CONTRACTOR**  
 Eurban

**TIMBER MANUFACTURER**  
 Hasslacher

**MAIN CONTRACTOR**  
 Benfield and Loxley

**TIMBER VOLUME**  
 11,400 ft<sup>3</sup> (323 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 12 weeks


**OVERALL CONSTRUCTION**  
 66 weeks

This project comprises five individual buildings woven between existing mature trees, with a restored Grade II listed villa at its head. Linked by walkways the buildings create a quadrangle reminiscent of the traditional Oxford college layout.

The villa is flanked by a new warden's house, and a single storey timber lined arts studio. Opposite the villa is a pair of linked two and three storey buildings housing student accommodation. The quadrangle is completed to the south by another 'pavilion' of single and double study rooms.

All five buildings have a CLT structure and are clad with a rainscreen of vertical oak boards. The use of CLT lent itself to the cellular nature of study rooms which is expressed on the façades. The material language seeks to reinforce the notion of pavilions in a garden.

The naturally-ventilated art studio has an oak glulam portal frame which supports the CLT roof and wall panels. Glazed panels and doors between the glulam columns on the south side are protected from the strong sunlight by doors and an oak-clad CLT canopy cantilevers over the walkway, supported by the glulam columns. Continuing beyond the wall of the studio the canopy and the glulam columns create a cloister-like loggia which defines the north side of the quadrangle.

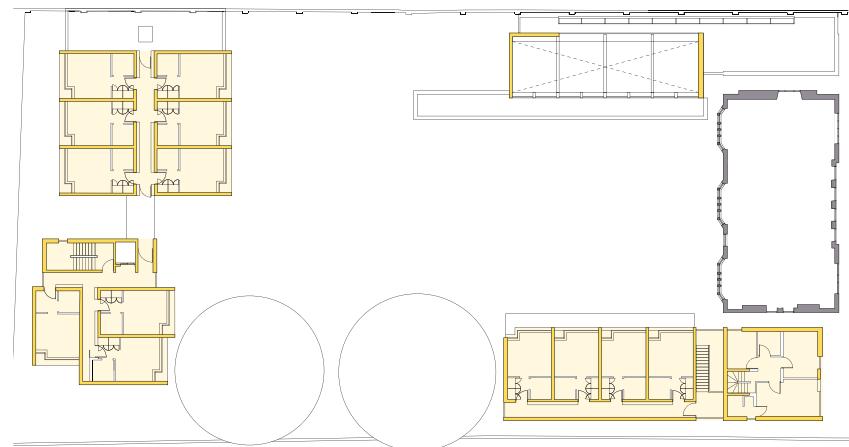

**STRUCTURE TYPE**  
 Pure CLT

**EMBODIED CARBON  
WITHIN TIMBER\***  
 -198 tons (-179 tonnes) CO<sub>2</sub>

**CLT FACT**  
 Proportions of the  
 study rooms suited CLT  
 perfectly





© Alex Sarginson



© Alex Sarginson



© Adrian Wolfson

2015      Residential (Private)  
**LANSDOWNE DRIVE PASSIVHAUS**  
 Bernard Tulkens

**LOCATION**  
 London Borough of  
 Hackney

**HEIGHT / STOREYS**  
 16 ft (4.9 m) / 2 storeys

**CONSTRUCTION COST**  
 £350,000

**ARCHITECT**  
 TECTONICS Architects

**STRUCTURAL ENGINEER**  
 Michael Hadi Associates

**TIMBER ENGINEER**  
 Eurban

**TIMBER CONTRACTOR**  
 Eurban

**TIMBER MANUFACTURER**  
 Hasslacher

**MAIN CONTRACTOR**  
 N/A

**TIMBER VOLUME**  
 900 ft<sup>3</sup> (25 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 2 days

**OVERALL CONSTRUCTION**  
 46 weeks

**STRUCTURE TYPE**  
 Pure CLT


**EMBODIED CARBON  
 WITHIN TIMBER\***  
 -15 tons (-14 tonnes) CO<sub>2</sub>e

**CLT FACT**  
 CLT helped towards  
 achieving Passivhaus  
 status



The building is located in a conservation area in East London on an infill garden site amidst four storey Victorian terraced houses. Sitting behind a garden wall along the street, the house is half sunken to remain discreet, a suggestion from the local planning department. From the street the house appears as a low, zinc-clad chamfered volume.

Responding to the context, the objective was to create a building with the generic simplicity, flexibility, light and character found in industrial spaces. The main construction components have been left exposed internally. The structural concrete of the lower ground floor roots the building, while the CLT panels which form the living spaces on the upper level sit alongside the conduits and ducts, providing a simple palette of materials and a very direct sense of the construction.

A modern space made using natural materials, with ultra-low energy requirements, the building was awarded Passivhaus status. It is the first certified Passivhaus in the UK to use CLT and woodfibre insulation construction.

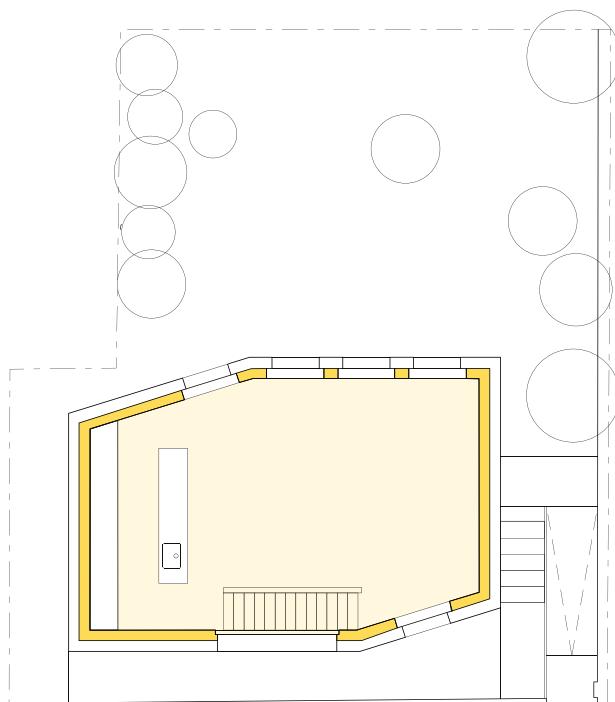

First Floor Plan

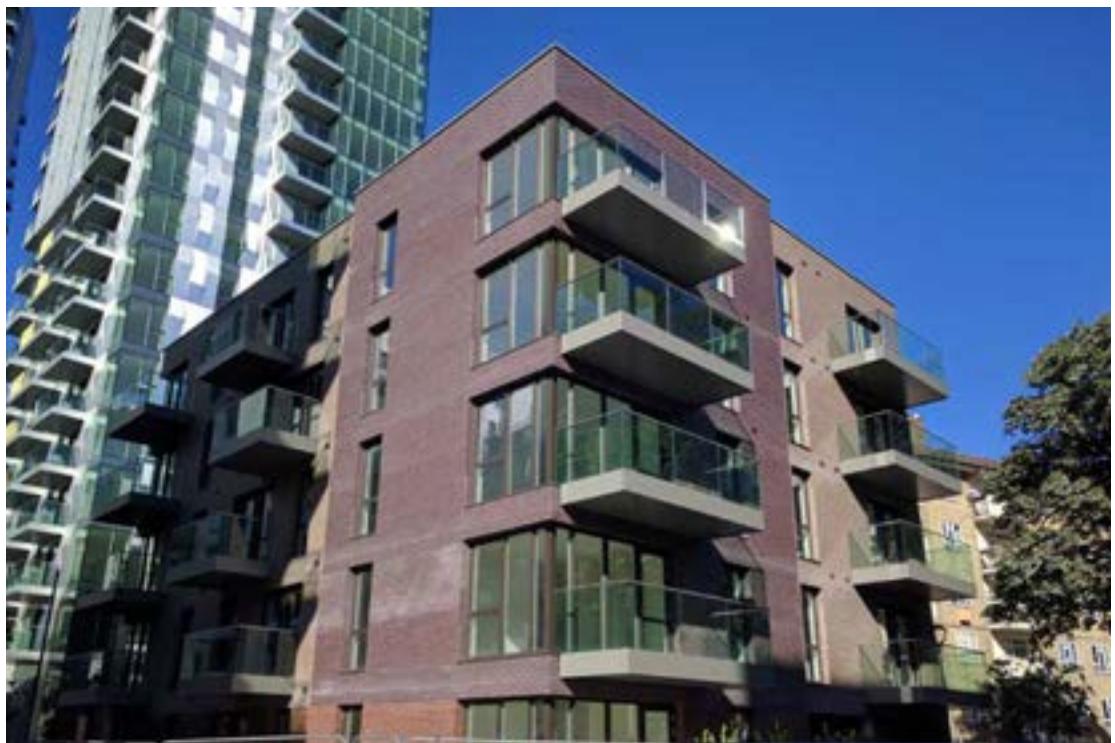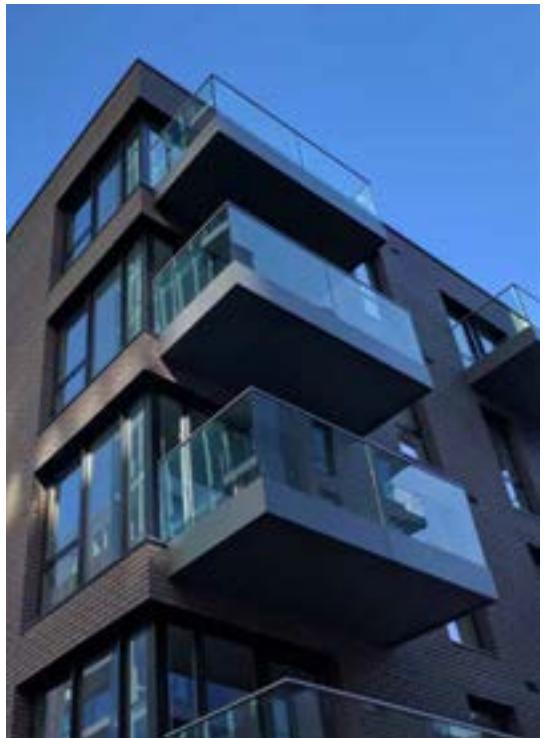

© Waugh Thistleton Architects

**LOCATION**  
 London Borough of Hackney

**HEIGHT / STOREYS**  
 51 ft (15.4 m) / 5 storeys

**CONSTRUCTION COST**  
 Undisclosed

**ARCHITECT**  
 Waugh Thistleton Architects

**STRUCTURAL ENGINEER**  
 Eurban

**TIMBER ENGINEER**  
 Eurban

**TIMBER CONTRACTOR**  
 Eurban

**TIMBER MANUFACTURER**  
 Stora Enso

**MAIN CONTRACTOR**  
 Berkeley Homes

**TIMBER VOLUME**  
 17,800 ft<sup>3</sup> (503 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 5.5 weeks

**OVERALL CONSTRUCTION**  
 39 weeks

**STRUCTURE TYPE**  
 Pure CLT


**EMBODIED CARBON WITHIN TIMBER\***  
 -313 tons (-284 tonnes) CO<sub>2</sub>

**CLT FACT**  
 CLT erected 6.5 weeks  
 quicker than the originally  
 planned concrete frame


The Woodberry Down Estate spans a total of 64 acres, next to the New River and West and East Reservoirs, which total 42 acres of open water, in an area of north-east London which is undergoing significant re-development. The process of demolishing 1,980 homes and rebuilding over 5,500 is scheduled across eight phases over a period of 20 years.

As the first CLT building within the estate development, this is the first venture into CLT construction for Berkeley Homes, one of the UK's largest house builders. The objective was to encourage the wider adoption of CLT construction in both the coming phases of the regeneration, and throughout Berkeley Homes' development portfolio.

Originally designed to be built using a reinforced concrete frame, the decision to change to a CLT structure came at a relatively late stage. Despite this, the layout of this five-storey building was able to remain largely unchanged with internal steel columns replacing the concrete columns to achieve the large openings for the corner windows. The thinner floor build up reduced the height by 3 inches per storey which in turn reduced the quantity of building materials used. The 19 homes were delivered ahead of schedule and achieved higher than anticipated thermal and air tightness performance.

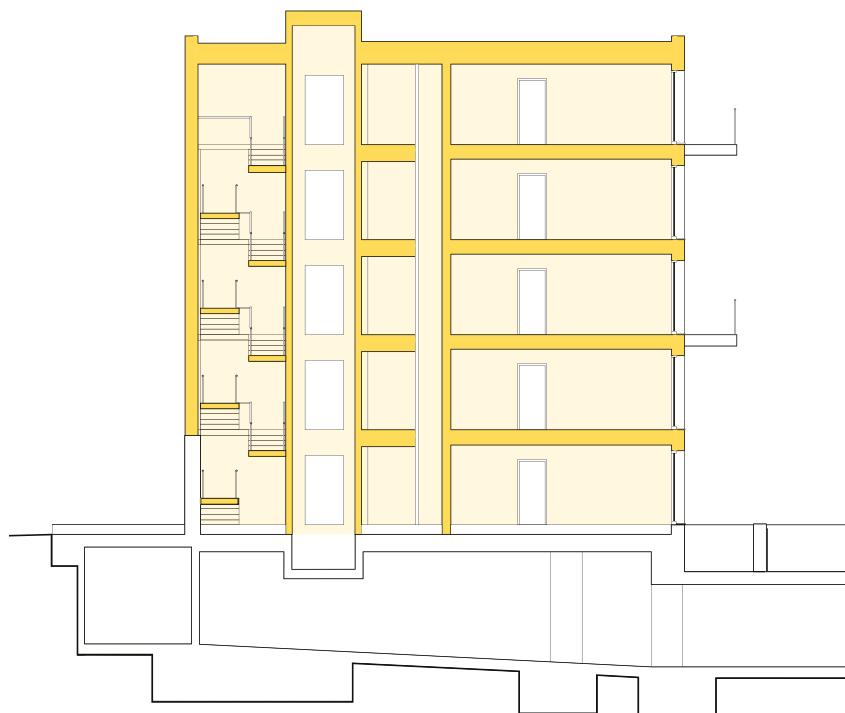

Section

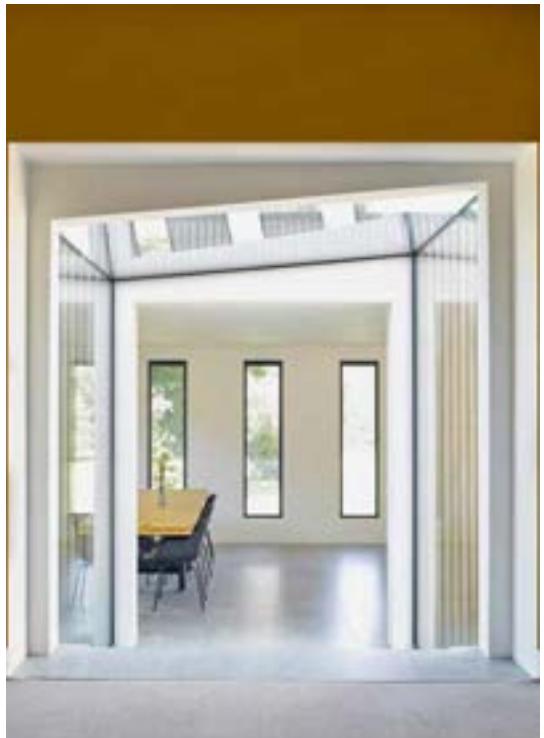

© James Morris

2016      Residential (Private)  
**HURDLE HOUSE**  
 Private Client

**LOCATION**  
 Alresford, Hampshire

**HEIGHT / STOREYS**  
 11 ft (3.5 m) / 1 storeys

**CONSTRUCTION COST**  
 £250,000

**ARCHITECT**  
 Adam Knibb Architects

**STRUCTURAL ENGINEER**  
 Eckersley O'Callaghan

**TIMBER ENGINEER**  
 KLH UK

**TIMBER CONTRACTOR**  
 KLH UK

**TIMBER MANUFACTURER**  
 KLH Massivholz

**MAIN CONTRACTOR**  
 Gregory Collins

**TIMBER VOLUME**  
 1,100 ft<sup>3</sup> (31 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 4 days

**OVERALL CONSTRUCTION**  
 20 weeks

**STRUCTURE TYPE**  
 Pure Timber


**EMBODIED CARBON  
WITHIN TIMBER\***  
 -19 tons (-17 tonnes) CO<sub>2</sub>e

**CLT FACT**  
 Timber chosen to tie  
 in with landscape and  
 reduce waste on site

Hurdle House is a Grade II listed barn, constructed in the mid eighteenth-century. The house has a north-south axis with an extensive rear garden and expansive views to the north. The building receives sunlight throughout the day and is overlooked only by the surrounding trees and fields. The contemporary extension aims to provide a social heart to the house harnessing the fantastic views not allowed by the original building.

Set at a 90-degree angle to the original house, a frameless glass space lightly connects the old with the new. Rethinking the movement from public to private areas, the extension uses visual barriers rather than physical blockades to demarcate the spaces that comprise large open plan kitchen, dining area, casual seating and study. Large glass apertures blur the boundaries between the natural surroundings of the property and the interior spaces and the new entrance arrives in the heart of this space, providing direct views into the garden.

Timber was the central component of the project, determining the scale, form and openings and tying the materiality of the building to the expansive landscape that surrounded the existing property. Vertical timber cladding mimics the surrounding trees and provides a contemporary contrast to the existing building.

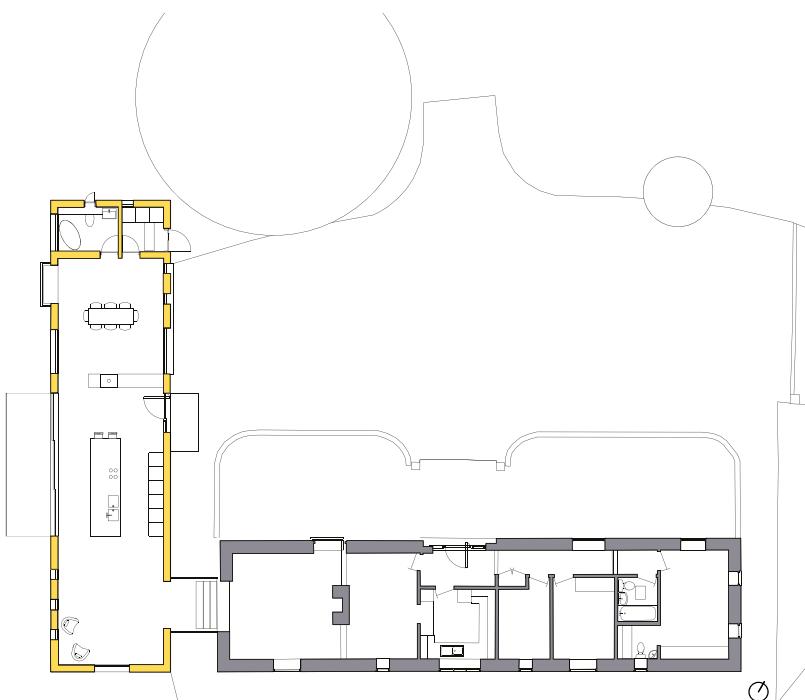

Ground Floor Plan



© Johan Dehlin

2016 Residential (Education)

## COWAN COURT

Churchill College

**LOCATION**  
Cambridge,  
Cambridgeshire

**HEIGHT / STOREYS**  
33 ft (10 m) / 3 storeys

**CONSTRUCTION COST**  
£9.22 million

**ARCHITECT**  
6a Architects

**STRUCTURAL ENGINEER**  
Pryce & Myers

**TIMBER ENGINEER**  
Engenuiti

**TIMBER CONTRACTOR**  
B & K Structures

**TIMBER MANUFACTURER**  
Binderholz /  
Rubner Holzbau

**MAIN CONTRACTOR**  
SDC

**TIMBER VOLUME**  
11,100 ft<sup>3</sup> (314 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
14 weeks

**OVERALL CONSTRUCTION**  
77 weeks

**STRUCTURE TYPE**  
Pure Timber


**EMBODIED CARBON  
WITHIN TIMBER\***  
-191 tons (-173 tonnes) CO<sub>2</sub>e

**CLT FACT**  
Engineered timber  
structure chosen for  
sustainability credentials


Cowan Court is a 68-room hall of residence and the first completely new court since the college was founded as a memorial to Sir Winston Churchill in the early 1960s. This new court, adjacent to the existing accommodation courts, turns the Brutalism of the original buildings towards the 21st century bringing sustainability, accessibility, landscape and a new approach to communal and private space to the heart of the design.

Cowan Court responds to the original in a contemporary timber construction. In three overhanging floors, the jettying timber cuts recall the concrete bands across the façades of the existing courts. Each of the façades is curved like the entasis of a classical column, and the square windows of the student rooms spiral up and across.

The structure of the building consists of a glulam post and beam frame with CLT floor panels. Each wing is braced by full height CLT or concrete shear walls, with the concrete walls restricted to the two cores. The glulam beams remain exposed in most areas, giving a rhythm and natural depth to the interior. The materiality forms part of an ambitious environmental strategy; passive ventilation, triple glazing and super insulation reduced the amount of energy consumed in construction and in use. Solar electricity and rainwater collection reduce the energy requirements yet further.

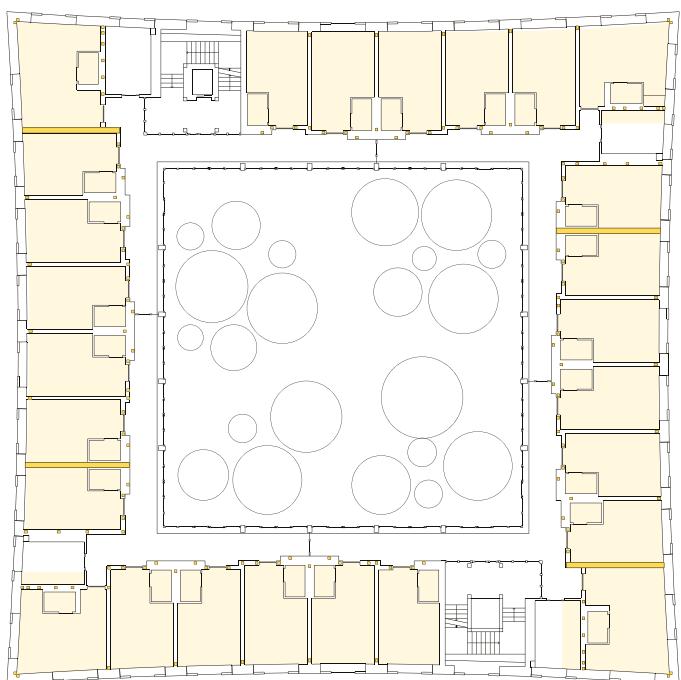

First Floor Plan

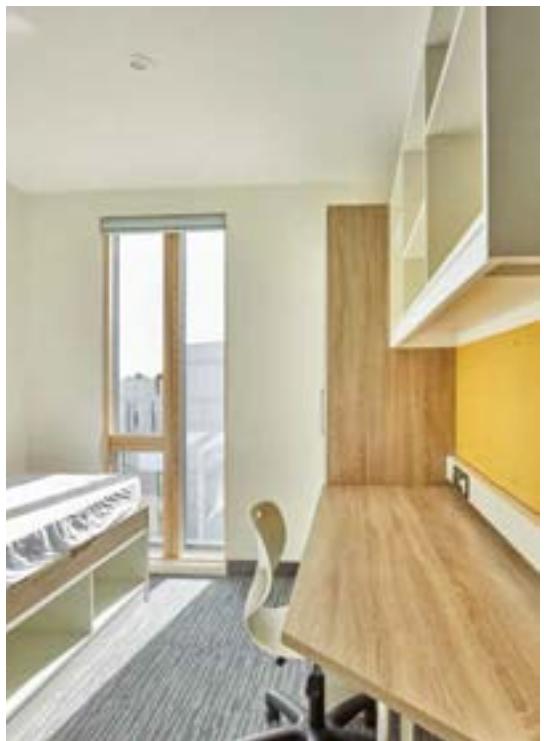

© Richard Osbourne

2016 Residential (Education)  
**UEA BLACKDALE**  
University of East Anglia

**LOCATION**  
Norwich, Norfolk

**HEIGHT / STOREYS**  
71 ft (21.7 m) / 5 storeys

**CONSTRUCTION COST**  
£27.5 million

**ARCHITECT**  
LSI Architects

**STRUCTURAL ENGINEER**  
Ramboll

**TIMBER ENGINEER**  
Ramboll

**TIMBER CONTRACTOR**  
KLH UK

**TIMBER MANUFACTURER**  
KLH Massivholz

**MAIN CONTRACTOR**  
R G Carter

**TIMBER VOLUME**  
128,200 ft<sup>3</sup> (3,930 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
17 weeks

**OVERALL CONSTRUCTION**  
62 weeks

**STRUCTURE TYPE**  
Pure CLT

**EMBODIED CARBON  
WITHIN TIMBER\***  
-2,242 tons (-2,034 tonnes) CO<sub>2</sub>

**CLT FACT**  
Use of CLT was in line  
with the University's  
environmental policy

Set over two blocks this new residential quarter for the university provides 514 new student rooms. The design for both student accommodation blocks, named Hickling House and Barton House, takes inspiration from the distinctive shapes of the 1960s Denys Lasdun Teaching Wall.

The Blackdale student accommodation is a gateway into the university campus. Blocks are clad with pale grey panels, chosen to complement the concrete structures of the original campus, with gold accent cladding on key views. Angled windows project from the façade to obscure views from outside, adding visual interest and a means to channelling light into the building.

The use of CLT was key in supporting the university's environmental policies and reduced the embodied carbon of the construction. It also enabled the tight program to be met with students moving in for the autumn semester.



First Floor Plan in Context



© Tim Crocker

2017      Residential  
**BACTON LOW RISE (PHASE 1)**  
 Camden Council

**LOCATION**  
 London Borough of  
 Camden

**HEIGHT / STOREYS**  
 57 ft (17.5 m) / 5 storeys

**CONSTRUCTION COST**  
 £18 million

**ARCHITECT**  
 Karakusevic Carson  
 Architects

**STRUCTURAL ENGINEER**  
 Roltons

**TIMBER ENGINEER**  
 Eurban

**TIMBER CONTRACTOR**  
 Eurban

**TIMBER MANUFACTURER**  
 Stora Enso

**MAIN CONTRACTOR**  
 Rydon

**TIMBER VOLUME**  
 60,800 ft<sup>3</sup> (1,72 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 Block A - 8 weeks  
 Block B - 10 weeks

**OVERALL CONSTRUCTION**  
 90 weeks

**STRUCTURE TYPE**  
 Hybrid

**EMBODIED CARBON  
 WITHIN TIMBER\***  
 -1,077 tons (-977 tonnes) CO<sub>2</sub>e


**CLT FACT**  
 The light weight reduced  
 number of piles and  
 enabled a complex site

This community-led regeneration project focuses on the transformation of a 1960s estate into a new community of homes for new and existing residents; reconnecting the new neighborhood with the local community.


The 294 unit masterplan achieved planning in March 2013. The first phase started construction in March 2014 and by November 2015 all existing residents had moved into their new homes.

The first phase provided a decant site: a narrow triangle of land next to a high-speed trainline with severe noise and vibration constraints. To counteract this a physical buffer of townhouses and stacked maisonettes was built along the railway. The use of CLT enabled the construction to mitigate the acoustic and vibration impact from the trains, which was very efficient compared to traditional RC frame construction.

Initially concerned that specifying CLT would narrow the field of contractors and reduce the competitive tender, the client's perception was swiftly overcome by the benefits of using CLT on a tight urban site. The frame was quick to install and was slotted and bolted together with very low levels of noise and dust. Fewer piles were required, resulting in less noise and lowering costs. Reduced deliveries meant that the site could run more efficiently and had less impact on the local community.

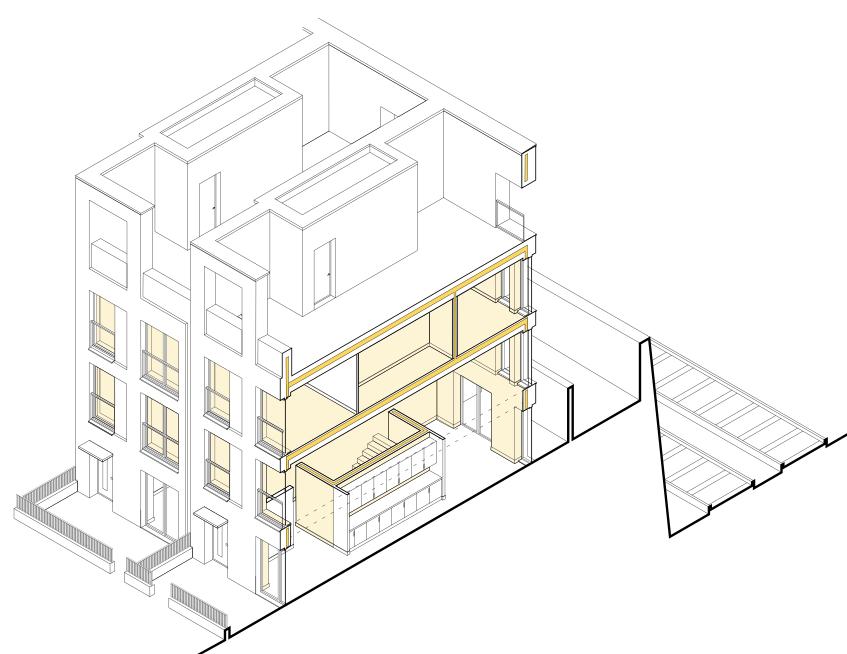

Townhouse Sectional Axonometric

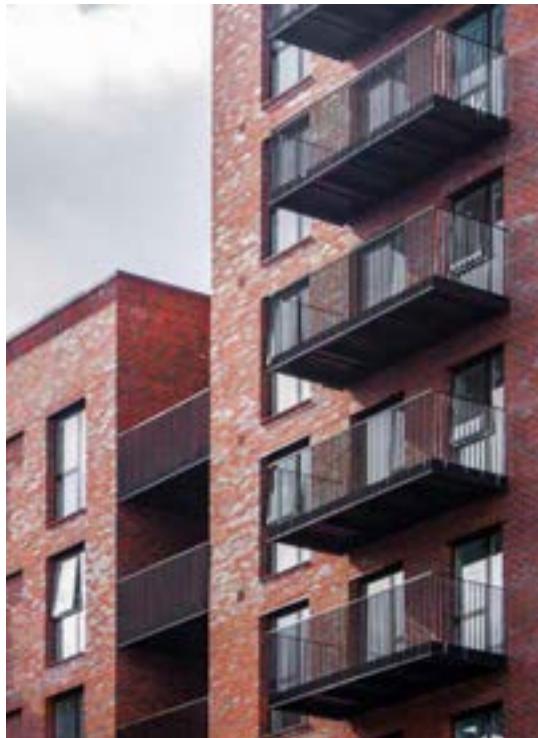

© Waugh Thistleton



© Daniel Shearling



© Daniel Shearling

2017      Residential  
**DALSTON WORKS**  
 Regal London

**LOCATION**  
 London Borough of  
 Hackney

**HEIGHT / STOREYS**  
 111 ft (33.8 m) / 10 storeys

**CONSTRUCTION COST**  
 Undisclosed

**ARCHITECT**  
 Waugh Thistleton  
 Architects

**STRUCTURAL ENGINEER**  
 PJC

**TIMBER ENGINEER**  
 Ramboll

**TIMBER CONTRACTOR**  
 B & K Structures

**TIMBER MANUFACTURER**  
 Binderholz

**MAIN CONTRACTOR**  
 Regal Homes

**TIMBER VOLUME**  
 164,200 ft<sup>3</sup> (4,649 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 52 weeks

**OVERALL CONSTRUCTION**  
 130 weeks

**STRUCTURE TYPE**  
 Pure CLT

**EMBODIED CARBON  
 WITHIN TIMBER\***  
 -2,878 tons (-2,611 tonnes) CO<sub>2</sub>e


**CLT FACT**  
 Delivers 35 more homes  
 than would be possible  
 with a concrete frame

Dalston Works is the world's largest CLT building, delivering 121 new affordable and private (for rent) homes alongside 38,000ft<sup>2</sup> of commercial space.

Designed as a village within a city, the plan is modulated to break down the large site into discernible volumes, orientated to maximize daylight to courtyards and living spaces. A public courtyard activates the existing streetscape, while a second courtyard offers a private, secluded space for residents. The building's intricate brickwork references the surrounding Victorian and Edwardian housing and the detailing of local warehouses, providing a contemporary addition to the local streetscape.

Conceived of and built in solid timber, Dalston Works showcases how CLT can help deliver high-quality, high-density housing without compromising the environment. Constrained by the future Crossrail 2 train line that runs under the site, the CLT weighs a fifth of a comparable concrete structure. This reduced weight combined with the minimal raft foundation enabled the creation of 35 additional homes than would have been otherwise possible in concrete frame.

Rising to 10 storeys at its highest, the CLT structure uses the equivalent of 2,325 trees - around three trees per person living or working in the building.

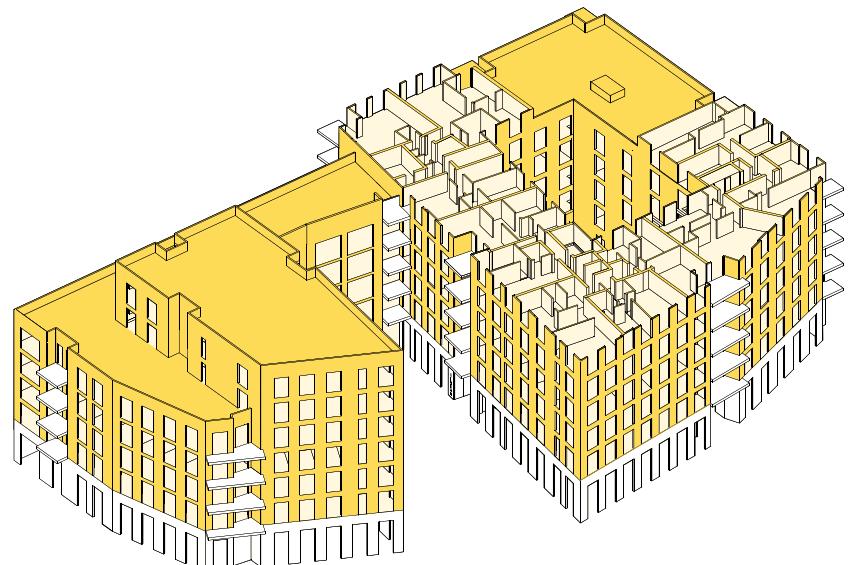

Sectional Axonometric of CLT



© Mosley and Mann

2017 Residential (Private)  
**CARMARTHEN HOUSE**  
Amanda & Robert Mosley

**LOCATION**  
London Borough of Southwark

**HEIGHT / STOREYS**  
21 ft (6.5 m) / 2 storeys

**CONSTRUCTION COST**  
£310,000

**ARCHITECT**  
Mosley and Mann

**STRUCTURAL ENGINEER**  
Built Engineers / EgoIn

**TIMBER ENGINEER**  
EgoIn

**TIMBER CONTRACTOR**  
EgoIn

**TIMBER MANUFACTURER**  
EgoIn

**MAIN CONTRACTOR**  
Build-Met

**TIMBER VOLUME**  
2,800 ft<sup>3</sup> (80 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
2 days

**OVERALL CONSTRUCTION**  
56 weeks

**STRUCTURE TYPE**  
Pure CLT

**EMBODIED CARBON  
WITHIN TIMBER\***  
-49 tons (-45 tonnes) CO<sub>2</sub>e


**CLT FACT**  
CLT chosen due to  
access constraints

Located at the boundary of the Bermondsey Street Conservation Area, the density was key to the decision to design a "flat pack" house which could be craned and assembled in minimal time.

Prior to this project in 2006, at a time when CLT was very much in its infancy in the UK, the practice had built two award-winning solid timber buildings adjacent to the site. The panels for these two schemes were not CLT but more akin to exceptionally deep glulam beams. At the time the architects worked to overcome local resident's and building control's concerns about mass timber construction.

Permission was granted for the new project and access through the neighboring private estate agreed on the basis that a quick and quiet build time could be ensured; the success of the previous schemes acting as precedent to this.

The CLT structure of Carmarthen House took just 2 days to secure in place. All exposed internally, the timber provides a natural breathable environment with a beautiful finish. The selection of CLT for the structure enabled the interesting design features of the house to be executed easily.

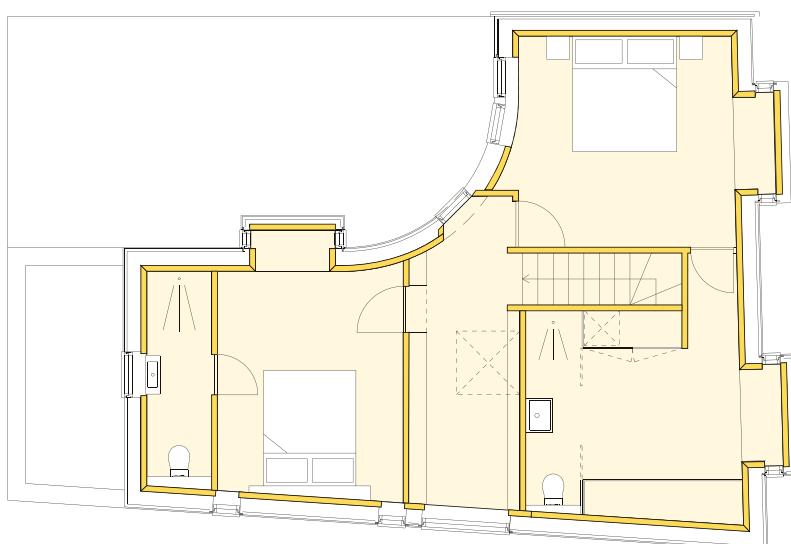

First Floor Plan



© Lewis Kahn

2018 Residential (Cinema)  
**PITFIELD STREET**  
Garfwise Ltd

**LOCATION**  
London Borough of  
Hackney

**HEIGHT / STOREYS**  
61 ft (18.5 m) / 6 storeys

**CONSTRUCTION COST**  
£9.4 million

**ARCHITECT**  
Waugh Thistleton  
Architects

**STRUCTURAL ENGINEER**  
Elliott Wood

**TIMBER ENGINEER**  
Pryce & Myers./ KLH UK

**TIMBER CONTRACTOR**  
KLH UK

**TIMBER MANUFACTURER**  
KLH Massivholz

**MAIN CONTRACTOR**  
Simply Construct

**TIMBER VOLUME**  
18,800 ft<sup>3</sup> (533 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
12 weeks

**OVERALL CONSTRUCTION**  
96 weeks

**STRUCTURE TYPE**  
Hybrid

**EMBODIED CARBON  
WITHIN TIMBER\***  
-332 tons (-301 tonnes) CO<sub>2</sub>e

**CLT FACT**  
Using CLT allowed an  
extra storey due to savings  
in floor to floor heights

Pitfield Cinema combines the restoration of a derelict, turn of the 20th century neighborhood cinema with the development of new commercial and residential accommodation, comprising 18 luxury apartments.

The design consists of two distinct elements, a solid concrete basement and ground level, which accommodates the three-screen cinema, and a CLT element from first floor podium level to form the apartments. The timber element is stepped back from the street to provide balconies behind the historic façade. A single penthouse occupies the top floor enjoying panoramic urban views, with open plan living achieved through the use of wide spanning CLT members.

The challenge of building a cinema directly below living accommodation was achieved using 'box within-a-box' construction. The cinema is effectively isolated from the remainder of the structure. In this way, the CLT structure above is fixed onto a slab which is entirely independent of the cinema ceilings, and load paths are transferred to the foundations independently.

Constraints on the permissible height of the building were met through the use of CLT without compromising the internal room heights. The floor build-up, including underfloor heating, service voids and acoustic separation was under 16 inches thick, which is not achievable with other forms of construction.



Section



# COMMERCIAL

The commercial sector is currently an emerging market for CLT, its relative infancy indicated by the far fewer number of commercial projects included within this study. The use of CLT by companies such as Sky and more recently Google, for their new European headquarters currently starting on site in Kings Cross, illustrates the acceptance of CLT by influential leaders of the sector. It is expected that the breakthrough with these companies will lead to accelerated uptake within this sector.

Most commercial schemes require large open uninterrupted spaces that are flexible and adaptable. Hybrid structures, where CLT is used in combination with glulam, LVL or steel beams to create wider spans without excessively thick panels of CLT, are therefore common in commercial buildings.

In addition to these conventionally planned open offices, the case studies within this sector include several examples of renovations to existing offices where a rooftop extension in CLT has been possible. The potential for CLT to be used on top of existing schemes, often without the need for additional reinforcements to the existing foundations, can facilitate an increase in net internal area.

At least part of the timber structure is exposed in each of the commercial buildings included, as such it is clear to see that the aesthetic and environmental benefits of CLT are highly valued within this sector. The reasons for exposing the timber in these schemes are varied but include the first monolithic CLT project built in the UK, where the primary driver for exposing the CLT was its ability to regulate the internal humidity levels, essential for preservation of the artefacts stored within.

Image: Sky Believe in Better Building, Arup Associates © Simon Kennedy



© David Grindley Architects

2006      Commercial  
**THE OFFICE**  
 David Grindley Architects

**LOCATION**  
 Milton Keynes,  
 Buckinghamshire

**HEIGHT / STOREYS**  
 11 ft (3.5 m) / 1 storey

**CONSTRUCTION COST**  
 £75,000

**ARCHITECT**  
 David Grindley  
 Architects

**STRUCTURAL ENGINEER**  
 Tapsell Wade and  
 Partners

**TIMBER ENGINEER**  
 KLH UK

**TIMBER CONTRACTOR**  
 KLH UK

**TIMBER MANUFACTURER**  
 KLH Massivholz

**MAIN CONTRACTOR**  
 N/A

**TIMBER VOLUME**  
 500 ft<sup>3</sup> (14 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 2 days

**OVERALL CONSTRUCTION**  
 26 weeks

**STRUCTURE TYPE**  
 Pure CLT


**EMBODIED CARBON  
 WITHIN TIMBER\***  
 -7 tons (-7 tonnes) CO<sub>2</sub>

**CLT FACT**  
 Lightweight CLT reduces  
 impact on the roots of  
 surrounding trees

In the redesign and extension of their existing studio, David Grindley took the opportunity to place an emphasis on the use of sustainable materials and prefabrication. The building is constructed almost entirely of CLT which provides not only the structure but also the aesthetic language of the building.

The new studio is a linear, single storey, open-plan space with north facing, clerestory windows that bring natural light into the building. The interior is an open plan space divided into four distinct zones by solid timber panels cut to half the width of the room. The timber has been left exposed internally, diffusing the light from the north facing clerestory windows to create a serene and healthy working environment.

The façade is articulated by vertical timber boarding which continues onto the adjacent side of the pitched roof, and acts to obscure the horizontality of the building within its wooded context. This side of the building faces onto the neighboring green, its materiality sympathetic to and cohesive with the landscape. The lightweight timber lessens the impact on the roots of the mature trees which surround the site.

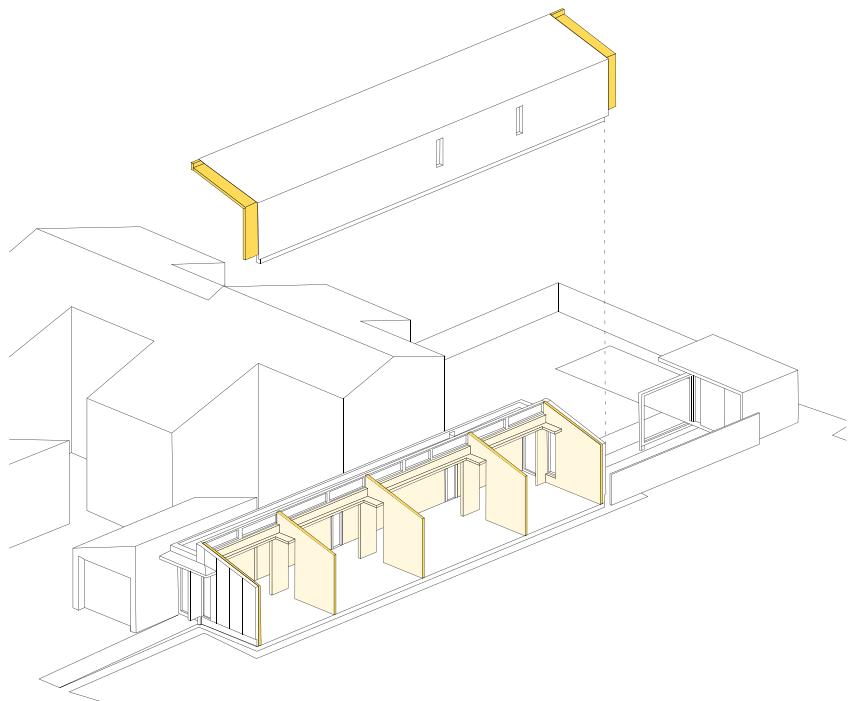

Axonometric



© David Grandorge

2006      Commercial  
**BEDFONT LAKES PAVILION**  
 Scottish Widows Investment Partnership

**LOCATION**  
 Feltham, Middlesex

**HEIGHT / STOREYS**  
 14 ft (4.3 m) / 1 storey

**CONSTRUCTION COST**  
 £400,000

**ARCHITECT**  
 Archer Architects

**STRUCTURAL ENGINEER**  
 Akera Engineers

**TIMBER ENGINEER**  
 Akera Engineers

**TIMBER CONTRACTOR**  
 KLH UK

**TIMBER MANUFACTURER**  
 KLH Massivholz

**MAIN CONTRACTOR**  
 Bryan and Langley

**TIMBER VOLUME**  
 3,500 ft<sup>3</sup> (100 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 1 week

**OVERALL CONSTRUCTION**  
 12 weeks

**STRUCTURE TYPE**  
 Hybrid


**EMBODIED CARBON  
WITHIN TIMBER\***  
 -62 tons (-57 tonnes) CO<sub>2</sub>e

**CLT FACT**  
 The use of CLT enabled construction on top of an existing car park


The Bedfont Lakes Pavilion was designed as a new social hub, café and management centre for the occupants of the neighboring buildings. The plot, located above an active car park and amidst occupied offices, required a solution which would have minimal impact on the site and the surrounding area.

A prefabricated building was the obvious answer. The simple single storey rectangular space was constructed using cross laminated timber. The complete panelized system was delivered to site pre-finished and erected within a short five day period. Being largely self-supporting, an essential feature for construction above the existing car park, the need for additional structure was minimized with the whole build taking only 12 weeks to complete.

One of the first CLT projects in the UK, this building demonstrated some of the benefits of CLT that are now considered common knowledge, with cost modelling of the project demonstrating that the unit cost of this form of construction was lower than conventional construction.

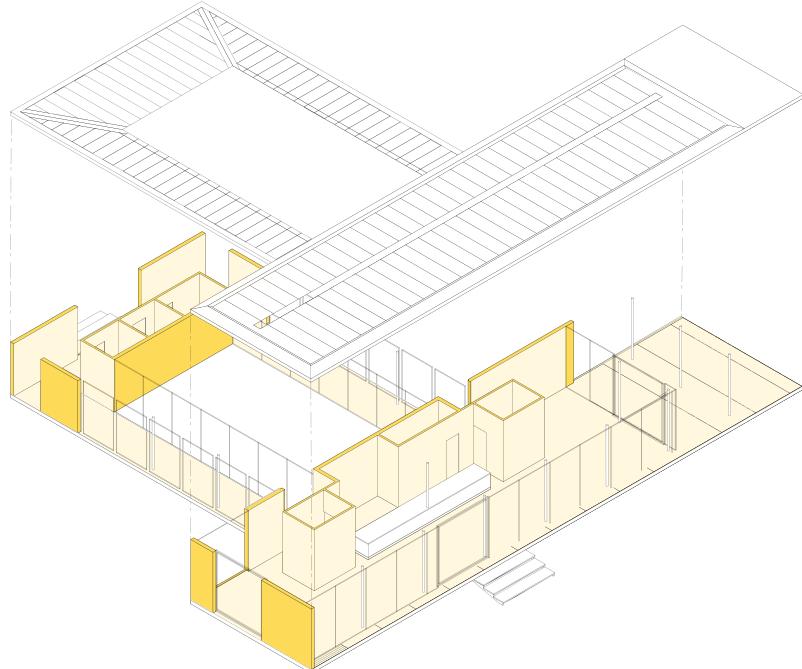

Exploded Axonometric

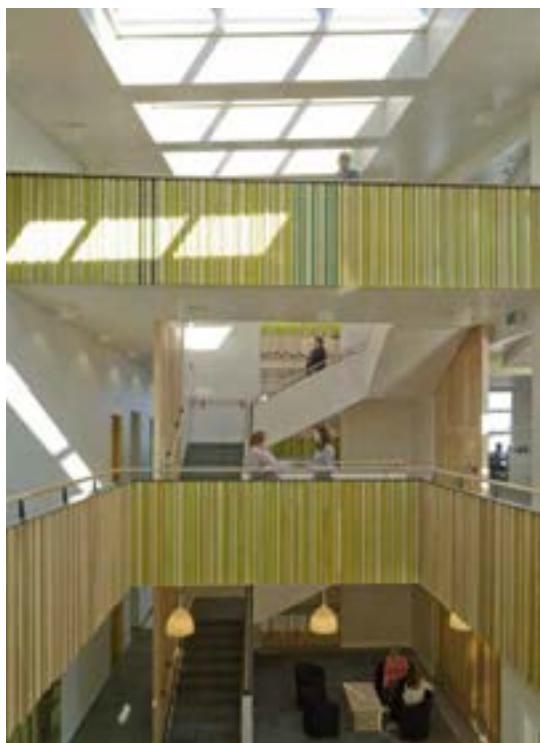

© Peter Cook / VIEW

2010 Commercial

## WOODLAND TRUST HEADQUARTERS

The Woodland Trust

**LOCATION**  
Grantham, Lincolnshire

**HEIGHT / STOREYS**  
49 ft (15 m) / 3 storeys

**CONSTRUCTION COST**  
£5 million

**ARCHITECT**  
Feilden Clegg Bradley  
Studios

**STRUCTURAL ENGINEER**  
Atelier One

**TIMBER ENGINEER**  
Atelier One

**TIMBER CONTRACTOR**  
B & K Structures

**TIMBER MANUFACTURER**  
KLH Massivholz

**MAIN CONTRACTOR**  
Bowmer & Kirkland

**TIMBER VOLUME**  
24,100 ft<sup>3</sup> (682 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
12 weeks

**OVERALL CONSTRUCTION**  
56 weeks

**STRUCTURE TYPE**  
Hybrid

**EMBODIED CARBON  
WITHIN TIMBER\***  
-424 tons (-385 tonnes) CO<sub>2</sub>e


**CLT FACT**  
Combination of CLT  
with 'concrete radiators'  
optimized thermal mass

Located on a greenfield site, the brief for the new headquarters was to create a woodland experience from the moment people arrive. Staff and visitors are welcomed through a central garden planted with birch trees, and the façade of the building is clad in larch giving a feeling of being amongst trees.

The building ascends in a spiral, creating a dynamic transition between the landscape and the building. The internal spaces are grouped around a top-lit atrium, which acts as both a reception area and a congregation space for the staff. Three storey vertical windows on the north and south elevations flood the interior with natural light and ventilation. CLT provides the structure, creating an incredibly light, breathable building that reflects the ethos of the charity through its very materiality.

To regulate the temperature of the building a series of 81 'concrete radiators' – concrete boxes fixed to the CLT soffits - work structurally in composite with the timber and were designed to provide sufficient thermal mass, absorbing and re-emitting heat from the offices through the night to create a naturally regulated comfortable internal temperature.

As a charity the Woodland Trust was keen to demonstrate value for money. A thorough cost comparison demonstrated that CLT offered a frugal solution whilst also meeting sustainability objectives.

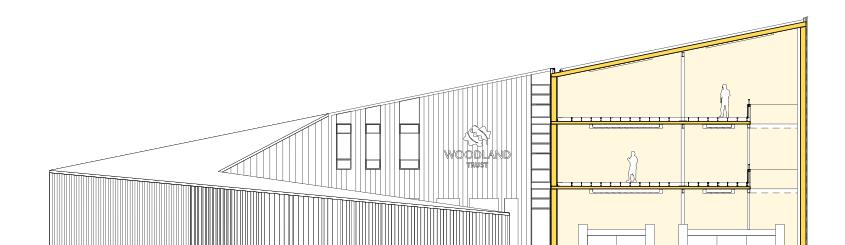

Section



© Dennis Gilbert

**LOCATION**  
 London Borough of Southwark

**HEIGHT / STOREYS**  
 48 ft (14.5 m) / 5 storeys

**CONSTRUCTION COST**  
 £439,000

**ARCHITECT**  
 DSDHA

**STRUCTURAL ENGINEER**  
 Structure Workshop

**TIMBER ENGINEER**  
 Structure Workshop

**TIMBER CONTRACTOR**  
 KLH UK

**TIMBER MANUFACTURER**  
 KLH Massivholz

**MAIN CONTRACTOR**  
 Neilcott Construction

**TIMBER VOLUME**  
 900 ft<sup>3</sup> (25 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 1 week

**OVERALL CONSTRUCTION**  
 52 weeks

**STRUCTURE TYPE**  
 Hybrid


**EMBODIED CARBON WITHIN TIMBER\***  
 15 tons (-13 tonnes) CO<sub>2</sub>e

**CLT FACT**  
 CLT allowed for construction on existing ground floor structure

The building provides workshop and studio space, alongside a boutique store, a meeting space and a roof terrace. Large sliding doors in the workshop allow for generous engagement with the street, providing a place to extend one's view as a counterpoint to the intimate work on the jewellery bench, whilst the third floor balcony extends the outdoor into the interior. Activities on each floor are connected by a spacious staircase that doubles as an exhibition space.

Situated within a conservation area, the modern zinc façade complements the quality of the surrounding context. Site based fabrication ensured refined details throughout the key junctions of the façades, resulting in a high quality building that mirrors the fine craftsmanship within. The façade 'fins' shift selectively in front of windows to animate the elevation and control views in and out of the building, introducing dynamism in the street. The horizontal details subtly relate to the context of the neighboring terraces.

The building consists of a CLT timber panel structure that sits on a combination of steel beams and masonry load-bearing walls at the ground level. Internally this simple timber finish is left exposed, providing a robust setting for the bespoke built-in furniture, all made from the same timber. Over time the interior will reveal a patina of use, recording day-to-day life.

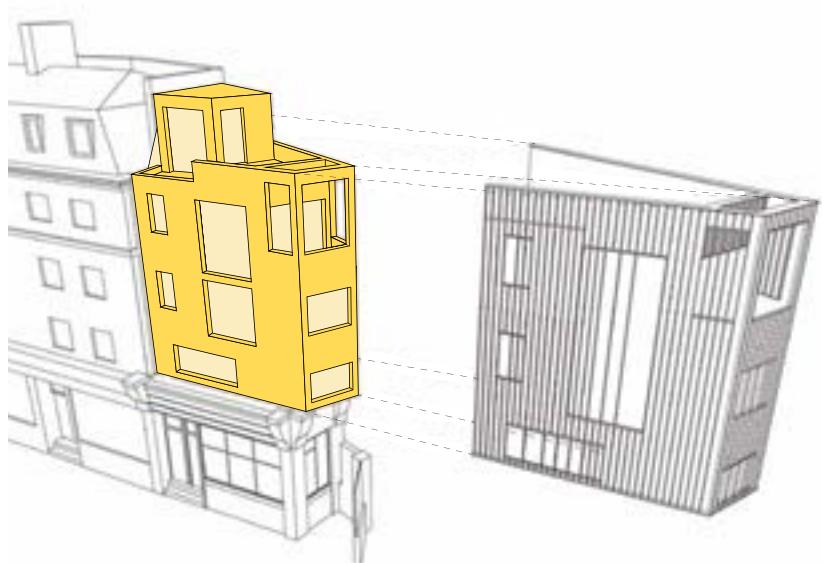

Exploded Diagram



© David Grandorge

**LOCATION**  
Somerset

**HEIGHT / STOREYS**  
15 ft (4.5 m) / 1 storeys

**CONSTRUCTION COST**  
£250,000

**ARCHITECT**  
Hugh Strange Architects

**STRUCTURAL ENGINEER**  
Price & Myers

**TIMBER ENGINEER**  
Eurban

**TIMBER CONTRACTOR**  
Eurban

**TIMBER MANUFACTURER**  
Stora Enso

**MAIN CONTRACTOR**  
N/A

**TIMBER VOLUME**  
5,500 ft<sup>3</sup> (155 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
3 weeks

**OVERALL CONSTRUCTION**  
39 weeks

**STRUCTURE TYPE**  
Pure CLT


**EMBODIED CARBON  
WITHIN TIMBER\***  
-94 tons (-86 tonnes) CO<sub>2</sub>e

**CLT FACT**  
First monolithic CLT  
building in the UK

This building integrates a monolithic CLT structure within an existing rural setting. The dilapidated walls and roof of an old stone and brick barn have been removed and the remaining walls carefully stabilized and repaired. Within these walls two timber structures have been inserted with a single new roof over-sailing the whole composition and providing a covered entrance. The two new timber buildings are identical in their volumes but subtly differentiated in their fenestration and fit-out. The south building provides a drawing archive and display space and is predominantly top lit by a generous roof light.

The CLT panels, ranging in thickness from 12 - 17 inches simultaneously provide structure, insulation and thermal mass, creating a stable internal environment in terms of both temperature and relative humidity. Taking advantage of the natural properties of timber, this simple but bold solution provides the ideal climate for storing the client's collection of historic and contemporary drawings, models and books.

As the first monolithic CLT building in the UK, the Architecture Archive has been an important step in illustrating the true potential of exposed mass timber construction. The building is currently being environmentally monitored to record its performance, serving as a useful prototype for this unique style of construction.

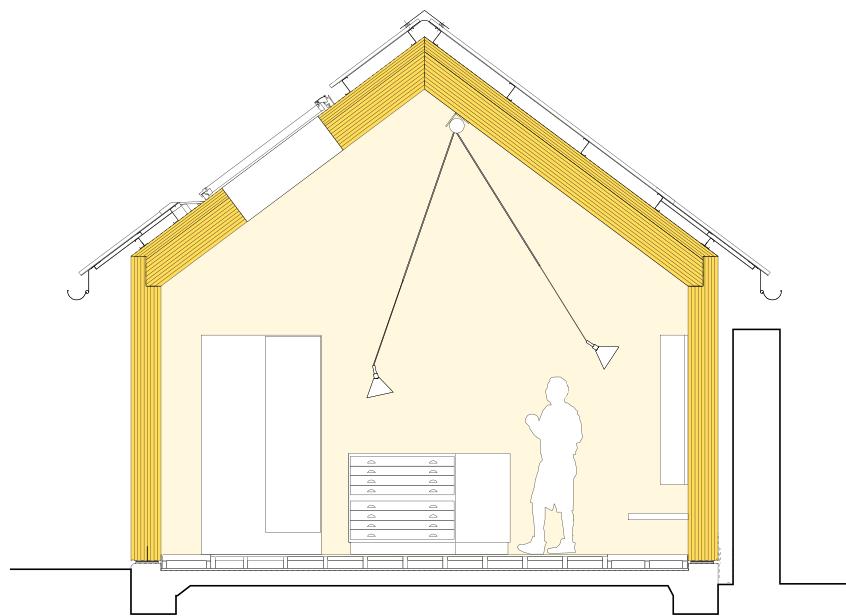



© Simon Kennedy / Arup Associates

2014

Commercial

**SKY BELIEVE IN BETTER BUILDING**

Sky UK

**LOCATION**  
London Borough of Hounslow

**HEIGHT / STOREYS**  
69 ft (21 m) / 4 storeys

**CONSTRUCTION COST**  
£15 million

**ARCHITECT**  
Arup Associates

**STRUCTURAL ENGINEER**  
Arup

**TIMBER ENGINEER**  
Arup

**TIMBER CONTRACTOR**  
B & K Structures

**TIMBER MANUFACTURER**  
Binderholz / Rubner / KLH Massivholz

**MAIN CONTRACTOR**  
Mace

**TIMBER VOLUME**  
68,300 ft<sup>3</sup> (1,934 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
11 weeks

**OVERALL CONSTRUCTION**  
43 weeks

**STRUCTURE TYPE**  
Pure Timber


**EMBODIED CARBON  
WITHIN TIMBER\***  
-1,165 tons (-1,057 tonnes) CO<sub>2</sub>e

**CLT FACT**  
First multi-storey timber commercial office in the UK

Conceived as a home for Sky's outreach and academy training programs, the building is intended to be used mainly by visitors. As such the layout is intuitive with a staircase, suspended along the entire side elevation, unifying the four storeys. Designed to be reconfigurable over the long term with no fixed uses, partitions slide and unfold to interconnect a shifting landscape of rooms and spaces.

To provide an open-plan floor plate, structural walls are limited to the stair cores, lifts and divisions between plant and public spaces. Stability is provided by the diaphragm action of the CLT floor plates transferring horizontal forces to the cores. Within the cores, the CLT walls work compositely with the glulam columns to form cantilevered 'I-beams' that transfer the stability forces to the ground. The resulting push-pull is transferred to the foundations by the columns, and shear forces resisted by the connection of the walls to the concrete ground floor slab.

The specification of a natural wood structure was key as the first building in the UK to be designed in accordance with emerging Wellness Certification. A fabric first, mixed mode energy strategy, PV's and site wide CCHP ensured a sustainable approach to occupation as well as construction. This project demonstrates that off-site prefabrication and timber construction can achieve a unique workplace in half the normal time-frame.

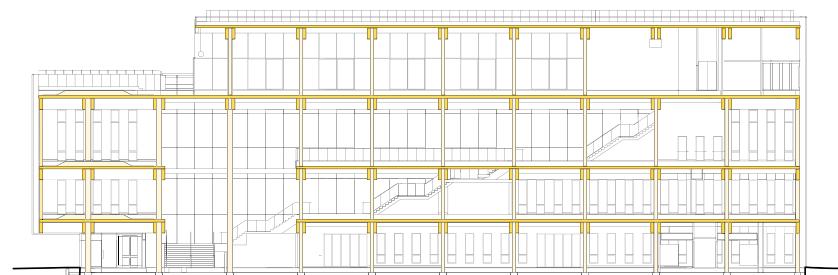



© Paul Younger

2015      Commercial  
**CROSSLAM WORKSHOPS**  
 Herefordshire and Ludlow College

**LOCATION**  
 Hereford, Herefordshire

**HEIGHT / STOREYS**  
 20 ft (6 m) / 1 storeys

**CONSTRUCTION COST**  
 £800,000

**ARCHITECT**  
 Hewitt Studios

**STRUCTURAL ENGINEER**  
 Integral Engineering  
 Design

**TIMBER ENGINEER**  
 Integral Engineering  
 Design

**TIMBER CONTRACTOR**  
 KLH UK

**TIMBER MANUFACTURER**  
 KLH Massivholz

**MAIN CONTRACTOR**  
 C J Bayliss

**TIMBER VOLUME**  
 5,300 ft<sup>3</sup> (150 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 4 days


**OVERALL CONSTRUCTION**  
 26 weeks

The project was envisaged as a model of how to build a 'b-class' building in a sustainable, innovative and flexible way. The College had a number of existing asbestos clad workshops no longer suitable for teaching purposes. The challenge was to demolish an existing workshop and construct a replacement whilst educational activities continued uninterrupted.

Designed to be as efficient as possible the whole building was cut from a single CLT panel type in one operation - a true flat-pack fabrication. Effectively exploiting the omni-directional loading capability of CLT all beams, columns, walls and roof were fabricated from the 8 inch board.

The square-cut sections were fixed together using simple connection details, and services are surface fixed and modular in format to allow for future reconfiguration, if required, as the curriculum evolves. The building is effectively self-finished with no lining or applied finishes.

Externally the building is clad in western red cedar forested from the college's 150 acres of woodland and cut to size on site by college contractors. Variegated panels of FSC-certified marine plywood soften the building at low-level, whilst extensive use of polycarbonate glazing at high-level allows light deep into the pale timber interior.

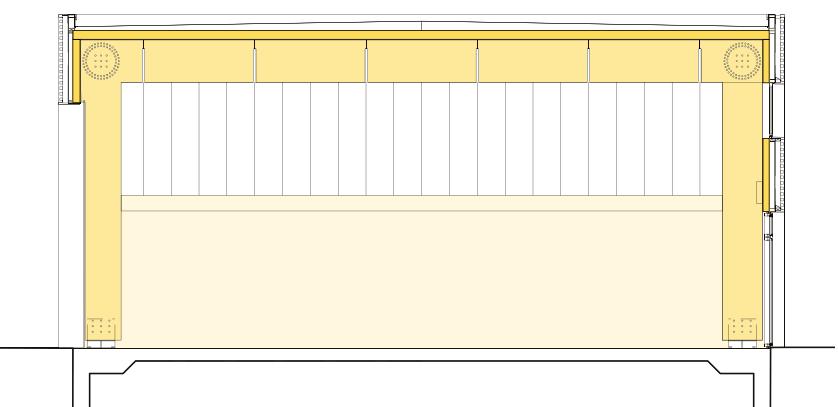

**STRUCTURE TYPE**  
 Pure CLT


**EMBODIED CARBON  
 WITHIN TIMBER\***  
 -95 tons (-86 tonnes) CO<sub>2</sub>

**CLT FACT**  
 Designed to utilize a  
 single thickness of CLT  
 panel throughout

Section



© Alex de Rijke / dRMM

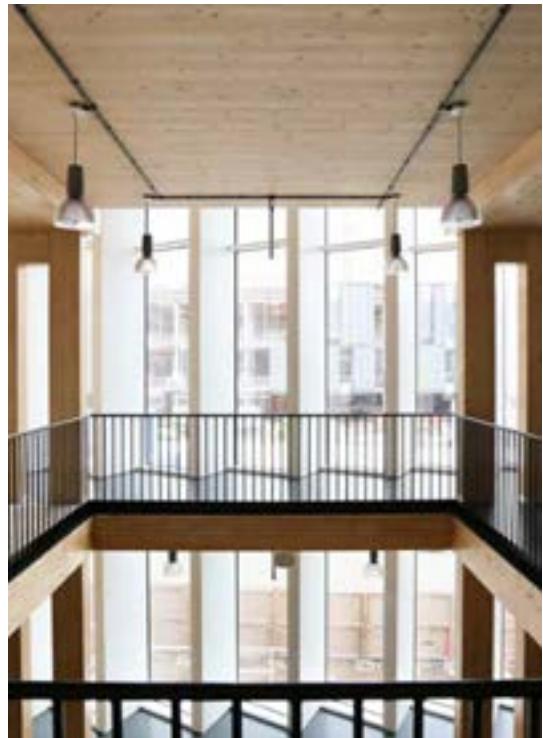

© Alex de Rijke / dRMM



© Paul Carstairs / Arup

2015 Sports & Leisure (Commercial)  
**SKY HEALTH AND FITNESS CENTRE**  
 Sky UK

**LOCATION**  
 London Borough of Hounslow

**HEIGHT / STOREYS**  
 48 ft (14.5 m) / 3 storeys

**CONSTRUCTION COST**  
 £7 million

**ARCHITECT**  
 dRMM

**STRUCTURAL ENGINEER**  
 Arup

**TIMBER ENGINEER**  
 B & K Structures

**TIMBER CONTRACTOR**  
 B & K Structures

**TIMBER MANUFACTURER**  
 Rubner Holzbau /  
 Binderholz

**MAIN CONTRACTOR**  
 Mace

**TIMBER VOLUME**  
 22,400 ft<sup>3</sup> (634 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 4.5 weeks

**OVERALL CONSTRUCTION**  
 20 weeks

**STRUCTURE TYPE**  
 Pure Timber


**EMBODIED CARBON  
 WITHIN TIMBER\***  
 -386 tons (-350 tonnes) CO<sub>2</sub>

**CLT FACT**  
 2.5 week shorter program  
 than a steel alternative


Embodying corporate sustainability policies, this new health and fitness centre on the Sky campus was built using a unique structural arrangement of glulam bifurcated timber columns and glulam beams. The result is close to a flat-slab construction, with CLT perimeter walls, cores and floors.

Developed especially for the project, reinforced glue-laminated 'superbeams' span from the front-to-back of the building in a shallow profile. These superbeams utilize flatwise orientations of the timber grain and steel reinforcement to efficiently reduce the depth of the timber beam and overall height of the building compared to traditional glulam beam arrangements. The superbeams are supported by glulam columns that are bifurcated into two vertical elements to provide stiffness and temporary support to the wide beams. CLT floor plates span between the beams to complete the structural system. It is the first engineered timber gymnasium in the UK.

Internally, the gym spaces are connected through a stacked timber stair that links the three floors, void spaces providing visual connection and allowing daylight deep into the plan. A limited material palette was developed of natural, durable materials, while all of the structural timber was left exposed to add a richness of natural texture. The timber structure links this new fitness centre to the adjacent Believe in Better offices finished the previous year.

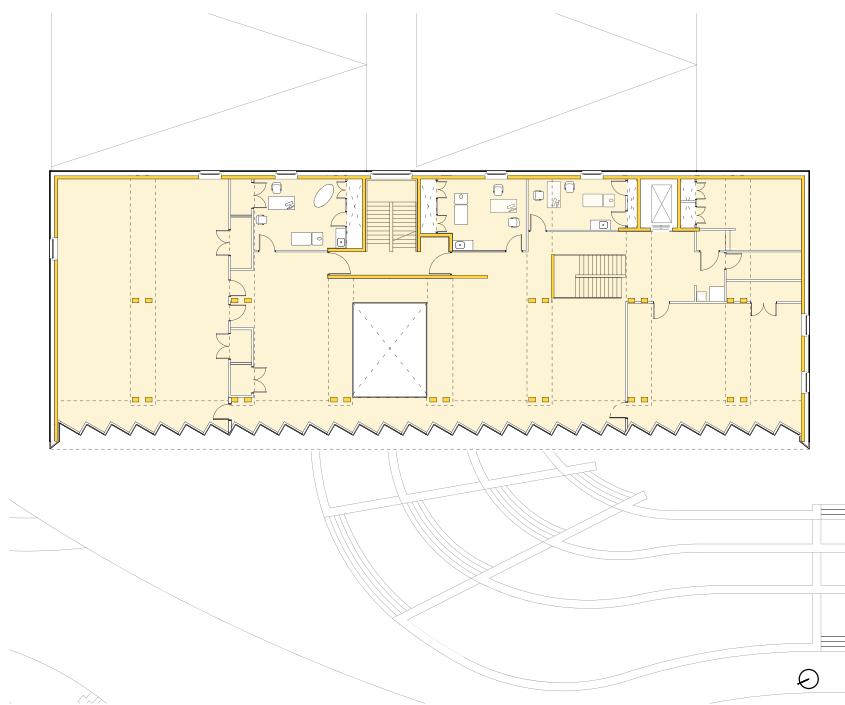

First Floor Plan

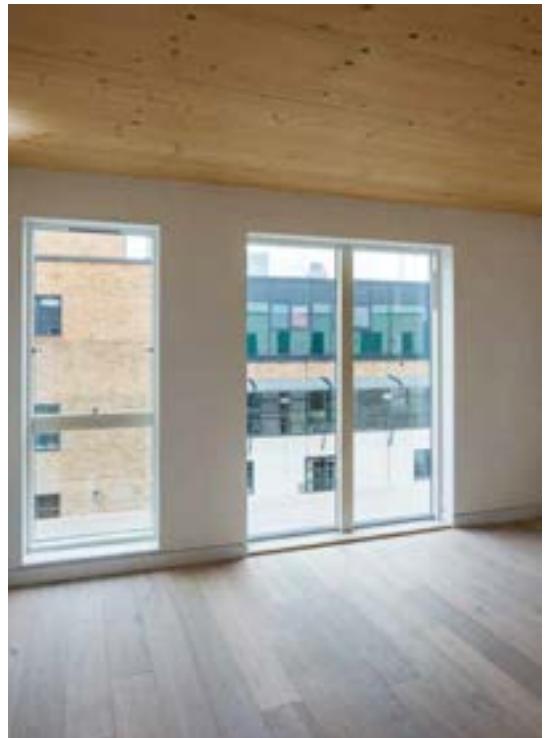

© Ben Clarkson

**LOCATION**  
 London Borough of Hackney

**HEIGHT / STOREYS**  
 66 ft (20 m) / 6 storeys

**CONSTRUCTION COST**  
 £4.1 million

**ARCHITECT**  
 Waugh Thistleton Architects

**STRUCTURAL ENGINEER**  
 Richard Jackson Engineering

**TIMBER ENGINEER**  
 B & K Structures / Engenuiti

**TIMBER CONTRACTOR**  
 B & K Structures

**TIMBER MANUFACTURER**  
 Binderholz

**MAIN CONTRACTOR**  
 Gold Section Homes

**TIMBER VOLUME**  
 21,600 ft<sup>3</sup> (611 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 13 weeks

**OVERALL CONSTRUCTION**  
 65 weeks

**STRUCTURE TYPE**  
 Hybrid

**EMBODIED CARBON WITHIN TIMBER\***  
 -372 tons (-338 tonnes) CO<sub>2</sub>e


**CLT FACT**  
 CLT interiors drove higher than average sales values

Curtain Place is a mixed-use six storey building, plus basement, accessed from a small yard in the heart of Shoreditch, London. The first three storeys are clad in dark brickwork and zinc, and house offices which project into a planted courtyard. Stepped back in line with neighboring buildings are three further residential floors, demarcated with white brick.

The building has a concrete basement, with a hybrid CLT and steel structure from ground floor upwards. All floor slabs, roof slabs, stairs, core walls and external walls are CLT, with cellform beams and columns in steel to facilitate the open-plan office spaces. The timber and services are exposed throughout the office spaces giving a contemporary, stripped-down feel, while sawtooth glazing maximizes views back onto Curtain Road.

The flats are almost entirely formed from CLT, including party walls and partitions. CLT soffits are also exposed in the top floor flats where acoustic requirements were less onerous, bringing warmth to the interior of these inner-city apartments.

Chosen primarily to overcome planning restrictions on building heights, and to assist with access to this backland site, the speed of erection of the CLT was a pleasant surprise for the contractor-developer client. Once the roof membranes and windows were installed, a watertight building was achieved allowing both internal and external works to continue in tandem.

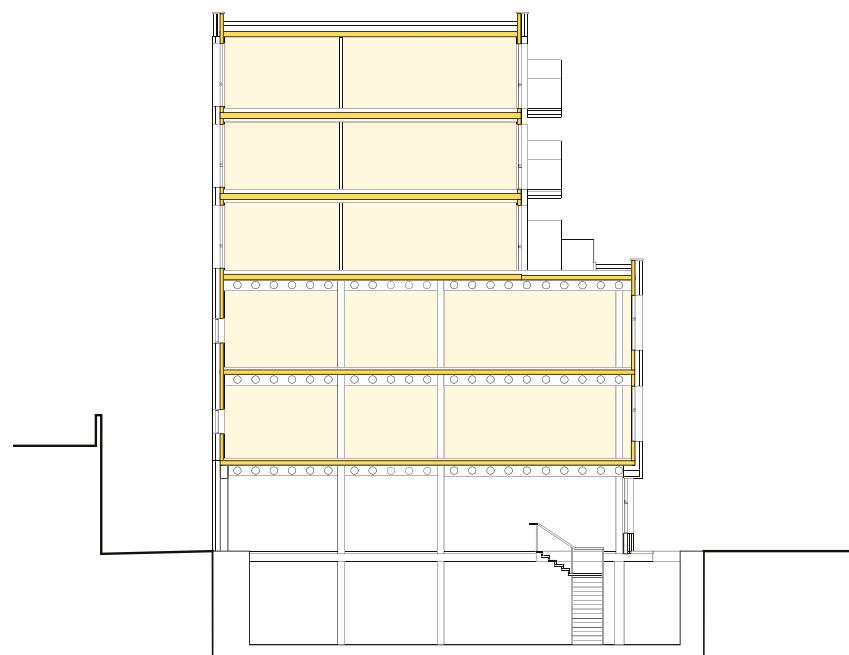

Section



© Alan Williams Photography

2016

Commercial

## CHRISTIES CARE OFFICE BUILDING

Christies Care

**LOCATION**

Saxmundham, Suffolk

**HEIGHT / STOREYS**

43 ft (13 m) / 2 storeys

**CONSTRUCTION COST**

£1.1 million

**ARCHITECT**

Nicholas Hare Architects

**STRUCTURAL ENGINEER**

Integral Engineering  
Design (IED)

**TIMBER ENGINEER**

Integral Engineering  
Design (IED)

**TIMBER CONTRACTOR**

Eurban

**TIMBER MANUFACTURER**

Stora Enso

**MAIN CONTRACTOR**

SEH French

**TIMBER VOLUME**

7,800 ft<sup>3</sup> (220 m<sup>3</sup>)

**TIMBER ASSEMBLY**

3 weeks

**OVERALL CONSTRUCTION**

40 weeks

**STRUCTURE TYPE**

Pure Timber

**EMBODIED CARBON  
WITHIN TIMBER\***

-136 tons (-123 tonnes) CO<sub>2</sub>e

**CLT FACT**

White wash used to  
reduce effect of the  
exposed CLT darkening


Christies Care is a major employer in the local area. Their new headquarters provides space for around 60 staff. Standing on a sloping site at the edge of town, the building form and external materials were selected to be sympathetic to their context.

The building is a simple two-storey box with a pitched roof running along a north-south axis allowing the primary office windows to face east or west. The ground floor consists of cellular offices and a café, whilst the first floor consists of a single open plan office which extends into the roof space.


The design of the office targeted sustainability both through its material selection and by following Passivhaus principles in its approach to energy efficiency. Chosen for its low embodied energy, speed of construction and appearance within the finished building, the entire superstructure is made of CLT supported on a slender frame of glulam beams and glulam columns.

While the CLT is exposed throughout, basic industrial quality was chosen. The surface was given a dilute white spray, to prevent the timber darkening over time.


The external cladding is of vertical Accoya tongue-and-groove strips. Deliberately left untreated, it will grey over time, in a reference to the traditional local timber barns.

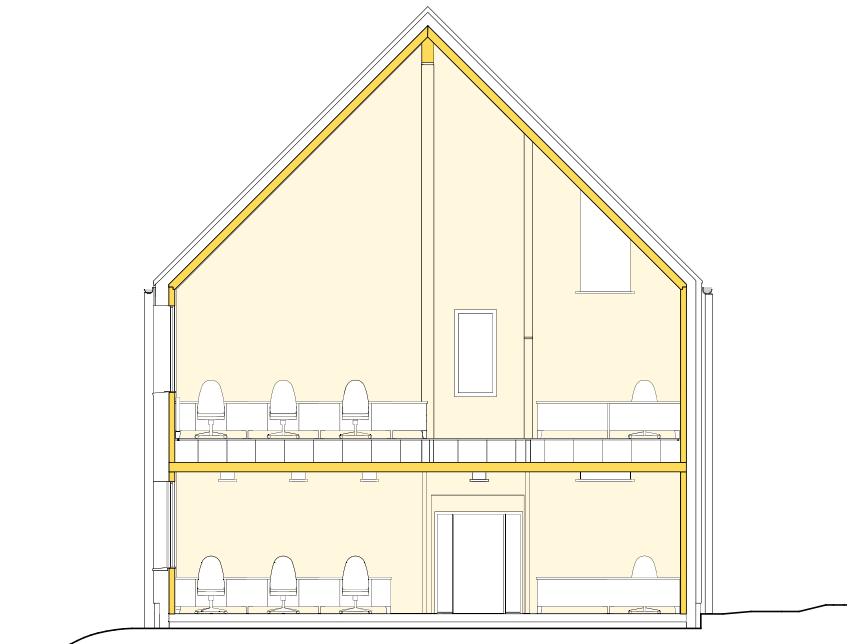

Section

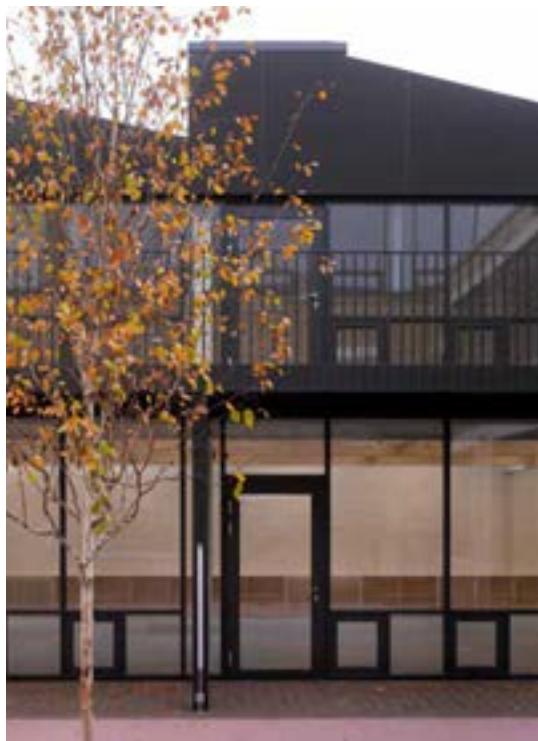

© Henley Halebrown Architects

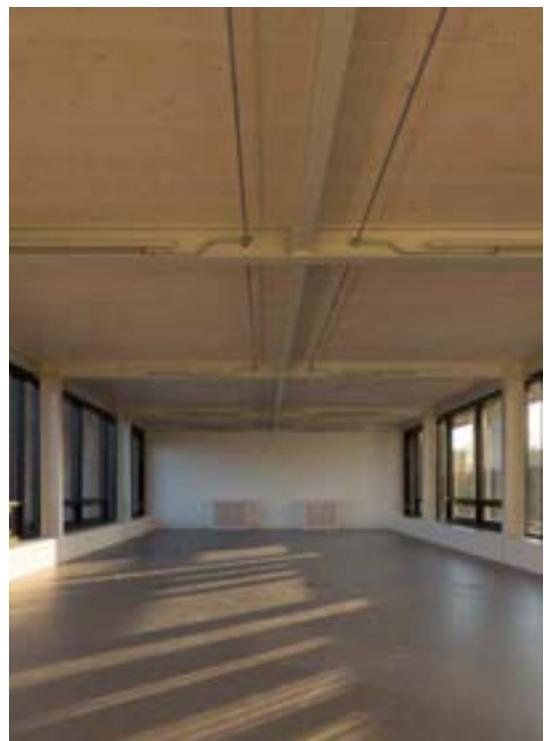

© Henley Halebrown Architects



© Nick Kane

**LOCATION**  
 London Borough of Hackney

**HEIGHT / STOREYS**  
 48 ft (14.5 m) / 4 storeys

**CONSTRUCTION COST**  
 £5 million

**ARCHITECT**  
 Henley Halebrown Architects

**STRUCTURAL ENGINEER**  
 MMP Design

**TIMBER ENGINEER**  
 Eurban

**TIMBER CONTRACTOR**  
 Eurban

**TIMBER MANUFACTURER**  
 Hasslacher

**MAIN CONTRACTOR**  
 Sullivan Brothers Construction

**TIMBER VOLUME**  
 1,700 ft<sup>3</sup> (49 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 2 weeks

**OVERALL CONSTRUCTION**  
 39 weeks

**STRUCTURE TYPE**  
 Hybrid

**EMBODIED CARBON WITHIN TIMBER\***  
 -29 tons (-26 tonnes) CO<sub>2</sub>e


**CLT FACT**  
 Using CLT allowed for easy installation on a tight constrained site

90-100 De Beauvoir Road consists of 6 Victorian warehouses used primarily as commercial space. They offer well proportioned spaces which have a strong character derived from their simple industrial past. The top floors have high levels of natural light achieved using skylights and generous ceiling heights. The extensions retain these attributes whilst adding their own distinct character.

The roof extension is conceived as a series of identical 320ft<sup>2</sup> units each of which can be linked to the next to create larger spaces. Asymmetric pitched roofs rising to meet roof lights create a gently undulating skyline.

At number 92 and 98 a precast white concrete façade reflects the existing concrete lintels, and the rhythm of the new columns matches that of the brick piers below. At 94 the glass roof and outbuildings were removed to create a central external courtyard. Restoring the ground floor openings on the courtyard side to both the front and back buildings brings light into the ground floor and activity into the courtyard.

The use of CLT throughout the extension allowed for economical construction. Primary elements could be easily manoeuvred into place on the tight site. Manufactured off-site, the precision allowed the extension to accurately interface with the existing structure and building fabric.

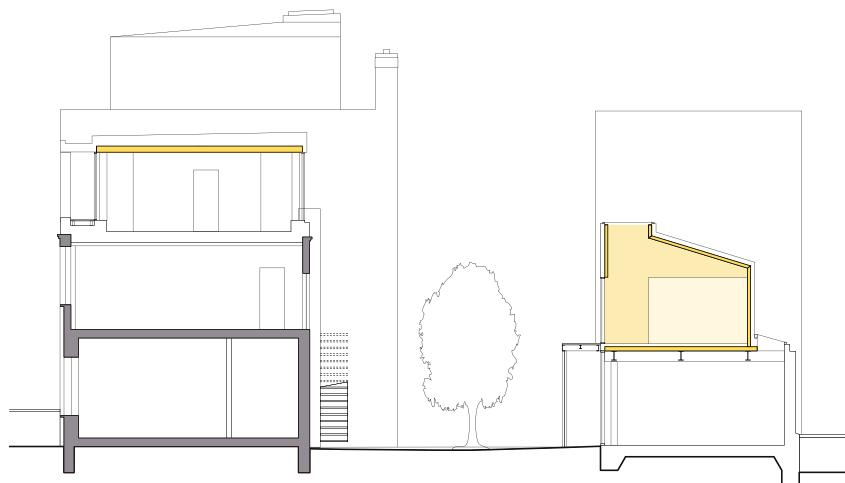


Section



© Richard Leeny



© Image Works

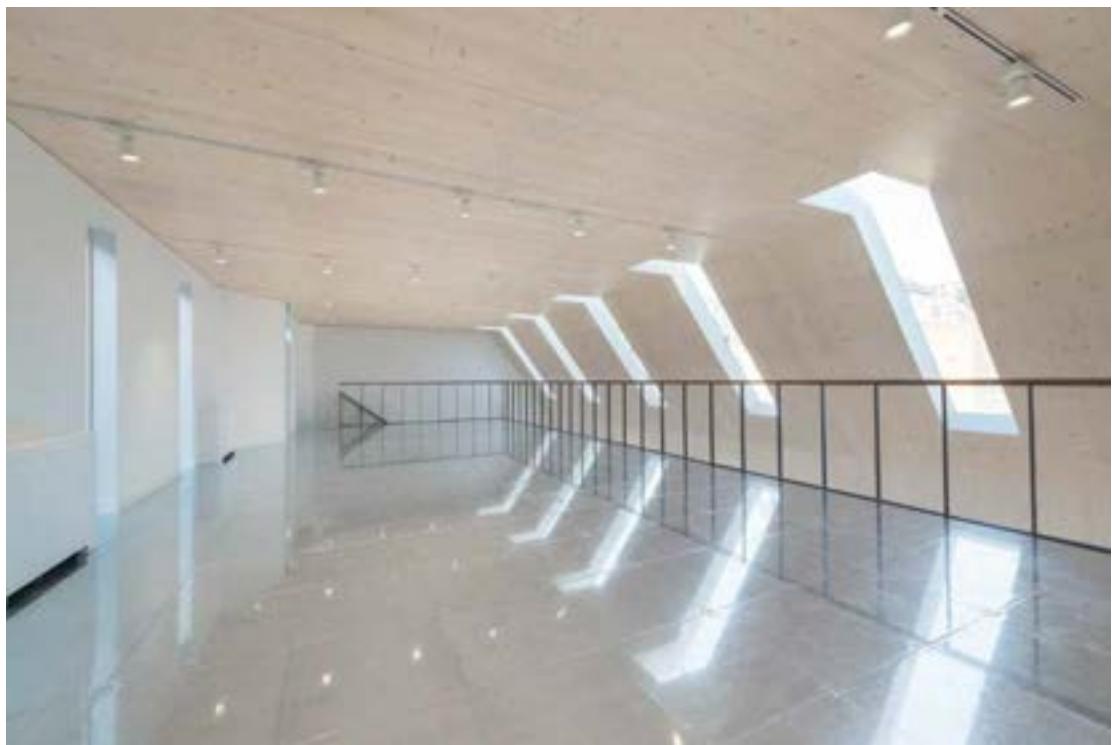

© Richard Leeny

**LOCATION**  
 London Borough of Westminster

**HEIGHT / STOREYS**  
 66 ft (20 m) / 6 storeys

**CONSTRUCTION COST**  
 £3.3 million

**ARCHITECT**  
 Hale Brown Architects

**STRUCTURAL ENGINEER**  
 Heyne Tillett Steel

**TIMBER ENGINEER**  
 Eurban

**TIMBER CONTRACTOR**  
 Eurban

**TIMBER MANUFACTURER**  
 Stora Enso

**MAIN CONTRACTOR**  
 Collins Construction

**TIMBER VOLUME**  
 800 ft<sup>3</sup> (22 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 5 days

**OVERALL CONSTRUCTION**  
 52 weeks

**STRUCTURE TYPE**  
 Pure CLT

**EMBODIED CARBON  
 WITHIN TIMBER\***  
 -11 tons (-10 tonnes) CO<sub>2</sub>e

**CLT FACT**  
 CLT facilitated a rooftop office extension on a tight, central London site


This retrofitting and refurbishment of an existing office added an additional floor to an historic 1930s building creating a light and open double-height office space with mezzanine and angled rooflights.

Inspired by galleries in the local area, CLT was used to construct the additional floor, creating a space which has a different feel to the rest of this otherwise classic steel frame and masonry building. The slope of the roof, dictated by rights to light requirements was easily executed through the prefabrication and accuracy of CLT construction.

Selected due to the restricted nature of the site, difficulty in storing materials and complexity of deliveries to this central London location, the aesthetic of the CLT became an integral part of the interior feel, not only within the new build floors, but throughout the entire building.

The CLT is left exposed within the extension creating a feature space with minimal servicing and a clean, crisp aesthetic. White-washed timber is continued down through the common parts of the building and expressed through spruce veneer to doors and timber cladding used in these areas.

The project successfully integrates the old and new aesthetic, respecting the history of the original features and complementing them with a simple palette of materials.

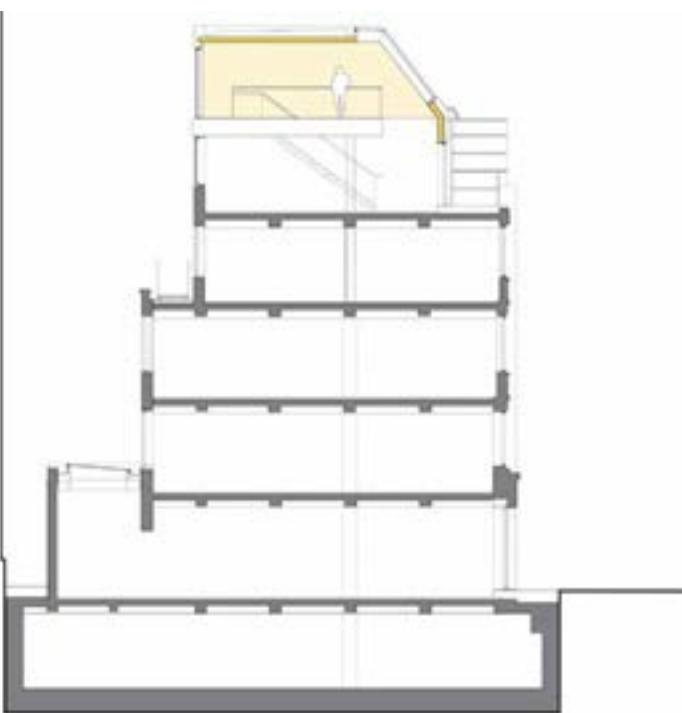

Section



© Dirk Lindner

<b>LOCATION</b>	Royal Leamington Spa
<b>HEIGHT / STOREYS</b>	30 ft (9.2 m) / 1 storey
<b>CONSTRUCTION COST</b>	Undisclosed
<b>ARCHITECT</b>	Waugh Thistleton Architects
<b>STRUCTURAL ENGINEER</b>	Eckersley O'Callaghan
<b>TIMBER ENGINEER</b>	Hess Timber
<b>TIMBER CONTRACTOR</b>	Hess Timber
<b>TIMBER MANUFACTURER</b>	Hess Timber / Hasslacher / Pollmeier
<b>MAIN CONTRACTOR</b>	JCA
<b>TIMBER VOLUME</b>	36,100 ft <sup>3</sup> (1,021 m <sup>3</sup> )
<b>TIMBER ASSEMBLY</b>	6 weeks
<b>OVERALL CONSTRUCTION</b>	39 weeks
<b>STRUCTURE TYPE</b>	Pure Timber
<b>EMBODIED CARBON WITHIN TIMBER*</b>	-632 tons (-574 tonnes) CO <sub>2</sub> e


Inspired by the master builders working at the high point of Victorian engineering, Vitsoe's new home brings together a rigorous and diverse group of over 30 specialists in their fields.

Built as a kit of parts the building is an extension of Vitsoe's system-thinking which is integral to its furniture design. The building can be refined and adapted in response to the changing needs of all it serves – company, people and environment.

The first building in the UK to be made entirely of LVL, the high performance engineered hardwood structure permits beams and columns to have smaller cross sections than softwood glulam, thereby providing greater elegance to the timber structure

Spanning 445ft in length, 82ft in width and 30ft in height, the new HQ and production building is naturally ventilated and naturally lit via its north-facing saw-tooth roof-lights. Prevailing wind provides cross ventilation, while the high ceiling height allows heat to rise for comfort in summer.

Windows bring the outside in, connecting employees to the surrounding landscape, while passers-by may glimpse activities within. The kitchen and dining area face directly north offering a panoramic view of the silver birch trees in the adjacent urban community woodland.

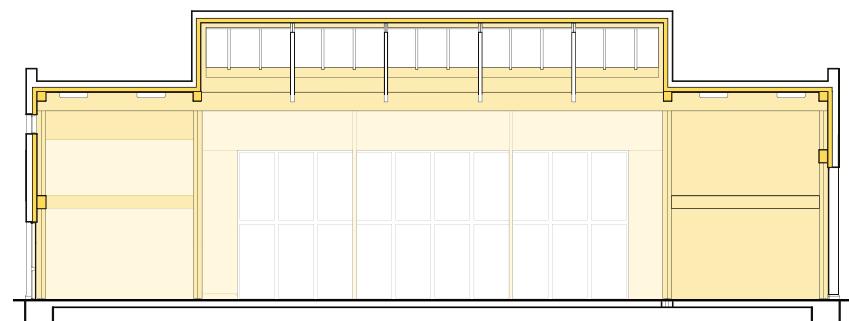

**CLT FACT**  
 The Baubuche beams  
 are as slender as an  
 equivalent in steel

Section



© Jack Hobhouse



© Forbes Massie



© Jack Hobhouse

2017      Commercial  
**WILDERNESSE RESTAURANT**  
 Pegasus Life

**LOCATION**  
 Sevenoaks, Kent

**HEIGHT / STOREYS**  
 21 ft (6.5 m) / 1 storey

**CONSTRUCTION COST**  
 £1.9 million

**ARCHITECT**  
 Duggan Morris Architects

**STRUCTURAL ENGINEER**  
 Peter Brett Associates

**TIMBER ENGINEER**  
 Eurban

**TIMBER CONTRACTOR**  
 Eurban

**TIMBER MANUFACTURER**  
 Schilliger Holz

**MAIN CONTRACTOR**  
 Shaylor Group

**TIMBER VOLUME**  
 3,000 ft<sup>3</sup> (84 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 2 weeks

**OVERALL CONSTRUCTION**  
 50 weeks

**STRUCTURE TYPE**  
 Pure Timber


**EMBODIED CARBON  
WITHIN TIMBER\***  
 -53 tons (-48 tonnes) CO<sub>2</sub>e

**CLT FACT**  
 Accuracy of MMC  
 used to create classical  
 arched/vaulted forms

The Wildernesse Restaurant is situated within a contemporary housing scheme designed as part of a holistic retirement community. The new restaurant pavilion is adjacent to the Grade II listed Wildernesse House, the origins of which can be traced back to the 13th century. The new restaurant aims to reinstate the pavilion typology of the conservatory that sat within the kitchen garden in the 19th century. Thereby creating an exquisite dining space with the transparency of a traditional glasshouse.

The design melds classical forms manufactured with the efficiency of modern methods of construction. The result is a contemporary and easy to read pavilion within a landscape steeped in heritage. CLT arches sit atop a grid of glulam columns; the timber vaults were formed of a CNC lattice structure with layers of ply overlaid. The accuracy offered by prefabrication ensured these vaults could be precisely fitted to each opening, concealing all services and joints.


The rhythm of the arches defines large glazed openings, while a central elevated lantern houses the open kitchen, creating a permeable space filled with light and expansive views across the estate. The use of minimal repeated elements is a key concept for the construction of the restaurant - from the structural components and interior lining, to the modulation of the cladding.

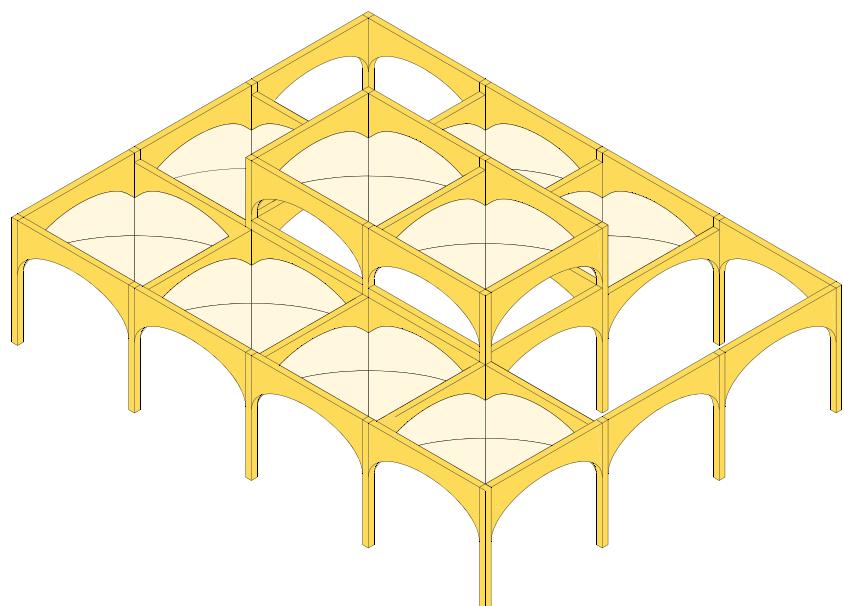

Axonometric Structural Diagram



© Cullinan Studio / Hayes Davidson

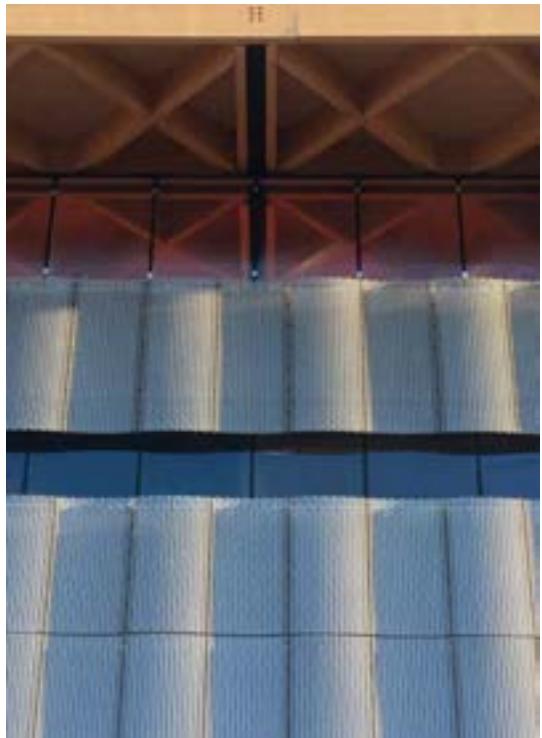

© Cullinan Studio



© Cullinan Studio / Hayes Davidson

2018

Commercial (Education)

## NATIONAL AUTOMOTIVE INNOVATION CENTRE

Jaguar Land Rover / Tata Motors European Technical Centre /  
WMG / University of Warwick

**LOCATION**

Coventry, West Midlands

**HEIGHT / STOREYS**

66 ft (20 m) / 4 storeys

**CONSTRUCTION COST**

£80 million

**ARCHITECT**

Cullinan Studio

**STRUCTURAL ENGINEER**

Arup

**TIMBER ENGINEER**

Arup / Engenuiti

**TIMBER CONTRACTOR**

B & K Structures

**TIMBER MANUFACTURER**

Rubner Holzbau

**MAIN CONTRACTOR**

Balfour Beatty

**TIMBER VOLUME**

84,800 ft<sup>3</sup> (2,400 m<sup>3</sup>)

**TIMBER ASSEMBLY**

24 weeks

**OVERALL CONSTRUCTION**

150 weeks

**STRUCTURE TYPE**

Hybrid

**EMBODIED CARBON  
WITHIN TIMBER\***


-1,379 tons (-1,251 tonnes) CO<sub>2</sub>e

**CLT FACT**

Timber 'umbrella' roof is  
to be adopted across JLR  
projects as brand identity

The NAIC brings together many elements of industrial design: commercial and academic engineering research and testing; undergraduate teaching and social functions with the objective of developing the technologies and products of the future. Designed to encourage collaboration and cross-fertilisation of ideas, the building is located on a university campus and has two distinct parts: an inner sanctum and a shop window. Flexible research spaces over four storeys surround an equally flexible atrium space where people can come together. A distinctive timber roof structure acts to unify the spaces, visually tying together the closed confidential and open spaces.

The roof is a complex grid of steel, glulam and CLT. The primary grid is made of steel box-sections with additional truss elements added where greater spans are needed. A grid of glulam beams is set at 45 degrees to the primary structure and sits within the steels. The glulam is shaped on the underside to vary the depth in relation to the forces present along their length and so optimize material, made possible by the ease and accuracy of prefabrication. To facilitate the construction each beam has a tag identifying its position within the structure. The CLT roof deck gives stiffness to the roof plate while lateral support is via the stair cores. The external walls are off-site manufactured timber cassettes, combining CLT, glulam and OSB with mineral wool insulation.

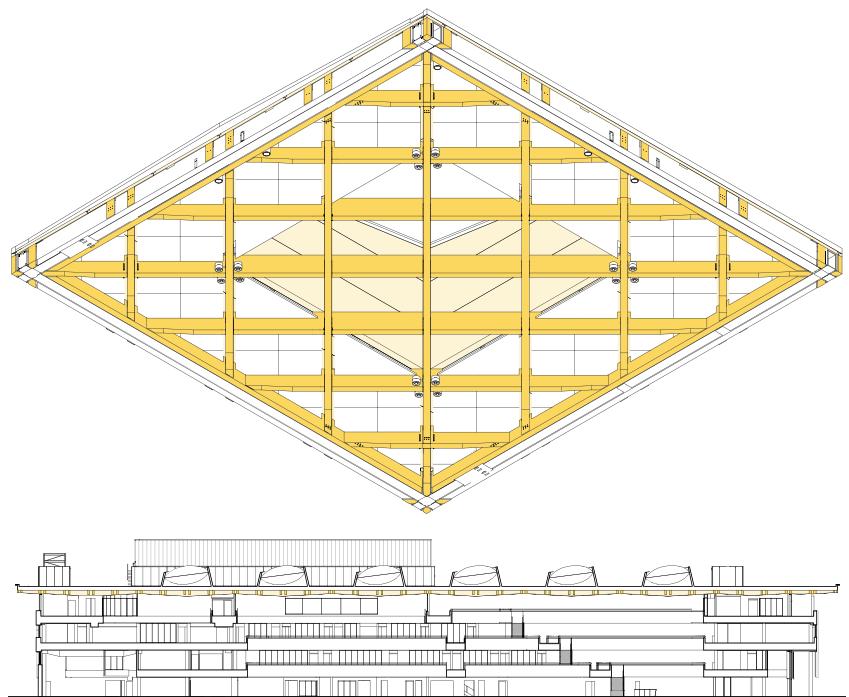

Detail & Section



# PUBLIC & CIVIC

A vast range of building uses has been grouped within this category from healthcare, sports and leisure buildings to libraries, museums and religious buildings. As such the 21 schemes within this sector are difficult to compare.


What this disparate grouping of buildings does illustrate is the flexibility that can be achieved by building with CLT and hybrid solutions, and the complexity and breadth of constraints the use of timber can help to overcome.

From construction within an existing church, where the panels had to be sized for delivery through the church door, to construction on a renovated pier 500 feet from the coast and exposed to coastal weather. CLT has proved itself to be a suitable material to address the most challenging of sites.

Some of the projects within this sector had a level of freedom that allowed for more experimentation into the possibilities of using timber. Included within this category are various installation/temporary projects that successfully worked through potential applications of CLT that had not yet been proved as viable to be used within a permanent building.

Now that CLT has proved its competitiveness, it is through the freedom of design of these schemes that architects and engineers can begin to demonstrate the full capability of CLT.

Image: Glowing Orchards, Tonkin Liu © Anthony Hurren

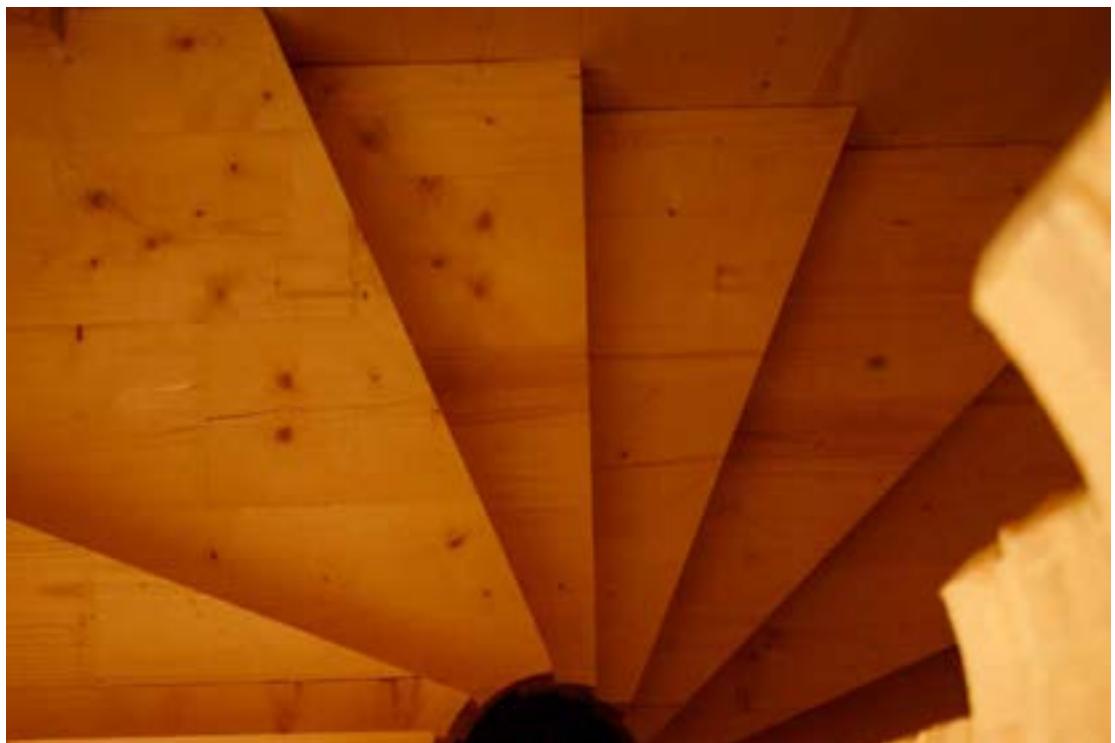

© Alex de Rijke / dRMM

2007      Public & Civic  
**M K 4 0   T O W E R**  
 Milton Keynes Gallery

**LOCATION**  
 Milton Keynes,  
 Buckinghamshire

**HEIGHT / STOREYS**  
 69 ft (21 m) / 7 storeys

**CONSTRUCTION COST**  
 £25,000

**ARCHITECT**  
 dRMM

**STRUCTURAL ENGINEER**  
 Pryce & Myers

**TIMBER ENGINEER**  
 KLH UK

**TIMBER CONTRACTOR**  
 KLH UK

**TIMBER MANUFACTURER**  
 KLH Massivholz

**MAIN CONTRACTOR**  
 Steve Coleman

**TIMBER VOLUME**  
 1,400 ft<sup>3</sup> (39 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 5 days

**OVERALL CONSTRUCTION**  
 7 days

**STRUCTURE TYPE**  
 Pure CLT

**EMBODIED CARBON  
 WITHIN TIMBER\***  
 -24 tons (-22 tonnes) CO<sub>2</sub>e


**CLT FACT**  
 Temporary installation  
 proved feasibility of tall  
 timber cores

Commissioned to mark the 40th anniversary of the city of Milton Keynes, this temporary installation doubled as a dynamic sculpture and an experiment in the structural capabilities of CLT.


The artwork conceptually contrasts with the predominant steel/concrete horizontality of the city, offering an opportunity for visitors to the site to climb the tower and discover views across the city. In addition it demonstrates the capacity of engineered timber to serve as building core.

MK40 is a 70ft, 7-storey freestanding vertical cantilever stair tower composed entirely of 6 inch thick CLT panels. Built on a public plaza in front of the city gallery and theatre buildings, no ground foundations were possible. Instead, the timber tower had an integral braced timber base that rests directly on paving pads on sand. No glue was used. The structure is held together by hundreds of screws, carefully positioned to deal with the transfer of wind-load from the tower to the base.

Originally intended to be shown for only two months, the prototype sculpture was in place for one year, visibly demonstrating the structural capacity of CLT to form the core stair/lift shaft for tall buildings above 4 storeys, which was the maximum to have been built at the time.

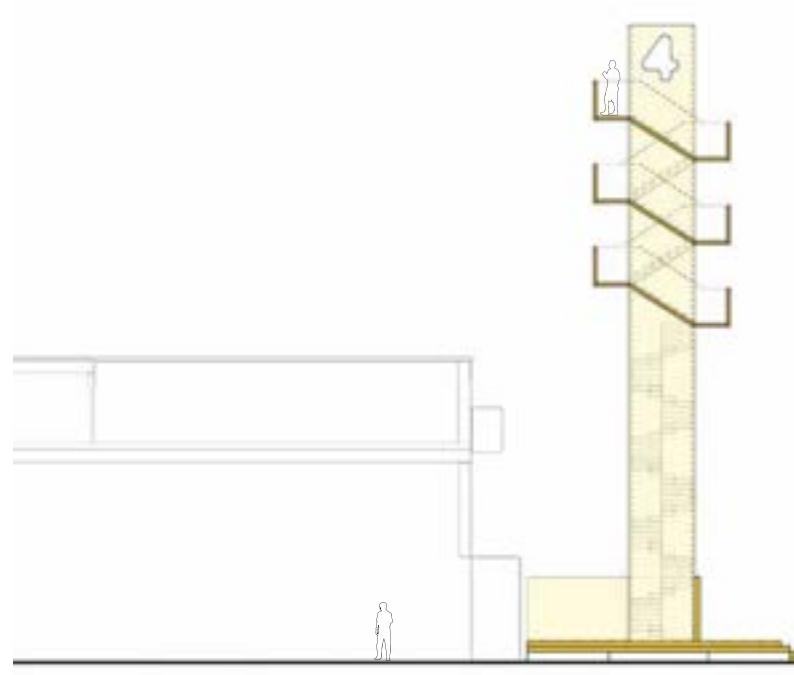

Section

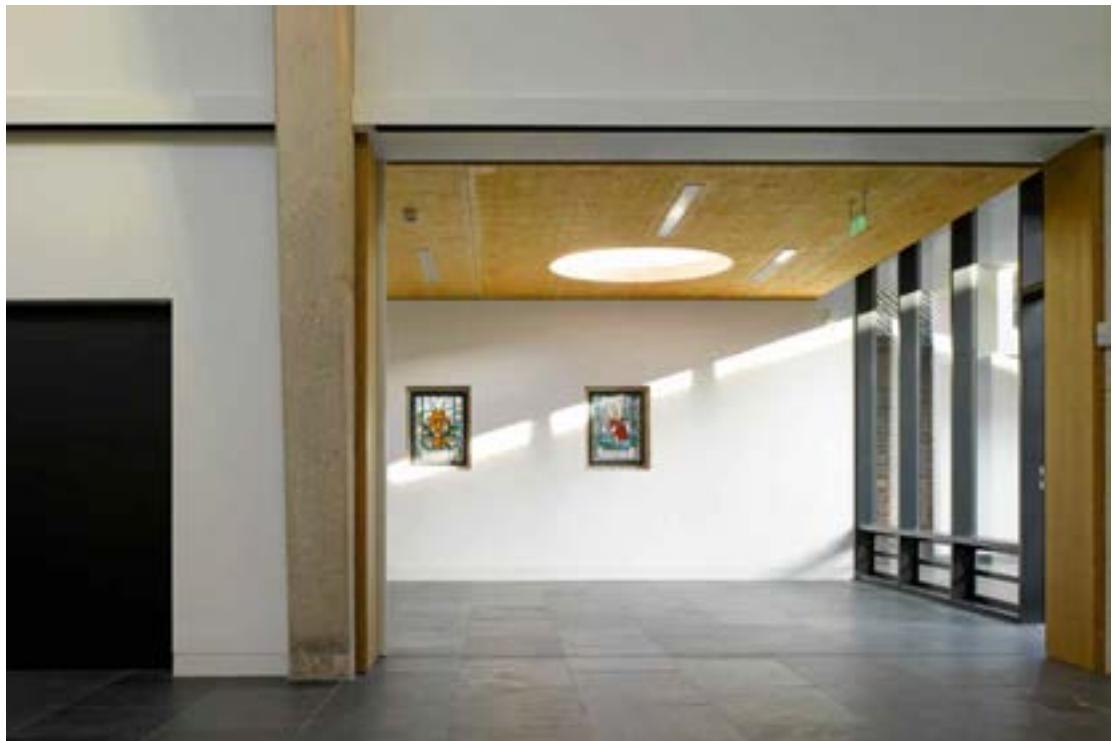

© Nick Kane

2008      Public & Civic  
**LUMEN REFORM CHURCH**  
 United Reform Church

**LOCATION**  
 London Borough of  
 Camden

**HEIGHT / STOREYS**  
 63 ft (19.2 m) / 1 storey

**CONSTRUCTION COST**  
 £1.8 million

**ARCHITECT**  
 Theis and Khan  
 Architects

**STRUCTURAL ENGINEER**  
 FJ Samuely and Partners

**TIMBER ENGINEER**  
 KLH UK

**TIMBER CONTRACTOR**  
 KLH UK

**TIMBER MANUFACTURER**  
 KLH Massivholz

**MAIN CONTRACTOR**  
 Dollman Ralston

**TIMBER VOLUME**  
 2,900 ft<sup>3</sup> (83 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 3 days

**OVERALL CONSTRUCTION**  
 52 weeks

**STRUCTURE TYPE**  
 Pure CLT

**EMBODIED CARBON  
 WITHIN TIMBER\***  
 -49 tons (-45 tonnes) CO<sub>2</sub>

**CLT FACT**  
 CLT overcame issues of  
 delivery and installation  
 from a very busy road


This renovation of a 1960s church involved adding an accessible entrance, community spaces and ancillary accommodation, and creating a new courtyard garden out of the existing car park.

Using the existing concrete and brick structure as the starting point, the concept was to create a new conical 'sacred space' in the centre of the church to subdivide the area into a café and church with worship at its centre.


The 'sacred space' is the pivotal space within the church. Lit by a single source of light 36ft above floor level, the light penetrates through the roof and draws the gaze upwards towards the sky. The white render and changing light gives the space a pure and elemental feel and imbues it with a peaceful, religious aura.

To bring the church into the 21st century and open it up to the local, multi-faith community, a series of single storey CLT spaces were created around the new courtyard.

CLT, selected primarily for it's sustainable qualities, helped to overcome site access issues being lifted over the existing structures and craned directly into place. The CLT panels used for the roof of the single storey extensions are left exposed adding to the natural palette of materials.

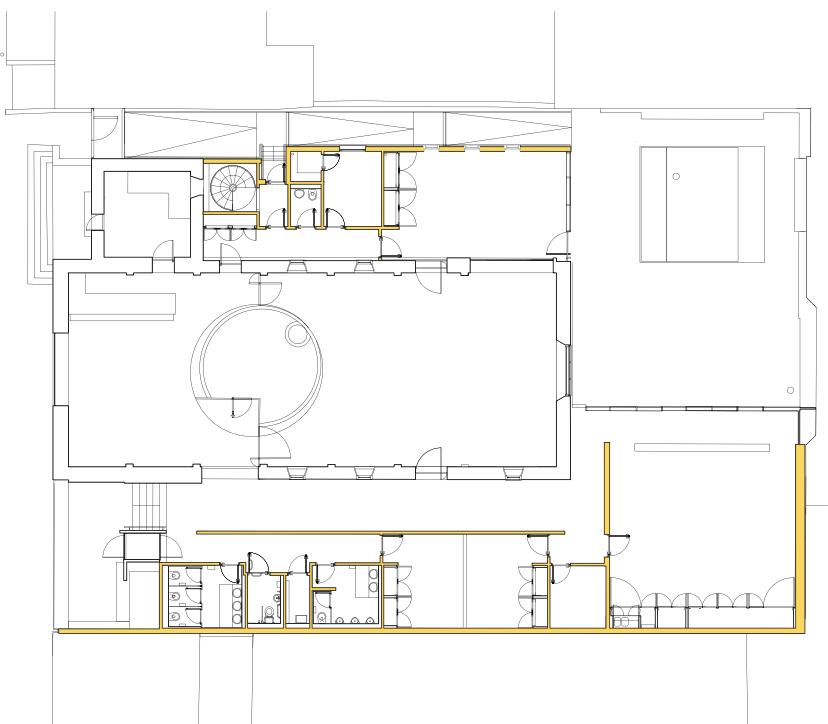

Ground Floor Plan

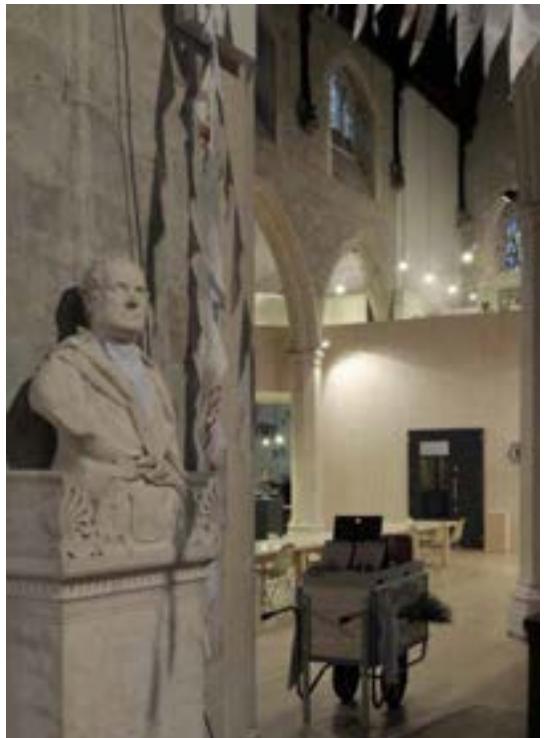

© David Grandorge

2009

Public & Civic  
**THE GARDEN MUSEUM**

The Garden Museum

**LOCATION**  
London Borough of Lambeth

**HEIGHT / STOREYS**  
22 ft (6.6 m) / 2 storeys

**CONSTRUCTION COST**  
£300,000

**ARCHITECT**  
Dow Jones Architects

**STRUCTURAL ENGINEER**  
Momentum Consulting Engineers

**TIMBER ENGINEER**  
Eurban

**TIMBER CONTRACTOR**  
Eurban

**TIMBER MANUFACTURER**  
Schilliger Holz

**MAIN CONTRACTOR**  
Redwing

**TIMBER VOLUME**  
3,200 ft<sup>3</sup> (90 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
2 weeks

**OVERALL CONSTRUCTION**  
13 weeks

**STRUCTURE TYPE**  
Pure CLT

**EMBODIED CARBON WITHIN TIMBER\***  
-57 tons (-52 tonnes) CO<sub>2</sub>e


**CLT FACT**  
Adaptability of panel dimensions allowed for construction inside nave

The architectural concept was to create a lightweight belvedere that could sit independently within the nave of a Grade II\* listed church. The belvedere structure enables the placement of the temporary gallery at ground floor level, moving the permanent collection, from its former location in the nave, up to the new first floor level and providing additional space for the museum's cultural programs.

The natural finish of the timber shares a close tonal similarity with the existing limestone walls, complimenting the original decorative accents, such as the stained glass windows, mahogany and vaulted ceilings.

The architects were drawn towards CLT due to the constraints of the existing fabric and archeology of the church. The structural components of the design were limited by what could be brought into the church, and how they could be maneuvered once inside the space. The designed was tailored to these dimensional constraints with widths limited to 20ft to allow the prefabricated panels to be brought in through the existing doors of the church. The structure was then assembled within the nave, the dry environment of which was particularly well suited to the physical characteristics of timber.

Due to the weight of CLT no additional foundations were required which ensured any archeology beneath the church could remain undisturbed.

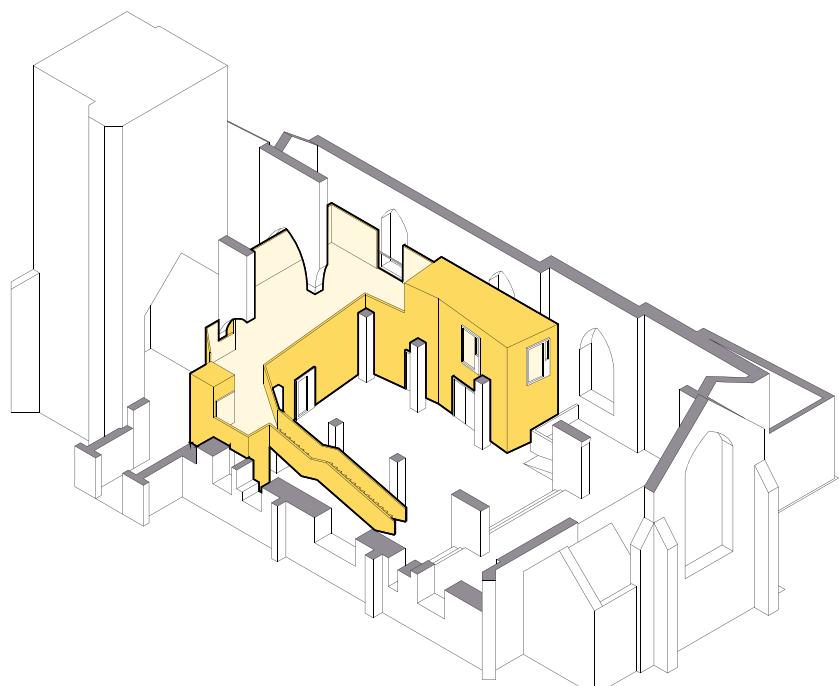

Sectional Axonometric



© Paul Raftery

2009      Public & Civic  
**JOHN HOPE GATEWAY**  
 Royal Botanic Garden Edinburgh

**LOCATION**  
 Edinburgh, Lothian

**HEIGHT / STOREYS**  
 34 ft (10.5 m) / 2 storeys

**CONSTRUCTION COST**  
 £10.7 million

**ARCHITECT**  
 Cullinan Studio

**STRUCTURAL ENGINEER**  
 BuroHappold Engineering

**TIMBER ENGINEER**  
 BuroHappold Engineering  
 / Techniker

**TIMBER CONTRACTOR**  
 Donaldson & McConnell

**TIMBER MANUFACTURER**  
 KLH Massivholz

**MAIN CONTRACTOR**  
 Xircon

**TIMBER VOLUME**  
 23,800 ft<sup>3</sup> (674 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 23 weeks

**OVERALL CONSTRUCTION**  
 95 weeks

**STRUCTURE TYPE**  
 Hybrid

**EMBODIED CARBON  
 WITHIN TIMBER\***  
 -403 tons (-366 tonnes) CO<sub>2</sub>


**CLT FACT**  
 This project was the first  
 use of CLT for a public  
 building in Scotland


As the 'front door' to one of the world's leading botanical institutions, the building captures the spirit of the Royal Botanic Garden Edinburgh, communicating the energy and enthusiasm for the world of plants that drives the scientists and researchers.

Respecting the pre-eminence of the Garden, the architecture frames views and is woven into the contours and routes of the landscape, defining the threshold of a compelling journey to come. A striking 'floating' timber canopy celebrates the concept of a gateway and the desire for a demonstrably timber building.

This timber canopy is designed to create coffered roof spaces that give an individual identity to the restaurant and other areas. Floating over the entire building as a single horizontal timber plane it is formed from CLT panels supported by a diagonal lattice of 117 exposed tapered glulam beams.

The roof beams are bolted to steel flitch plates with the bolts in a circular pattern connecting to the most slender columns possible, composed of four steel angles. Columns of this nature have been used historically to create compression elements of minimum material, yet here they are expressed and celebrated, allowing glimpses through the column and portraying a fluted form to emphasize their verticality.

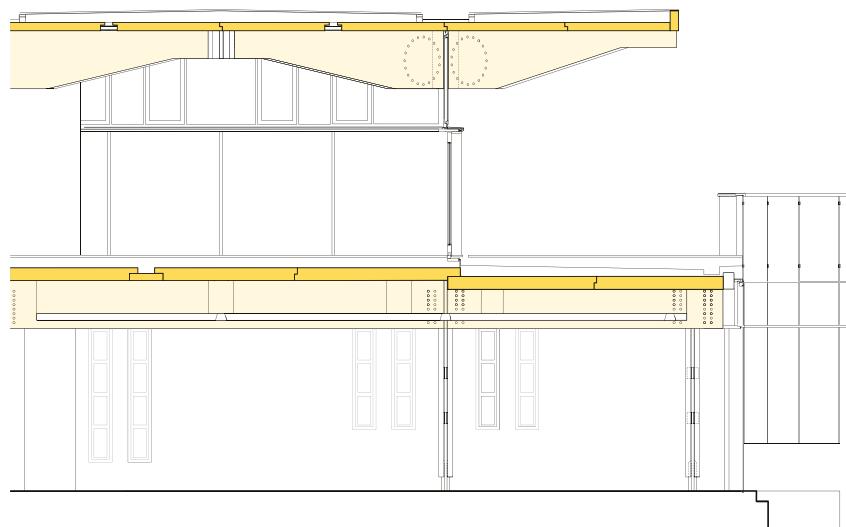

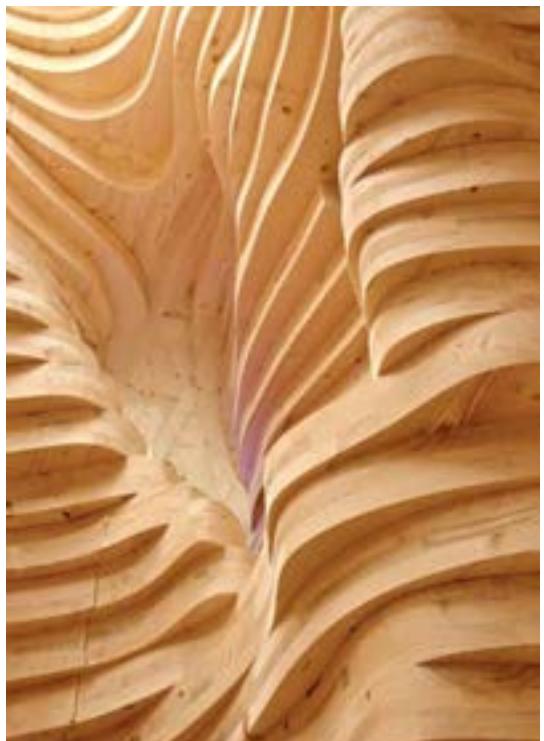

© Joseph Burns

2009      Public & Civic  
**THE TERMITE PAVILION**  
 Festival

**LOCATION**  
 Temporary installation

**HEIGHT / STOREYS**  
 20 ft (6.1 m) / 1 storey

**CONSTRUCTION COST**  
 Undisclosed

**ARCHITECT**  
 Softroom Limited

**STRUCTURAL ENGINEER**  
 Atelier One

**TIMBER ENGINEER**  
 Atelier One

**TIMBER CONTRACTOR**  
 KLH UK

**TIMBER MANUFACTURER**  
 KLH Massivholz

**MAIN CONTRACTOR**  
 KLH UK

**TIMBER VOLUME**  
 6,800 ft<sup>3</sup> (192 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 2 days

**OVERALL CONSTRUCTION**  
 2 days

Built for the insect inspired festival, Festival, the Termite Pavilion is a 20 foot cube, walk-in structure based on a three dimensional scan of an actual termite mound in Namibia. Scaled up fifteen times to allow humans to move through it, the installation features sound recordings from inside a termite mound and lighting that dims and brightens to emulate breathing.

The scan was created by pouring gypsum into the termite mound, then physically slicing the mound in 1mm horizontal increments for digital capture. To optimize the panel use, the computer model was sliced horizontally into 51 layers, each of which became the template for the CNC routing of the complex internal profiles of the termite mound onto the CLT.


Formed in blocks of six layers of maximum size of 8 foot, due to transport constraints, the pieces were lifted into place, bearing on top of each other and aligned in place with vertical threaded bars and horizontally with bolted connections. The overall structure is stable under its own weight, nevertheless some vertical ties were required to counteract local overturning of some blocks cantilevering at the top of the pavilion.

A CLT and plywood plinth forms a base for the structure transferring loads to the existing pavement and providing level access for visitors into the pavilion.

**STRUCTURE TYPE**  
 Pure CLT

**EMBODIED CARBON  
WITHIN TIMBER\***  
 -120 tons (-109 tonnes) CO<sub>2</sub>e

**CLT FACT**  
 CNC routing facilitated  
 replication of complex  
 organic form

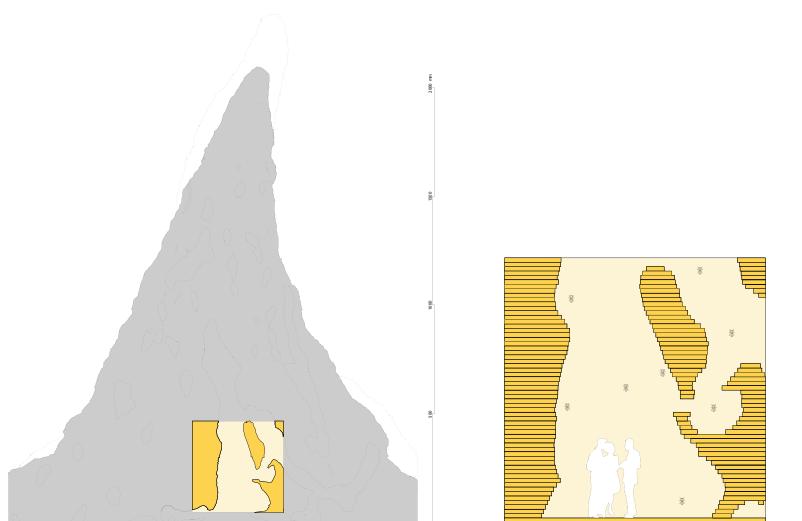

Section



© Bennetts Associates



© Bennetts Associates



© Peter Cook

2010      Public & Civic  
**ROYAL SHAKESPEARE THEATRE**  
 The Royal Shakespeare Company

**LOCATION**  
 Stratford-upon-Avon,  
 Warwickshire

**HEIGHT / STOREYS**  
 118 ft (36 m) / 3 storeys

**CONSTRUCTION COST**  
 £57.7 million

**ARCHITECT**  
 Bennetts Associates

**STRUCTURAL ENGINEER**  
 BuroHappold Engineering

**TIMBER ENGINEER**  
 BuroHappold Engineering

**TIMBER CONTRACTOR**  
 KLH UK

**TIMBER MANUFACTURER**  
 KLH Massivholz

**MAIN CONTRACTOR**  
 Mace

**TIMBER VOLUME**  
 23,200 ft<sup>3</sup> (658 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 6 weeks

**OVERALL CONSTRUCTION**  
 159 weeks

**STRUCTURE TYPE**  
 Hybrid

**EMBODIED CARBON  
 WITHIN TIMBER\***  
 -404 tons (-367 tonnes) CO<sub>2</sub>


**CLT FACT**  
 A significant cost saving  
 was made by reduced  
 mini pile foundations

Purpose-built in the 1930s the Royal Shakespeare Theatre has a picturesque riverside site in Stratford-upon-Avon. For 70 years the building's lack of foyer space hampered the work of the theatre. This project involved rebuilding and transforming the existing, Grade II\* listed, theatre buildings and incorporating a brand new auditorium.


The design focused on creating stronger connections between actors, audiences, building, and town with significant changes to the theatre required to re-organize the public spaces. A new auditorium was conceived where nobody would sit more than 50ft from the stage. The building was opened on all four sides, creating additional foyers and linking them to a wider masterplan which positively connected the theatre to the town.

A lightweight solution was required to allow for the insertion of a new auditorium space to be partially carried on existing walls. A hybrid steel and CLT frame, connecting in some places to the retained historic masonry, was designed for some of the key new-build elements including the four storey dressing room block and new foyer spaces.

The lighter weight of the timber allowed the use of mini-piles removing the requirement for significant temporary works associated with creating a piling platform over the river.

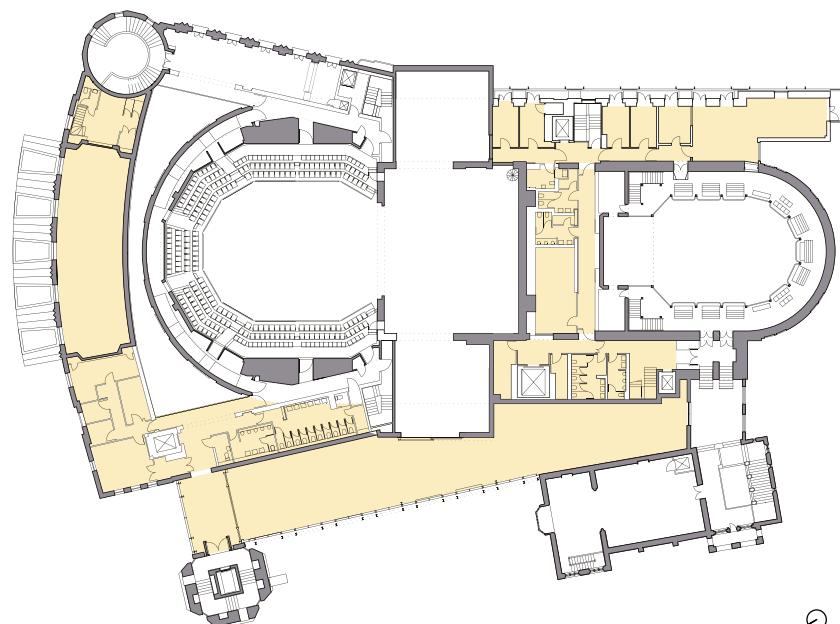

Section

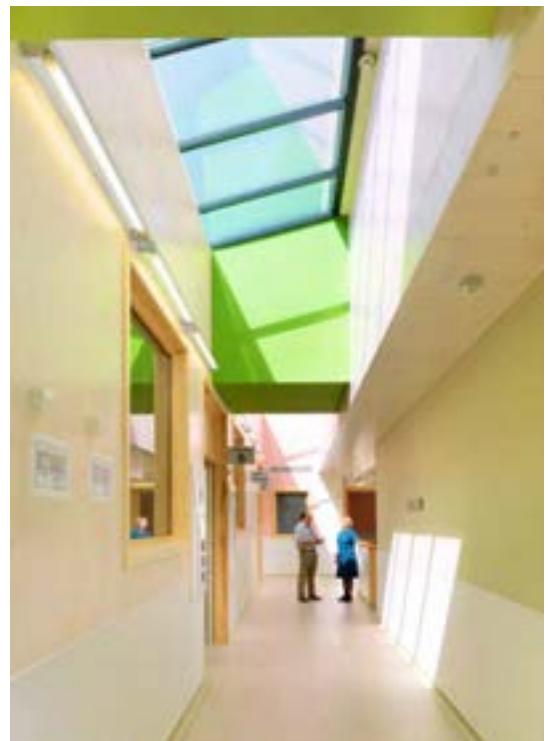

© Craig Auckland Fotohaus

2011 Public & Civic (Healthcare)  
**DYSON CENTRE FOR NEONATAL CARE**  
Royal United Hospital

**LOCATION**  
Bath, Somerset

**HEIGHT / STOREYS**  
21 ft (6.3 m) / 1 storey

**CONSTRUCTION COST**  
£3 million

**ARCHITECT**  
Feilden Clegg Bradley  
Studios

**STRUCTURAL ENGINEER**  
BuroHappold Engineering

**TIMBER ENGINEER**  
BuroHappold Engineering  
/KLH UK

**TIMBER CONTRACTOR**  
KLH UK

**TIMBER MANUFACTURER**  
KLH Massivholz

**MAIN CONTRACTOR**  
Vinci Construction

**TIMBER VOLUME**  
11,600 ft<sup>3</sup> (329 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
3.5 weeks

**OVERALL CONSTRUCTION**  
52 weeks

**STRUCTURE TYPE**  
Pure CLT

**EMBODIED CARBON  
WITHIN TIMBER\***  
-203 tons (-184 tonnes) CO<sub>2</sub>


**CLT FACT**  
First use of CLT in tertiary  
healthcare environment


The Dyson neo-natal care centre was the first use of solid laminated timber in a tertiary healthcare environment. This single storey extension was designed to support the 'developmental care' model, providing space and privacy for parents to engage with their babies. The layout is intended to be legible to users with a clear, spiral progression around the central staff base, from intensive care through to special care.

The unit has been designed to provide the spaces with a visual connection to the outside, the changing day and seasons whilst minimizing reliance on artificial light. This controlled daylight provides an excellent working environment whilst allowing babies to develop an awareness of the diurnal cycle.

The timber solution provided a quick, clean and quiet form of construction; essential in an acute healthcare environment. It also provided an opportunity to challenge healthcare construction, and look at a more sustainable material with a low embodied energy.

A palette of natural materials alongside the exposed CLT creates a sense of calm bringing warmth and tactility to the clinical facility. Combined with the quality of daylight and sunlight, this helps lower stress levels and lifts the spirits of the parents, staff and infants being treated.

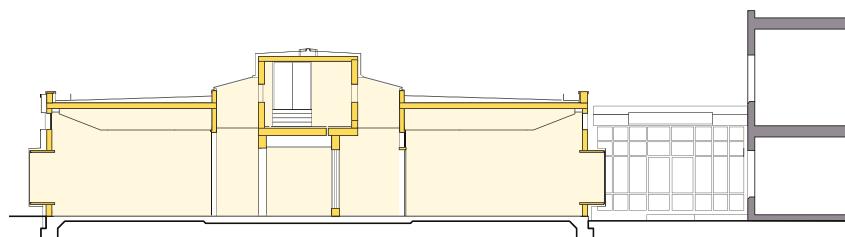

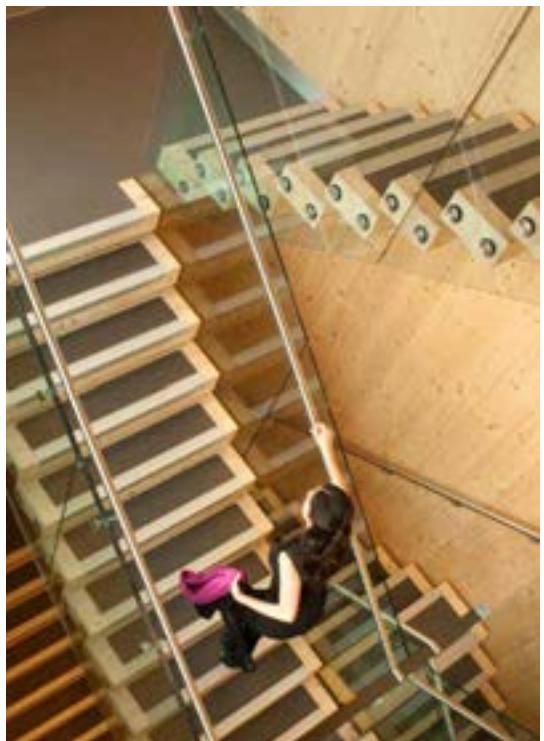

© Alex de Rijke / dRMM

**LOCATION**  
Blackpool, Lancashire

**HEIGHT / STOREYS**  
47 ft (14.4 m) / 3 storeys

**CONSTRUCTION COST**  
Undisclosed

**ARCHITECT**  
dRMM

**STRUCTURAL ENGINEER**  
Michael Hadi Associates

**TIMBER ENGINEER**  
Michael Hadi Associates

**TIMBER CONTRACTOR**  
Züblin Timber (formerly  
Finnforest Merk)

**TIMBER MANUFACTURER**  
Züblin Timber (formerly  
Finnforest Merk)

**MAIN CONTRACTOR**  
Parkinson Building  
Contractor

**TIMBER VOLUME**  
12,700 ft<sup>3</sup> (360 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
4.5 weeks

**OVERALL CONSTRUCTION**  
65 weeks

**STRUCTURE TYPE**  
Pure Timber

**EMBODIED CARBON  
WITHIN TIMBER\***  
-221 tons (-200 tonnes) CO<sub>2</sub>


**CLT FACT**  
The first public registry  
office in the UK to be  
built from CLT

Commissioned as a new landmark that would celebrate Blackpool's confidence as a traditional seaside resort, the 'Tower of Love' pavilion was the first building built on the Golden Mile for a great many years. It provides a focal point for visitors; a large restaurant and local information office at promenade level, with registry offices and ceremony hall above.

Designed as a 'useful sculpture,' the structure is a 'telescopic' wedding tower. A vertical view of Blackpool Tower frames the space in which couples exchange vows, while horizontal views of the Irish Sea are created in the Registry, reception, roof terrace and restaurant.


Blackpool is an extremely demanding marine environment. High wind speeds, constant driven rain and sand, extreme weather patterns, high humidity and extreme general exposure all contribute to one of the most robust environmental contexts in the UK. The architectural content of the Tower Festival Headland responds in an equally robust manner.

Standing on a stepped concrete plinth containing recycled and phosphorescent glass, the CLT building is deliberately eye-catching. Clad in golden stainless steel shingles the form and detailing is a celebration of Blackpool's renowned exuberance, combining the bracing coastal weather with sustainable construction and a sensual, wooden interior.

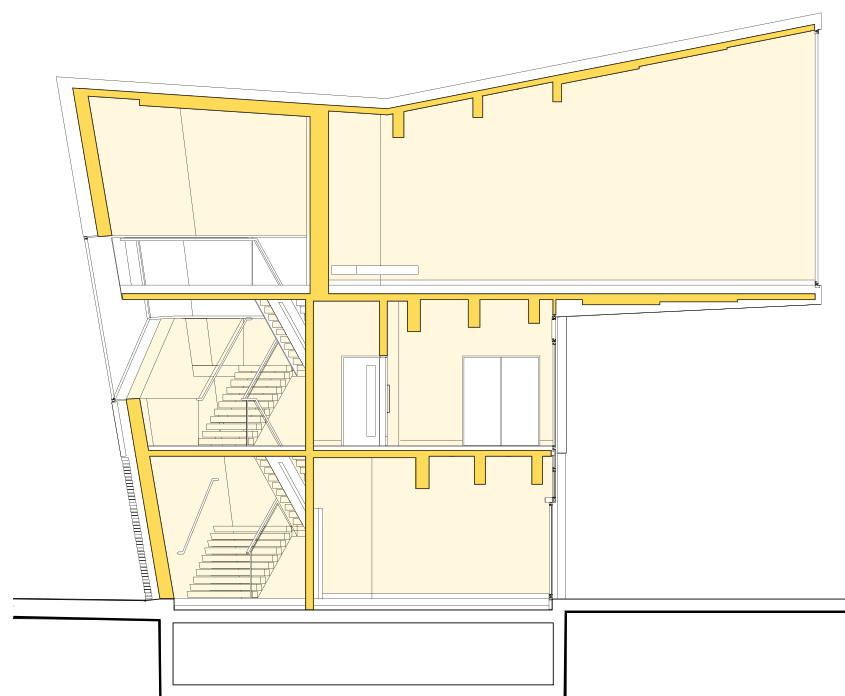



© Hufton + Crow

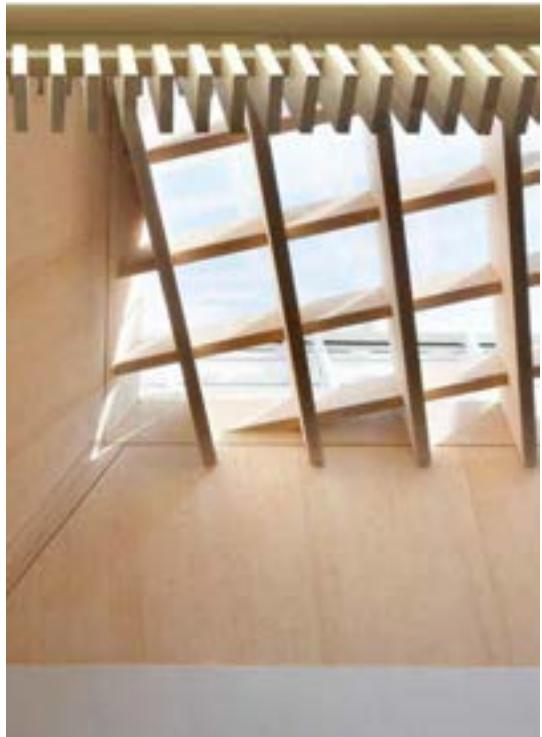

© Hufton + Crow



© Feilden Clegg Bradley Studios

**LOCATION**  
 Worcester,  
 Worcestershire

**HEIGHT / STOREYS**  
 88 ft (26.8 m) / 5 storeys

**CONSTRUCTION COST**  
 £35.8 million

**ARCHITECT**  
 Feilden Clegg Bradley  
 Studios

**STRUCTURAL ENGINEER**  
 Hyder Consulting (UK)  
 Ltd / Atelier One

**TIMBER ENGINEER**  
 Atelier One

**TIMBER CONTRACTOR**  
 KLH UK

**TIMBER MANUFACTURER**  
 KLH Massivholz

**MAIN CONTRACTOR**  
 Galliford Try

**TIMBER VOLUME**  
 55,100 ft<sup>3</sup> (1,559 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 17 weeks

**OVERALL CONSTRUCTION**  
 104 weeks

**STRUCTURE TYPE**  
 Hybrid

**EMBODIED CARBON  
 WITHIN TIMBER\***  
 -950 tons (-862 tonnes) CO<sub>2</sub>


**CLT FACT**  
 Compatability with  
 software allowed fine  
 tuning of the roof form

The Hive is the first fully integrated public and university library in the UK. This cultural centre is home to an academic library for students, a public library, the county archives, and a local history centre.

Positioned on the riverbank, the building is designed as a counterpoint to the city cathedral and a beacon for learning. An extruded roof is formed of a series of irregular laminated timber cones that echo the undulating ridgeline of the Malverns and the historic kilns of the Royal Worcester Pottery. The cones divide the building into a series of conjoined blocks reflecting the arrangement of rooms within. Parametric software was developed during the project to manage the fine tuning of the complex roof geometries to optimize natural lighting and ventilation throughout the building.

The interior is conceived as a 'social landscape'. A series of balconies, staircases and ramps allow users to move around the building freely. The central atrium's double height, ash-lined interior brings the timber of the roof into the heart of the building.

Sustainability was a high priority throughout. The CLT roof generated a saving of more than 2,200 tons of CO<sub>2</sub> compared to the initial design in steel. Water from the river Severn provides peak cooling and locally sourced biomass provides heating.

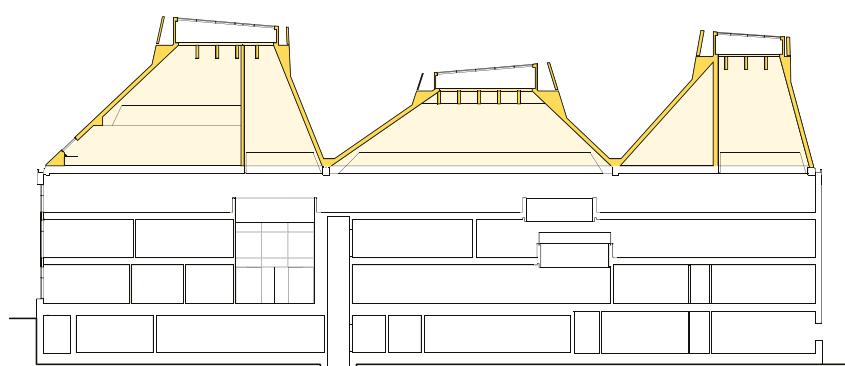

Section



© Martine Hamilton Knight

2012 Sports & Leisure (Public & Civic)  
**VICTORIA LEISURE CENTRE**  
Nottingham City Council

**LOCATION**  
Nottingham,  
Nottinghamshire

**HEIGHT / STOREYS**  
23 ft (7 m) / 3 storeys

**CONSTRUCTION COST**  
£5.5 million

**ARCHITECT**  
Levitate

**STRUCTURAL ENGINEER**  
Furness Partnership

**TIMBER ENGINEER**  
B & K Structures

**TIMBER CONTRACTOR**  
B & K Structures

**TIMBER MANUFACTURER**  
Binderholz

**MAIN CONTRACTOR**  
Carillion Building

**TIMBER VOLUME**  
1,800 ft<sup>3</sup> (50 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
1 week

**OVERALL CONSTRUCTION**  
70 weeks

**STRUCTURE TYPE**  
Hybrid

**EMBODIED CARBON  
WITHIN TIMBER\***  
-31 tons (-28 tonnes) CO<sub>2</sub>e


**CLT FACT**  
CLT and glulam roof  
used in high humidity  
environment

Unable to restore the original Victorian bath house to contemporary standards, the decision was made to pursue a hybrid option that retained the 1890s clock tower as the entrance to a new state of the art facility, with a community pool, fitness suite and café.

The new façade is designed to sit in harmony with the clock tower, while resolving level changes and edge conditions relating to the newly pedestrianized market square outside. Key to this is the concertina screen façade that exploits opacity and orientation, not only in response to key functional requirements such as the need to reduce glare for the lifeguards, but also in creating a balance between engagement and privacy.

The pool hall is designed to have a calm warmth. This is achieved by generous proportions, the use of natural materials for the roof structure, an abundance of controlled natural light, and an absence of ventilation paraphernalia. The roof structure is formed of glulam beams with CLT panels and, despite the high humidity of the space, timber offered a low maintenance solution.

Extensive physical and computer models were used to generate the concepts for the building and to ensure that they were delivered in a cost effective and efficient manner during the construction stage, which contributed to the project being completed several months ahead of schedule.

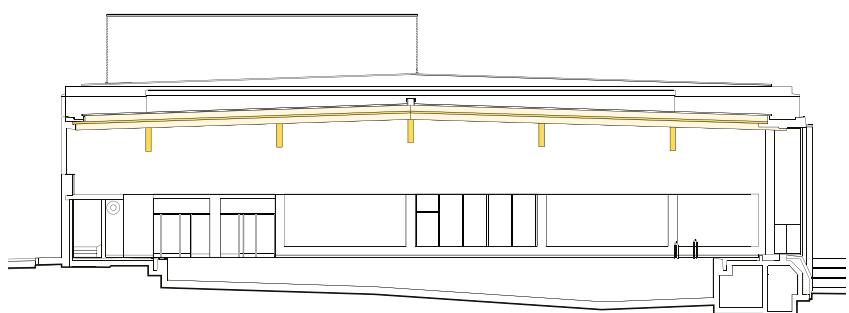

Section



© Philip Vile

2012

Public &amp; Civic

**REGENTS PARK OPEN AIR THEATRE**

The Open Air Theatre

**LOCATION**London Borough of  
Camden**HEIGHT / STOREYS**

18 ft (5.6 m) / 1-2 storeys

**CONSTRUCTION COST**

£1.9 million

**ARCHITECT**

Haworth Tompkins

**STRUCTURAL ENGINEER**

Price &amp; Myers

**TIMBER ENGINEER**

Eurban

**TIMBER CONTRACTOR**

Eurban

**TIMBER MANUFACTURER**

Stora Enso

**MAIN CONTRACTOR**

Ashe Construction

**TIMBER VOLUME**6,600 ft<sup>3</sup> (186 m<sup>3</sup>)**TIMBER ASSEMBLY**

3 weeks

**OVERALL CONSTRUCTION**

30 weeks

**STRUCTURE TYPE**


Hybrid

**EMBODIED CARBON  
WITHIN TIMBER\***-118 tons (-107 tonnes) CO<sub>2</sub>**CLT FACT**Weight of CLT reduced  
foundations protecting  
the roots of mature trees

The series of new timber buildings are designed to read as a coherent ensemble within Regent's Park. A black stained larch outer perimeter houses the backstage facilities and box office and forms a protective layer. Inside the perimeter the smaller structures are clad in natural timber. This combination of timbers being complimentary to the mature landscape setting, echoing the repetitive verticality of the trees they sit amongst.

On the backstage building the rough sawn dark larch cladding is cut back at window openings revealing vertical bands of finer, untreated timber. Along the north-west façade the windows are narrow but extend from desk height to soffit to maximize daylight penetration. Whilst their articulation may appear random, their positioning relates to the internal configuration. The window slots animate the façade and help to reduce the effects of light spillage after daylight hours, while the stage side elevations have limited fenestration to avoid potential light spillage towards the stage.

CLT was used as both a direct contextual reference to the surrounding trees, and for its environmental and practical advantages. The use of CLT panels allowed for construction within the 6-month window between theatre seasons and the lightweight structure required relatively small foundations, preserving the mature tree roots of the historic park. Exposed internally the use of CLT reduced wet trades on site, key for its natural setting.

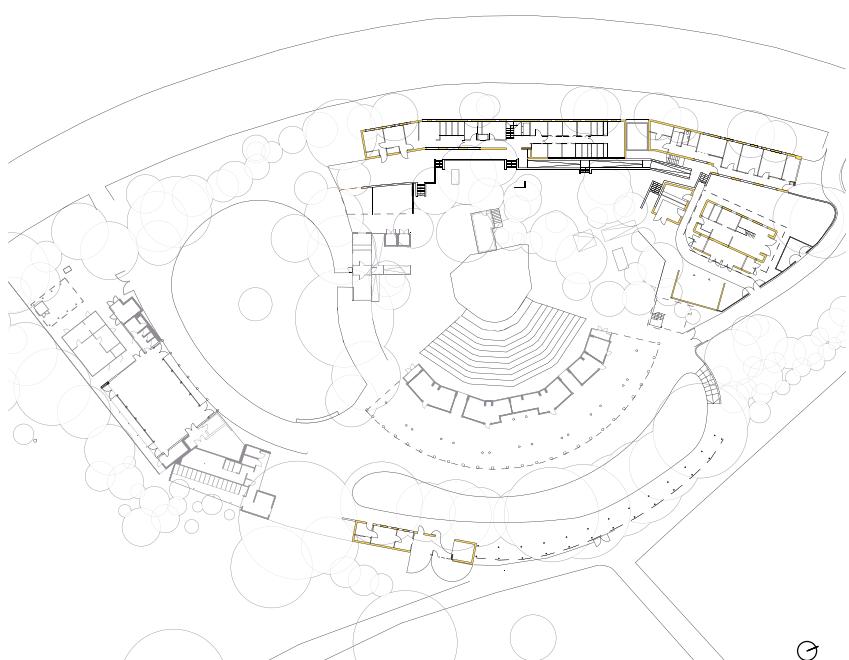

Ground Floor Plan



© Saville Jones Architects / Alphabetical

**LOCATION**  
 London Borough of  
 Bexley

**HEIGHT / STOREYS**  
 21 ft (6.3 m) / 2 storeys

**CONSTRUCTION COST**  
 £5.7 million

**ARCHITECT**  
 Saville Jones Architects

**STRUCTURAL ENGINEER**  
 Furness Partnership

**TIMBER ENGINEER**  
 KLH UK

**TIMBER CONTRACTOR**  
 KLH UK

**TIMBER MANUFACTURER**  
 KLH Massivholz

**MAIN CONTRACTOR**  
 Grehan Contractors

**TIMBER VOLUME**  
 10,600 ft<sup>3</sup> (300 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 2 weeks

**OVERALL CONSTRUCTION**  
 104 weeks

The Link is a world class youth facility, offering an exciting range of activities for the young people of Thamesmead. The facilities are ingeniously provided beneath a highway, the site being defined by a series of concrete arches supporting the fly-over above.

This previously undeveloped land that had been neglected and abused, presented a unique opportunity. To maximize the use of such an area and utilize the structure for shelter is a beautifully simple concept. The design explored how to turn this physical, 'hard' space into a carefully defined, tangible building focused on youth facilities providing a diversity of functions including a dance/drama studio, recording studio, climbing wall, fitness gym and a workshop for teaching motorcycle maintenance.


Due to the constraints imposed by the highway authorities, no structural loads could be asserted on the existing highway structure. As a result of this and the context, the method of construction was required to be light, pre-fabricated and easy to assemble. CLT pods are supported directly on glulam 'V' supports with no loads affecting the highway structure.

The building is bold and colorful, while materials chosen are 'softer' than the concrete that encloses them. Freestanding CLT pods and tensile fabric completes the spaces, and act as a curtain pulled across its façade.


**STRUCTURE TYPE**  
 Pure Timber

**EMBODIED CARBON  
 WITHIN TIMBER\***  
 -195 tons (-177 tonnes) CO<sub>2</sub>

**CLT FACT**  
 Timber offered a cost  
 and time saving over an  
 equivalent steel structure

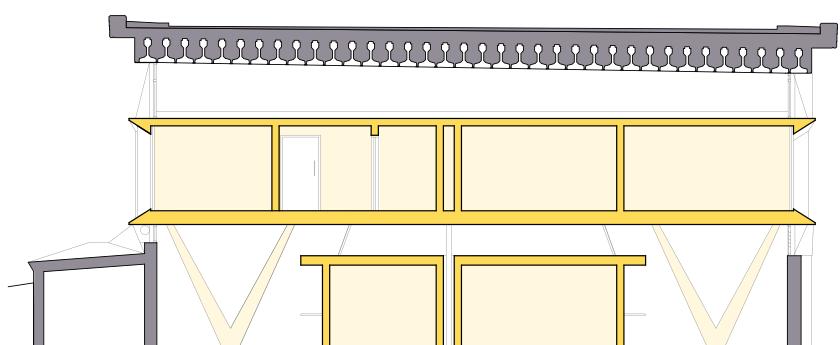

Section

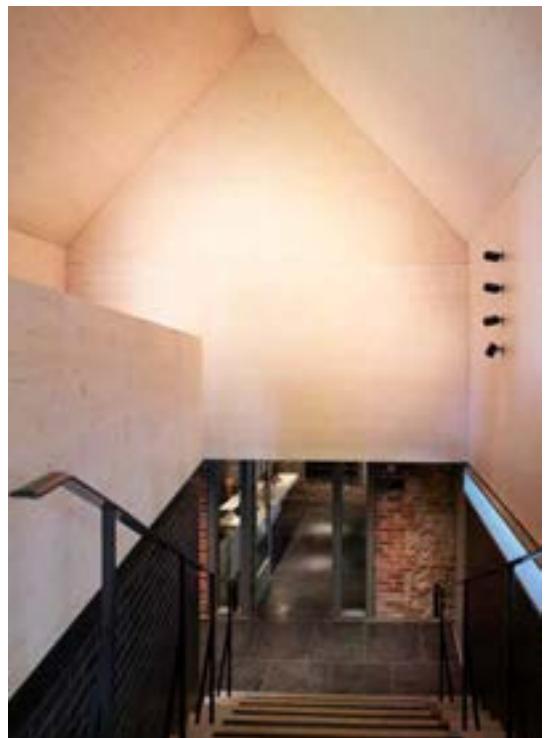

© Brotherton-Lock

2013 Public & Civic

## DITCHLING MUSEUM OF ART AND CRAFT

Ditchling Museum of Art & Craft

**LOCATION**  
Ditchling, East Sussex

**HEIGHT / STOREYS**  
23 ft (7 m) / 1 storey

**CONSTRUCTION COST**  
£1.2 million

**ARCHITECT**  
Adam Richards Architects

**STRUCTURAL ENGINEER**  
Price & Myers

**TIMBER ENGINEER**  
KLH UK

**TIMBER CONTRACTOR**  
KLH UK

**TIMBER MANUFACTURER**  
KLH Massivholz

**MAIN CONTRACTOR**  
Westridge Construction

**TIMBER VOLUME**  
2,500 ft<sup>3</sup> (72 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
1.5 weeks

**OVERALL CONSTRUCTION**  
60 weeks

**STRUCTURE TYPE**  
Pure CLT


**EMBODIED CARBON  
WITHIN TIMBER\***  
-44 tons (-40 tonnes) CO<sub>2</sub>e

**CLT FACT**  
CLT enabled creation  
of a large open volume  
without any cross-bracing

This project combines a disparate collection of existing buildings: a cottage, a Victorian school building, and a derelict cart lodge, to form a new museum of the Arts and Crafts Movement, within a historic village setting.


Sitting on the borders of the village green, and surrounded by listed buildings the new elements were designed to be sympathetic to the context without resorting to pastiche. Two new buildings were inserted between the cart lodge and the main galleries providing new facilities and connecting spaces. Internally the museum's orientation has been reversed with the cart lodge becoming a new entrance and cafe/shop. The first gallery space encountered within the museum is constructed in CLT. Chosen for its environmental credentials the use of CLT ensured the swift assembly of this new build element on site. Exposed within, the timber creates a warm welcoming atmosphere for the spaces of the museum, and speaks to the principles of 'truth to materials' that inspired the Arts & Crafts Movement.

The sustainability agenda for the scheme is evident in the refurbishment and reuse of the existing structures and the choice of low embodied carbon materials for the new elements. The new building is clad in high performance insulation and black zinc panels with serrated detailing. Both unusual and beautiful, this material has a long life-span, requires no maintenance and can be easily recycled at the end of its life.

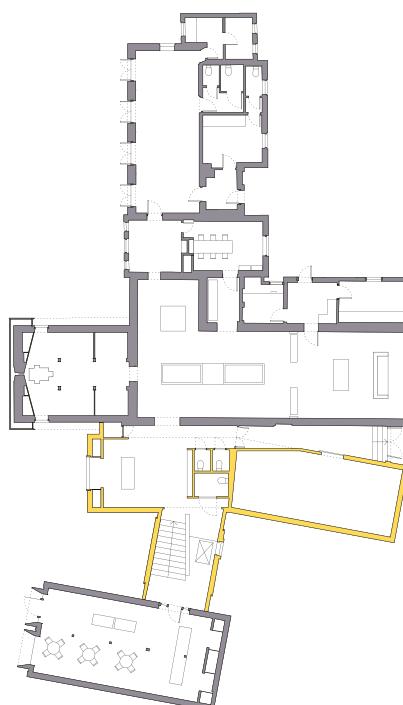

⊕

Ground Floor Plan

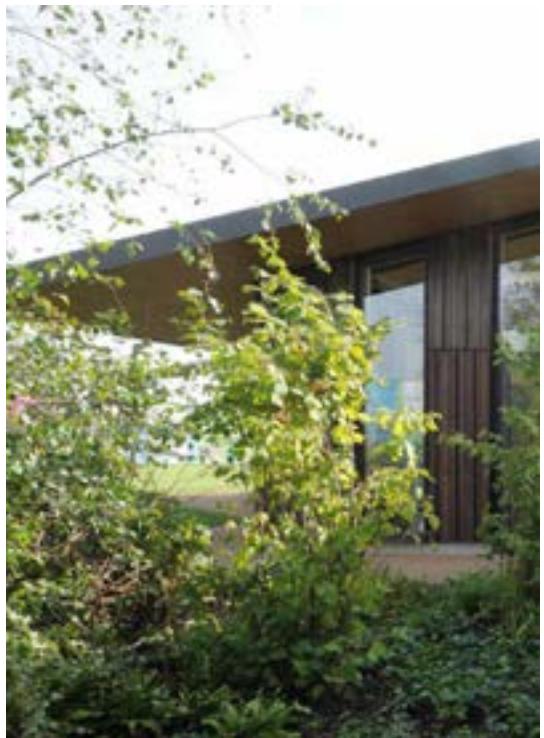

© David Grandorge

2013

Public &amp; Civic

**OLYMPIC PARK TIMBER LODGE**

London Legacy Development Corporation

**LOCATION**  
London Borough of Newham

**HEIGHT / STOREYS**  
18 ft (5.5 m) / 1 storey

**CONSTRUCTION COST**  
Undisclosed

**ARCHITECT**  
Erect Architecture

**STRUCTURAL ENGINEER**  
Entuitive (formerly TALL)

**TIMBER ENGINEER**  
Entuitive (formerly TALL)

**TIMBER CONTRACTOR**  
Zublin Timber (formerly Finnforest Merk)

**TIMBER MANUFACTURER**  
Zublin Timber (formerly Finnforest Merk)

**MAIN CONTRACTOR**  
BAM Nuttall

**TIMBER VOLUME**  
7,400 ft<sup>3</sup> (210 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
2.5 weeks

**OVERALL CONSTRUCTION**  
28 weeks

**STRUCTURE TYPE**  
Pure Timber


**EMBODIED CARBON WITHIN TIMBER\***  
-132 tons (-120 tonnes) CO<sub>2</sub>

**CLT FACT**  
CLT allowed roof overhang without downstand beams

Designed as a community hub the timber lodge and surrounding play area are a continuation of the landscaped Olympic Park with its large-scale buildings, powerful and fluid landforms, sweeps of planting and its focus on connectivity, movement and ecology.

The lodge contains a café, community space and public toilet provision for the north park. Located at the intersection of main pedestrian and cycle pathways, the café enjoys views in three directions with the community room opening on to the intimate grass lawn enclosed by hazel woodlands. Designed as integral to the landscape, landforms and planting conceal and reveal the lodge building as visitors move through the park. The boundary between internal and external spaces is merged, the spaces relating to each other and the wider context of the park.

The structure is CLT with the panels used to their full structural capacity to provide covered external space underneath slender cantilevering roof overhangs, that would otherwise have required downstand beams. The rhythm of the façade reads as natural extension of the multi-stem hazel woodland. Whilst inside the exposed CLT is complemented by pale timber furnishings and large windows provides a light, airy space which retains a connection to the park outside.

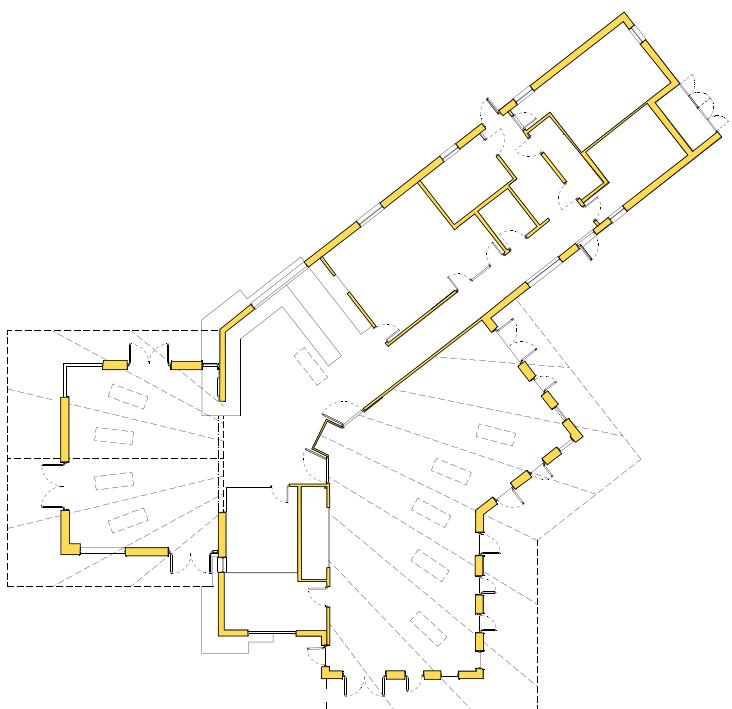

Ground Floor Plan



© Anthony Hurren



© Mike Tonkin



© Anthony Hurren

2014

Public & Civic

## GLOWING ORCHARD

Kingston upon Thames Council

**LOCATION**

Royal Borough of  
Kingston upon Thames

**HEIGHT / STOREYS**  
9 ft (2.8 m) / 1 storey

**CONSTRUCTION COST**  
£320,000

**ARCHITECT**  
Tonkin Liu

**STRUCTURAL ENGINEER**  
Rodrigues Associates

**TIMBER ENGINEER**  
Rodrigues Associates

**TIMBER CONTRACTOR**  
KLH UK

**TIMBER MANUFACTURER**  
KLH Massivholz

**MAIN CONTRACTOR**  
Balfour Beatty

**TIMBER VOLUME**  
1,200 ft<sup>3</sup> (34 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
6 weeks

**OVERALL CONSTRUCTION**  
24 weeks

**STRUCTURE TYPE**  
Hybrid

**EMBODIED CARBON  
WITHIN TIMBER\***  
-19 tons (-17 tonnes) CO<sub>2</sub>


**CLT FACT**  
CNC routing allowed  
the design of 'orchards'  
through perforations


Consisting of 75,000 square feet of public space and 26 market stalls ranging from fishmongers, butchers and greengrocers, to bread-makers and lunchtime food stalls, the market in Kingston upon Thames is one of the oldest in the UK with surviving records that date back to the early thirteenth century. The insertion of a series of new timber structures have diversified the ancient market place, which can now be used in the evening for dining, and performances, breathing new life into an area which had been largely abandoned by the local community.

The configuration and layout of these new market stalls adhere to the strict mechanics and psychology of markets, and the stalls themselves are adaptable for different displays and produces as the nature of markets dictates that proprietors will change over time.

Chosen for its visual reference to Tudor timber structures as well as its durability, adaptability, and tactility, the texture and color of the untreated CLT is visually harmonious with the architectural heritage of the Market House at the centre of the ancient Market Place.

The CNC routed perforation across the roof and wall panels becomes a light artwork when dusk falls transforming the stalls into lanterns, and creating a new sense of place, a "Glowing Orchard".

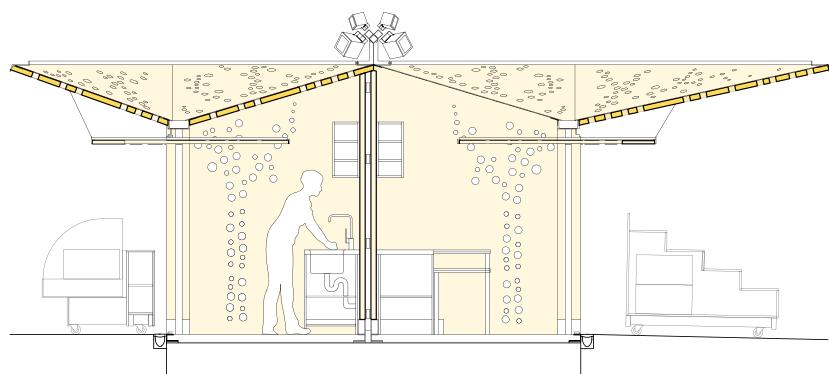

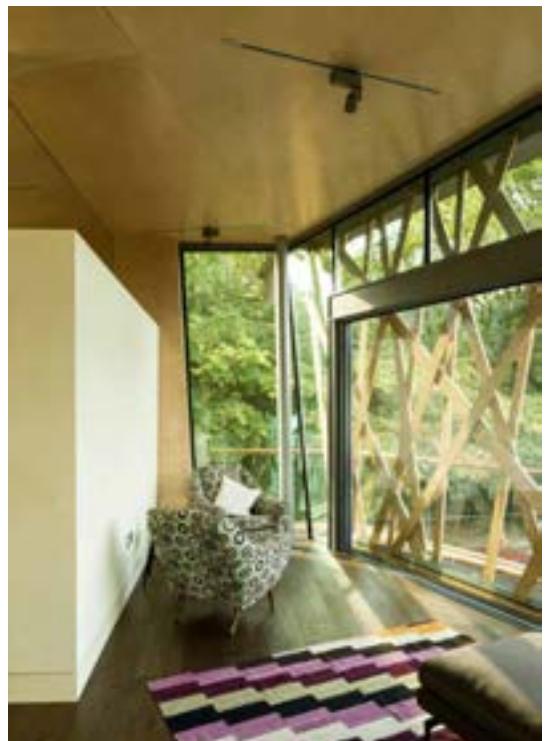

© WilkinsonEyre

**LOCATION**  
Oxford, Oxfordshire

**HEIGHT / STOREYS**  
26 ft (8 m) / 1 storey

**CONSTRUCTION COST**  
Undisclosed

**ARCHITECT**  
WilkinsonEyre

**STRUCTURAL ENGINEER**  
Alan Baxter Integrated  
Design

**TIMBER ENGINEER**  
Zublin Timber (formerly  
Finnforest Merk)

**TIMBER CONTRACTOR**  
Zublin Timber (formerly  
Finnforest Merk)

**TIMBER MANUFACTURER**  
Zublin Timber (formerly  
Finnforest Merk)

**MAIN CONTRACTOR**  
Jacksons Contracting

**TIMBER VOLUME**  
7,100 ft<sup>3</sup> (200 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
5 weeks

**OVERALL CONSTRUCTION**  
61 weeks

**STRUCTURE TYPE**  
Pure Timber

**EMBODIED CARBON  
WITHIN TIMBER\***  
-125 tons (-113 tonnes) CO<sub>2</sub>


**CLT FACT**  
Different timber products  
used in hybrid to their  
individual advantages

Inspired by the concept of a tree house, this Maggie's Centre floats amongst the trees adjacent to the oncology unit of the Churchill Hospital in Oxford. 13 feet above the ground in a small copse of mature trees, the building interacts with and embraces nature.

The angular geometry of the architectural form brings movement and life to the spaces, creating a building that feels warm, friendly and tranquil, rather than corporate or clinical. Consciously domestic in scale, the spaces within the centre are inviting, offering quiet places to retreat and reflect.

In keeping with the woodland setting the structure and cladding of the building is primarily timber. The building utilizes the strengths of the individual timber products to best serve the structural requirement. This combination of components enables the building to cantilever and float above the ground towards the tree canopies.

Raised from the ground on solid glulam columns, grouped in informal clusters to echo the surrounding woodland, the CLT panel floor creates a solid platform and a robust perimeter edge for the connection of level access balconies and the timber clad pedestrian bridge to the road. A folding three-dimensional LVL roof extends seamlessly throughout the building, sailing over the external balconies providing shelter and shading.

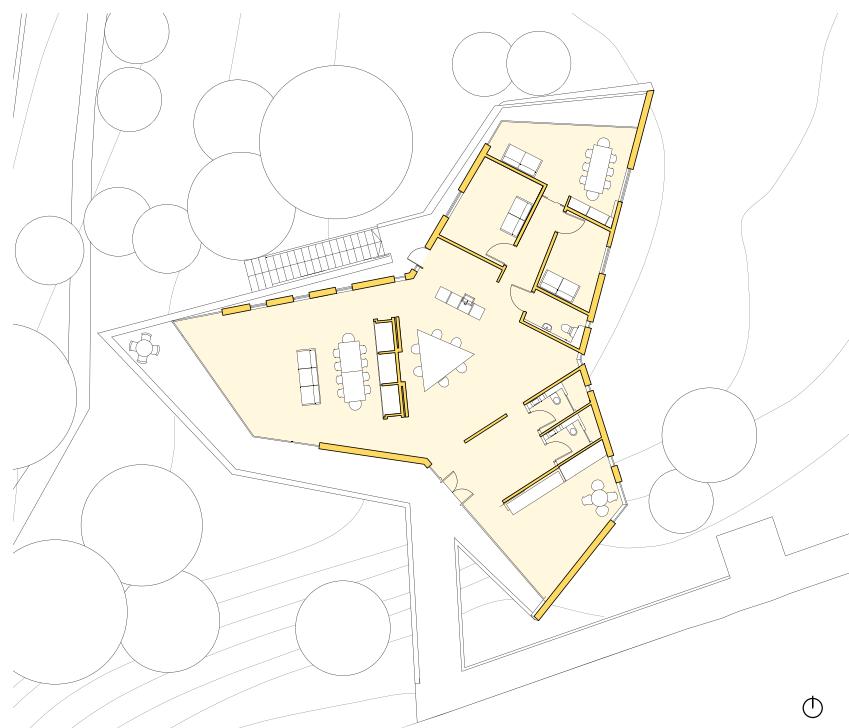

First Floor Plan in Context



© Matthew Lloyd Architects



© Matthew Lloyd Architects



© Ben Luxmoore

2015

Public & Civic

## FRAMPTON PARK BAPTIST CHURCH

Frampton Park Baptist Church / Telford Homes

**LOCATION**  
London Borough of  
Hackney

**HEIGHT / STOREYS**  
67 ft (20.5 m) / 3 storeys

**CONSTRUCTION COST**  
£2.5 million

**ARCHITECT**  
Matthew Lloyd Architects

**STRUCTURAL ENGINEER**  
RCA Structural Engineers  
/ Price & Myers

**TIMBER ENGINEER**  
Price & Myers

**TIMBER CONTRACTOR**  
KLH UK

**TIMBER MANUFACTURER**  
KLH Massivholz

**MAIN CONTRACTOR**  
Telford Homes

**TIMBER VOLUME**  
17,000 ft<sup>3</sup> (482 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
6 weeks

**OVERALL CONSTRUCTION**  
69 weeks

**STRUCTURE TYPE**  
Hybrid

**EMBODIED CARBON  
WITHIN TIMBER\***  
-315 tons (-286 tonnes) CO<sub>2</sub>


**CLT FACT**  
Developer's previous  
experience with CLT led  
to its proposal

Frampton Park Baptist Church and apartments occupy the former site of a 1950s church. The new church, café and community facilities have been funded through the sale of the 47 apartments. The church and community facilities occupy a prominent position on Frampton Park Road, satisfying the need to be visible and welcoming. The entrance is marked by a soaring tower, a cross etched into the corner which is illuminated at night.

Sitting alongside the church entrance is a light-filled two-storey cafe with glazed openings onto the green space.

The cafe acts as the primary hub of the building and offers visual connections to much of the interior, including the youth club, project rooms, kitchen and offices. The worship space occupies the lofty, pitched-roof third storey. Daylight flows through skylights cut into the apex of the main roof and a smaller, asymmetrically appended side aisle with a raised stage. The aisle and hall can be subdivided into two separate rooms, while sports-pitch markings on the floor hint at the flexible use of this space.

The Church and community facilities are constructed in CLT. The CLT is left exposed internally providing warmth and a robust finish, of particular importance in a building used extensively by children and young people.

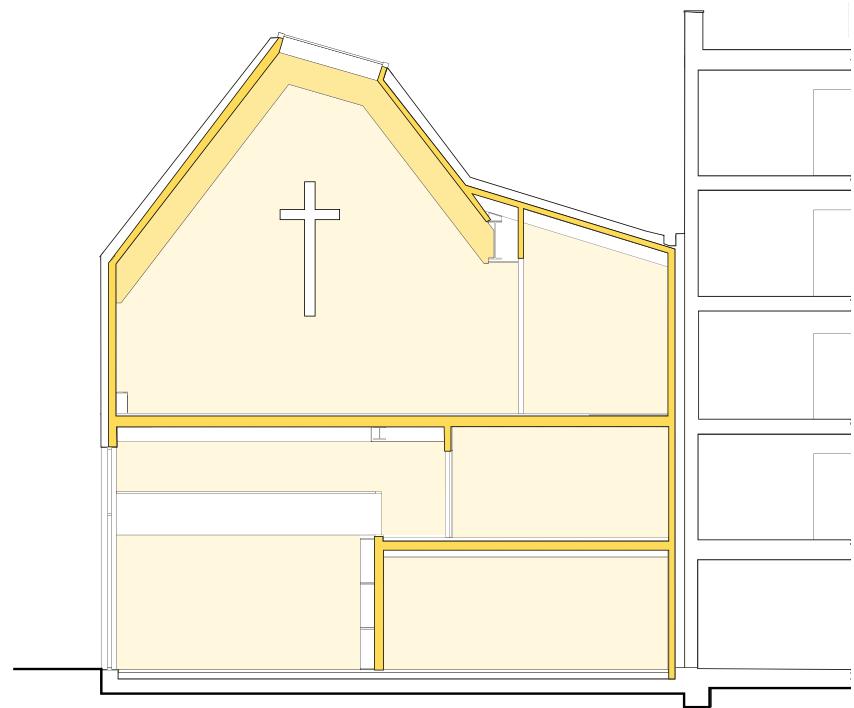

Section



© Hélène Binet

2016

Public & Civic

## CHATHAM COMMAND OF THE OCEANS

Chatham Historic Dockyard Trust

**LOCATION**  
Chatham, Kent

**HEIGHT / STOREYS**  
39 ft (12 m) / 1 storey

**CONSTRUCTION COST**  
£8 million

**ARCHITECT**  
Baynes and Mitchell

**STRUCTURAL ENGINEER**  
Price & Myers

**TIMBER ENGINEER**  
EgoIn

**TIMBER CONTRACTOR**  
EgoIn

**TIMBER MANUFACTURER**  
EgoIn

**MAIN CONTRACTOR**  
WW Martin

**TIMBER VOLUME**  
2,400 ft<sup>3</sup> (67 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
2 weeks

**OVERALL CONSTRUCTION**  
78 weeks

**STRUCTURE TYPE**  
Pure Timber

**EMBODIED CARBON  
WITHIN TIMBER\***  
-41 tons (-37 tonnes) CO<sub>2</sub>


**CLT FACT**  
Timber solution as a  
modern interpretation of  
surrounding structures


Bringing a new lease of life to the historic buildings whilst retaining the character of the Chatham's Historic Dockyard this new build element provides an entrance to the former workshops, repurposed as galleries telling the story of the expansion of the British Empire during the Age of Sail.

The cathedral like entrance hall completes a range of irregular sheds with its slender, pitched roof. A palette of black metal, blue limestone, board-marked concrete and composite timber respond to the industrial language of the historic surroundings but also contrasts with the whitewashed sheds.

Always intended to be timber, the new building's entirely exposed structure is a modern interpretation of the surrounding timber framed buildings. CLT roof panels span between glulam scissor trusses supported on glulam tie beams and columns on a concrete base. The structural grid is twice that of the adjacent Wheelwrights Shop, allowing simple repetition of elements to create a rich spatial experience that echoes this nearby volume.

The 20 foot wide, 98 foot long gap between the Wheelwrights Shop and Grade I listed Mast House was 3D scanned to create a highly accurate computer model of the site. This combined with the accuracy of prefabrication of the timber structure ensured the success of this 'infill' project.

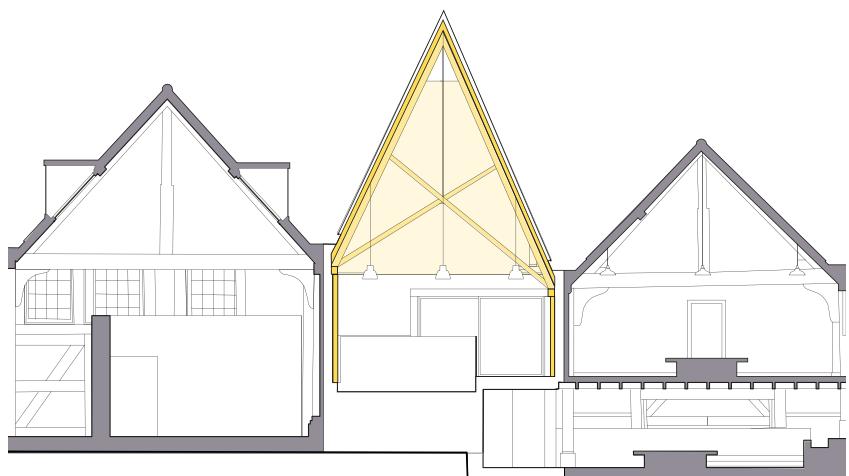

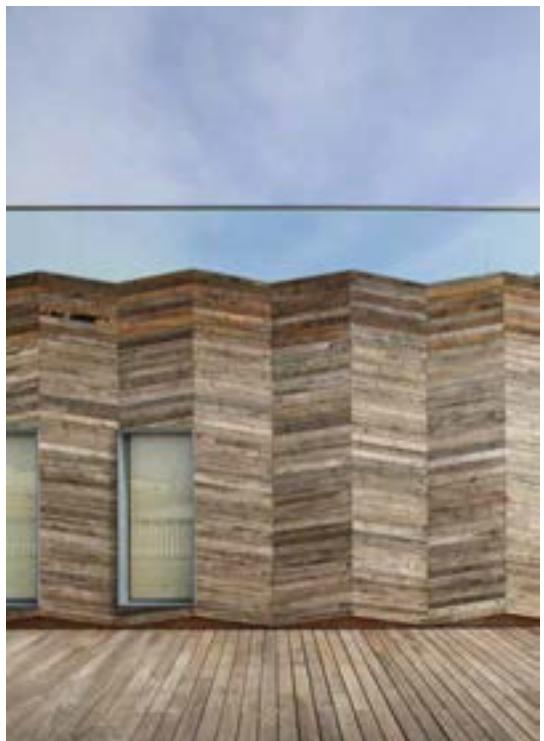

© Alex de Rijke / dRMM

2016      Public & Civic  
**VISITOR CENTRE, HASTINGS PIER**  
 Hastings Pier Charity

**LOCATION**  
 Hastings & St Leonards,  
 Sussex

**HEIGHT / STOREYS**  
 23 ft (6.9 m) / 1 storey

**CONSTRUCTION COST**  
 £1.2 million (+£700,000  
 support structure)

**ARCHITECT**  
 dRMM

**STRUCTURAL ENGINEER**  
 Ramboll

**TIMBER ENGINEER**  
 KLH UK

**TIMBER CONTRACTOR**  
 KLH UK

**TIMBER MANUFACTURER**  
 KLH Massivholz

**MAIN CONTRACTOR**  
 Hastings Pier Charity

**TIMBER VOLUME**  
 6,200 ft<sup>3</sup> (176 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
 3 weeks

**OVERALL CONSTRUCTION**  
 48 weeks

**STRUCTURE TYPE**  
 Pure Timber

**EMBODIED CARBON  
 WITHIN TIMBER\***  
 -109 tons (-99 tonnes) CO<sub>2</sub>

**CLT FACT**

First CLT structure to win the  
 RIBA Stirling Prize (2017)


With the original pier destroyed by fire in 2010, the redesign was an opportunity to redefine what a pier could be in 21st century. The visitor centre replaces the weakest, central section of the damaged pier and offers adaptable space for events, exhibitions and education, with an elevated panoramic lookout point.

A timber structural solution leant itself to this complex site where the physical constraints to construction were multiple: severe wind and rain, limited loadbearing capacity of the pier and access from the tidal sea.

The walls, stairs, lift and roof panels are CLT while glulam beams span the width of the centre and take loading for the roof terrace over the whole building.


CLT provided a relatively light alternative to steel and concrete which meant there could be a reduced thickness, weight and cost of the raft slab. This was important given that the building is supported on a steel structure projected out into the sea. CLT panels were easier to manoeuvre on the pier being lighter than other materials, a concern given the restrictions on loadings.

The first use of CLT in this kind of marine environment, the project demonstrates the material's ability to deal with extremes of humidity levels, salt and UV.

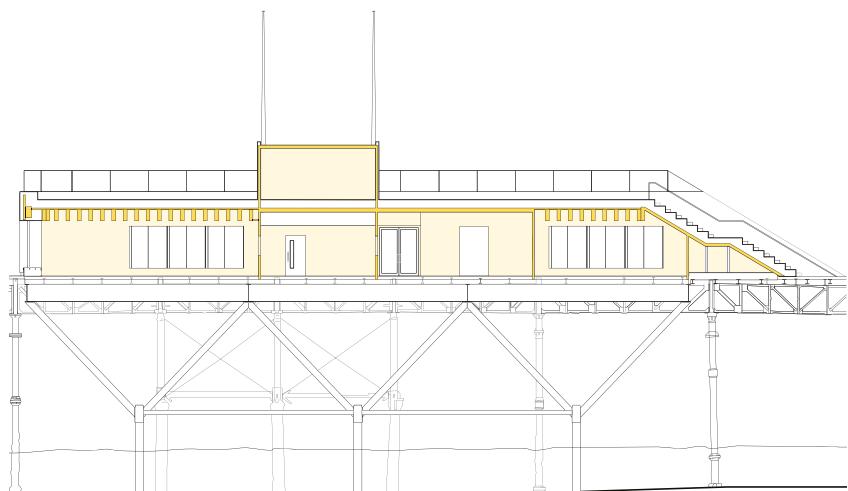



© Hélène Binet

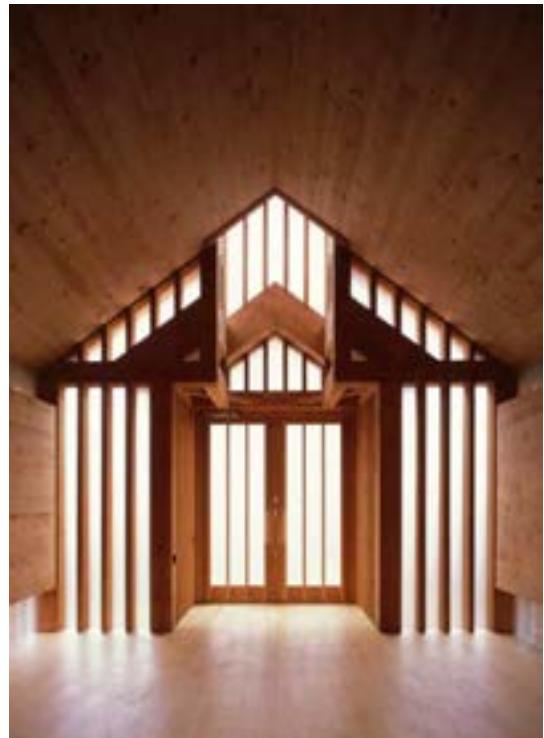

© Hélène Binet



© Joakim Boren

2016

Public & Civic

## BELARUSIAN MEMORIAL CHAPEL

The Holy See of Rome co. Diocese of Westminster

**LOCATION**  
London Borough of  
Barnet

**HEIGHT / STOREYS**  
39 ft (12 m) / 1 storeys

**CONSTRUCTION COST**  
Undisclosed

**ARCHITECT**  
Spheron Architects

**STRUCTURAL ENGINEER**  
Timberwright

**TIMBER ENGINEER**  
Timberwright

**TIMBER CONTRACTOR**  
Timberwright

**TIMBER MANUFACTURER**  
EgoIn

**MAIN CONTRACTOR**  
Timberwright

**TIMBER VOLUME**  
1,900 ft<sup>3</sup> (53 m<sup>3</sup>)

**TIMBER ASSEMBLY**  
2 days

**OVERALL CONSTRUCTION**  
52 weeks

**STRUCTURE TYPE**  
Pure Timber

**EMBODIED CARBON  
WITHIN TIMBER\***  
-32 tons (-29 tonnes) CO<sub>2</sub>e


**CLT FACT**  
Light weight CLT avoided  
damage to the roots of  
adjacent protected trees

The church in Woodside Park has been built for the Belarusian diaspora community in the UK, and is dedicated to the memory of victims of the 1986 Chernobyl nuclear disaster. Inspired by Belarus' wooden church tradition the domed spire and timber shingle roof are common features of hundreds of traditional churches in Belarus.

A series of contemporary twists to the traditional form, such as the undulating timber frill of the flank wall enlivens the exterior. Natural light enters through low-level and concealed clerestory windows running the length of the chapel, and through tall frosted windows on the front elevation.

There are no additional finishes to the walls and structural frame, and the floor planks are made of Douglas Fir, all of which gives a distinctive smell to the interior. Externally, weather boards clad the CLT with vertical capping fins running along their joints. These fins are cut at slightly different angles to give an undulating profile, made up of only five simple variations without any use of computer generated algorithm.

The carefully coordinated, hidden location of the services, means that there is minimal impact on the beautiful clean lines of the interior structure and architecture.

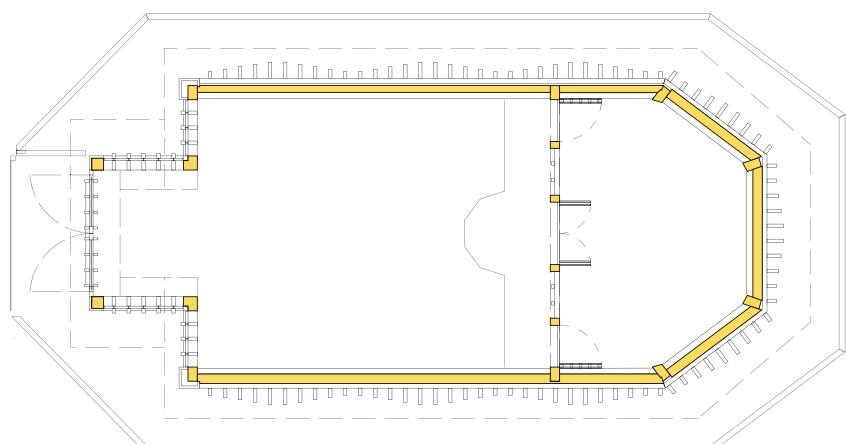

©

Ground Floor Plan



© Jim Stephenson

2017      Public & Civic  
**THE GATEWAY BUILDINGS**  
 Weald and Downland Living Museum

**LOCATION**  
 Chichester, West Sussex

**HEIGHT / STOREYS**  
 24 ft (7.2 m) / 1 storeys

**CONSTRUCTION COST**  
 £2.9 million

**ARCHITECT**  
 ABIR Architects

**STRUCTURAL ENGINEER**  
 Cooper and Withycombe

**TIMBER ENGINEER**  
 KLH UK

**TIMBER CONTRACTOR**  
 KLH UK

**TIMBER MANUFACTURER**  
 KLH Massivholz

**MAIN CONTRACTOR**  
 A&F Pilbeam Construction

**TIMBER VOLUME**  
 12,700 ft<sup>3</sup> (359 m<sup>3</sup>)



**TIMBER ASSEMBLY**  
 5 weeks

**OVERALL CONSTRUCTION**  
 60 weeks

The new visitor centre is designed around the idea of a farmstead village cluster and opens views and connections into the museum. Two new building clusters set either side of an entrance court provide a transitional threshold or 'gateway' between the new facilities (retail, café, community spaces) and the museum which consists of a collection of preserved historic vernacular buildings from South East England. To replicate any one style or period from the exhibits would have been inappropriate however a common theme of timber frame and materiality was established.

The new buildings combine traditional building materials with modern timber structures, detailing and construction techniques, sympathetic to and appropriate for their setting, they reflect and transcend some of the qualities of the collection. The timber frame references its historic counterparts whilst marrying the traditional with modern technology. Sizable sections of Green Oak connected through exposed stainless steel components express the materials and provide a clear understanding of the structural composition with flying structural members and kite ceilings.

The galleries and café spaces are constructed from CLT panels while externally 60,000 locally sourced hand-cleft timber shingles to the roofs are aligned with sweet chestnut cladding, Keymer Tiles and black-seamed zinc.

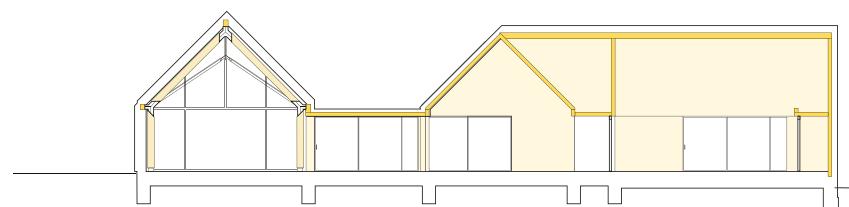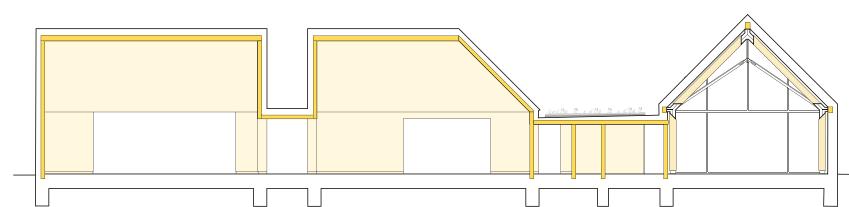


**STRUCTURE TYPE**  
 Pure Timber


**EMBODIED CARBON WITHIN TIMBER\***  
 -224 tons (-203 tonnes) CO<sub>2</sub>e

**CLT FACT**  
 CLT used in modern interpretation of historic timber structures

Sections

# TIMELINE

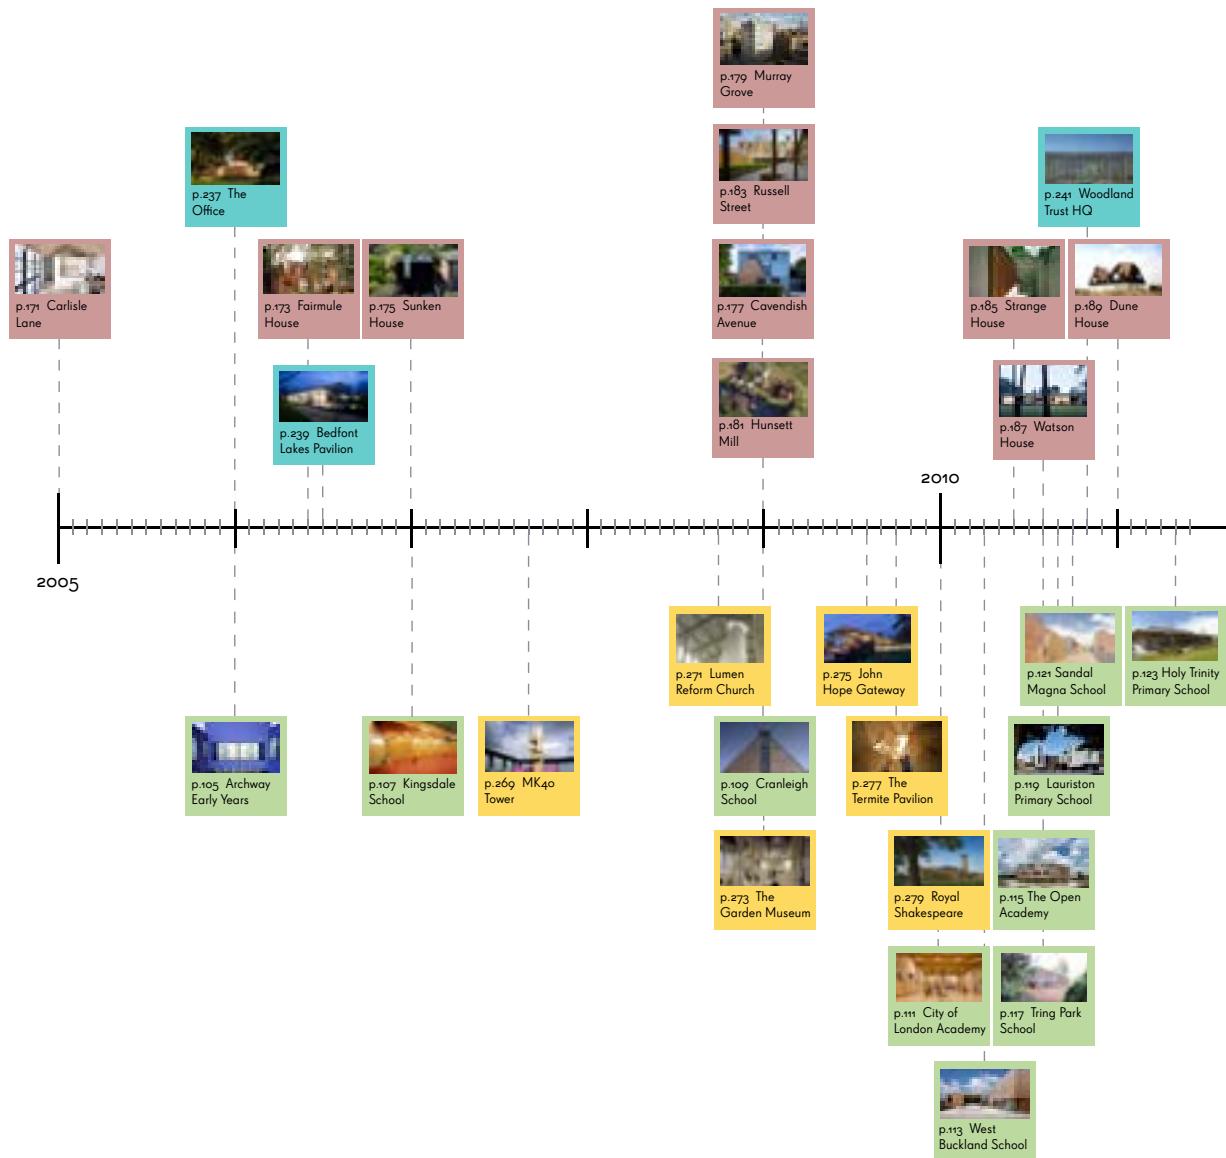

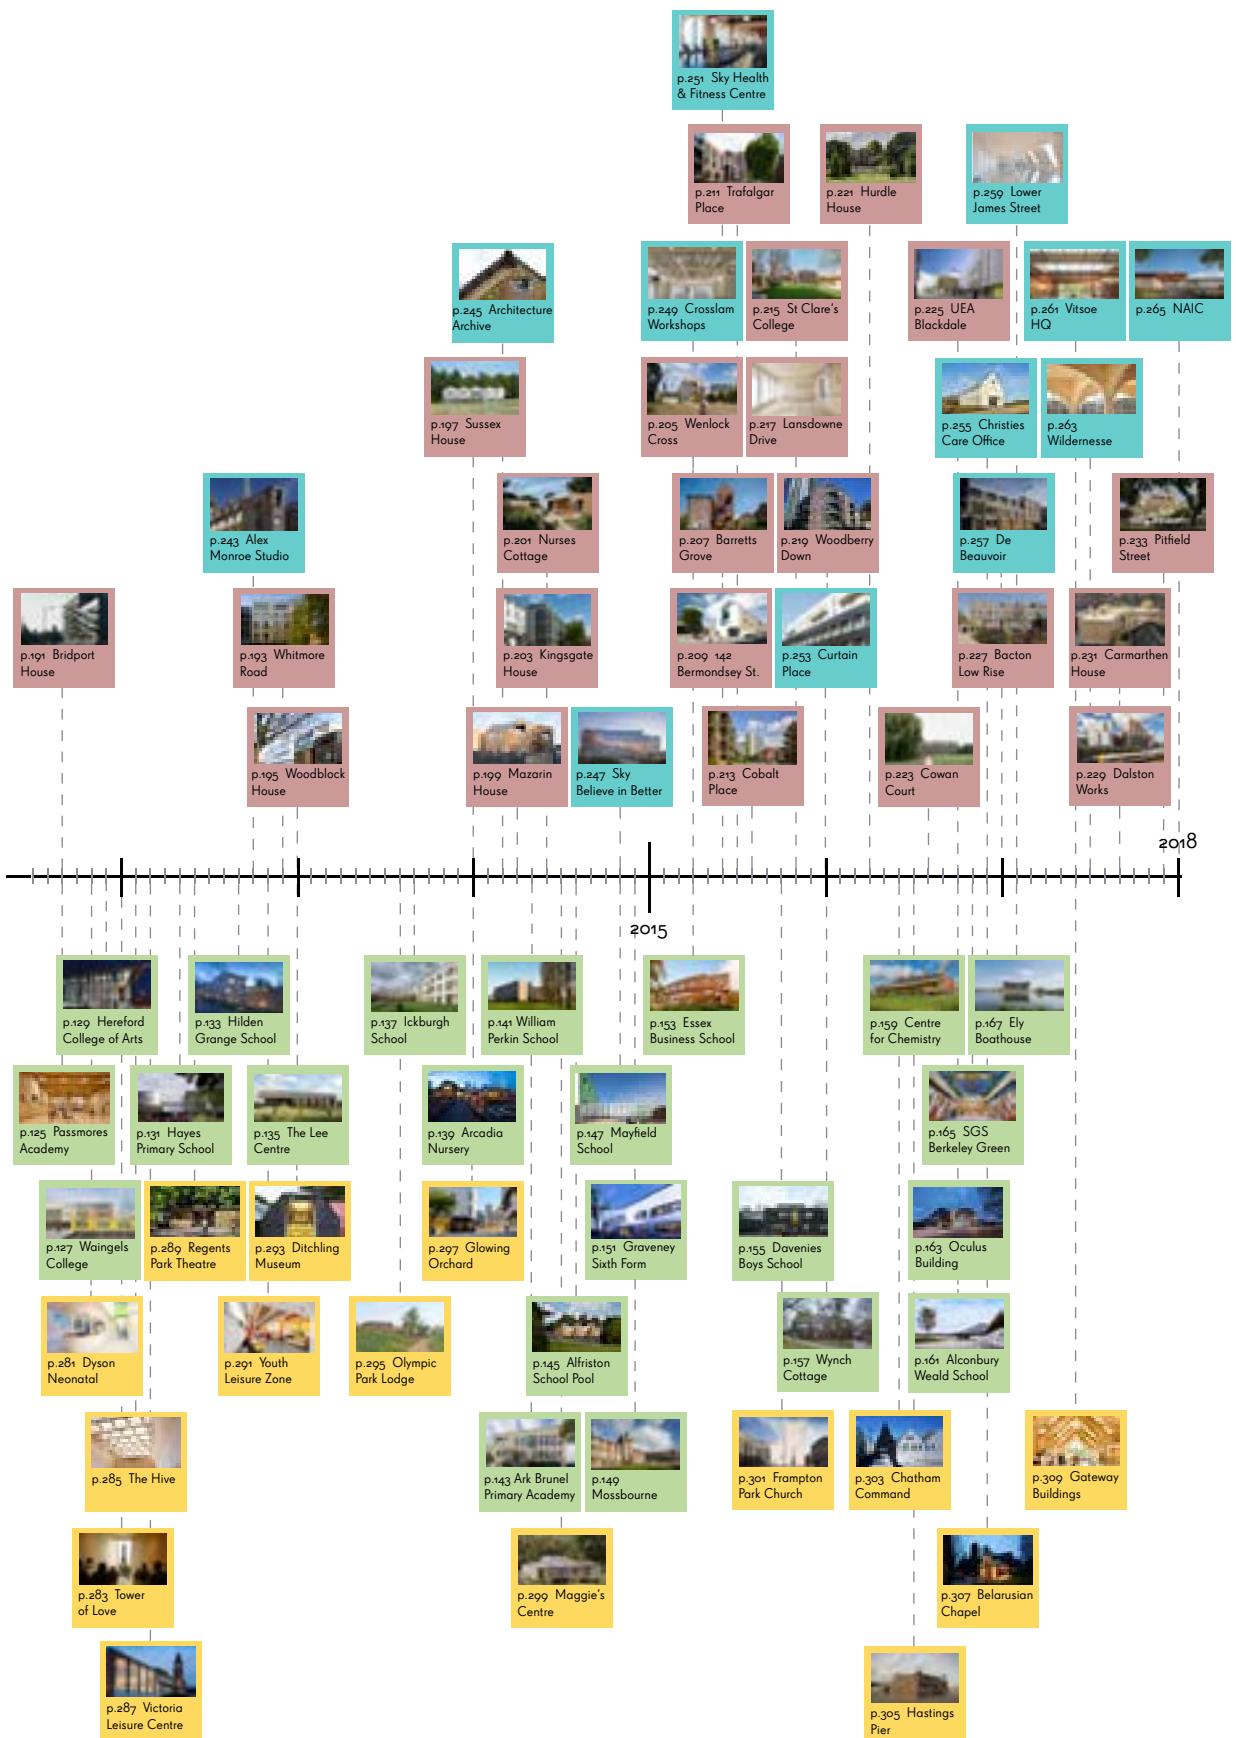



# CONCLUSION

The one hundred projects featured in this book were selected from over 500 completed CLT projects in the UK. The scale and variety of buildings in CLT demonstrates that the era of engineered timber is now upon us.

We often refer to human civilisations by the principal materials they employ, such as the Bronze Age, Iron Age etc. In this vein, the 20th century can be very much called the Concrete Age and it seems very likely that the 21st century will be the Timber Age.

The adoption of engineered timber technology in construction mirrors the emergence of concrete a hundred years ago. An ancient building material, brought into modern use through enhanced engineering, the first practitioners of which chose to mimic the forms from the existing building technologies. As the use of this new material became more widespread and the capabilities became better understood, a new architecture emerged expanding the engineering possibilities concrete offered. Ultimately, a new urbanism developed, that had its impact on most cities of the world.

The hundred projects featured in this book already chart an emergence of a new architecture that owes its form to the possibilities offered by engineered timber. With the technology still in its infancy, one can only speculate as to the new forms that will emerge as the use of CLT becomes mainstream.

The tectonic expression of mass timber is still developing. New technologies demand new forms. For centuries, material innovation has been a means with which to revitalize the traditions of architecture.

As the greater use of timber in construction mirrors a changing attitude towards our planet and our living environment, the new urbanism of timber should offer us new ways of working and living together.

Image: Murray Grove, Waugh Thistleton Architects © Will Pryce



# GLOSSARY

Air Tightness Line - a notional line completely enclosing a building defining the point at which airtightness measures are employed.

BIM - Building Information Modelling is a digital representation of the physical and functional characteristics of a building.

BREEAM - Building Research Establishment Environmental Assessment Method, UK certification program.

Carbon Cycle - processes such as photosynthesis, decomposition, and respiration, by which carbon, as a component of various compounds, cycles between its major reservoirs.

Carbon Reservoir / Sink - eg. the atmosphere, oceans, and living organisms which absorb and store large amounts of carbon dioxide from the earth's atmosphere.

Cascade principle - a method of increasing the efficient use of a raw material by giving priority to higher value uses that enables reuse and recycling and promotes energy use only when other options are starting to run out.

CLT - Cross Laminated Timber

CML - Council for Mortgage Lenders

CNC - Computerized Numerical Control, drilling and machining tool controlled via digital input.

Co-ordinated Drawings - a stage of building design where the structure, finishes and services are completely integrated.

Collaborative Design - the close working and partnership of all consultants and contractors in the design and construction of a building, often facilitated by BIM.

Critical path - The longest sequence of activities in a project plan which must be completed on time for the project to complete on due date.

De-lamination - for CLT, where glued layers separate, either through the action of moisture or fire.

Design Freeze - at key stages of a project the design is signed off and is fixed from that point.

Dew Point - the temperature at which water vapor in the air condenses into liquid water.

EFA - Education Funding Agency

Embodied Carbon - carbon dioxide emitted during the manufacture, transport and construction of a building materials, together with end of life emissions.	Heat degradation - deterioration of a material as a result of excessive heat.
Encapsulation - the approach of protecting building elements by the application of fire lining.	Hydraulic press - more common method of CLT production, utilizing hydraulic rams for the gluing of the timber laminas.
End grain - the grain of wood seen when it is cut across the growth rings.	Impact Sound - sound arising from the impact of an object on a building element, such as footsteps.
Engineered Timber/Mass Timber - a generic name incorporating CLT, glulam, LVL and others.	Just-in-time delivery - strategy of receiving materials on site only as they are required, reducing requirements for storage.
EPD - Environmental Product Declaration	LCA - Life Cycle Assessment
Finger Jointed - in CLT manufacture, method by which boards are joined end to end by cutting an extended sawtooth to both boards and then gluing.	Lead-in Period - the time required between placing an order for an item and delivery to site.
Fire Integrity - the duration for which a building element or system can withstand a standard fire resistance test.	LEED - Leadership in Energy and Environmental Design, US certification system run by the U.S. Green Building Council.
Flanking Sound - sound transmitted between spaces indirectly, going over or around, rather than directly through a floor or wall.	Listed Building - one that is deemed of historic interest and is legally protected. Special permission from the local planning authority is required for any work to be carried out. They range from Grade II: special interest, Grade II* ("grade two star"): more than special interest and Grade I: exceptional interest.
Follow-on-trades - refers to the activities that follow erection of a structural frame such as running services or lining out.	LVL - Laminated Veneer Lumber
FSC - Forest Stewardship Council	Mitigated Carbon - savings in carbon dioxide emissions from active measures aimed at reduction or prevention.
Operational Carbon - carbon dioxide emitted during the life of a building, through heating, cooling, lighting, and power.	Moisture content - ratio of the mass of water in a material to the mass of solid.
Glulam - Glue Laminated Timber	

MUF - Melamine urea formaldehyde resin is an adhesive thermosetting resin.

NHBC - National House Building Council, provides construction inspection services and 10 year warranties to UK housing developments.

NIA - net internal area.

PEFC - Program for the Endorsement of Forest Certification

Phase change material - a substance capable of storing and releasing large amounts of energy through melting and solidifying at a certain temperature.

Progressive Collapse - also known as Disproportionate Collapse, refers to when a primary structural element fails that results in the failure of adjoining structural elements, which in turn causes further structural failure.

PUR - polyurethane is type of hot melt glue that polymerizes when applied so that they form much stronger bonds than traditional hot melts.

Sequestered Carbon - the process of capture and the long-term storage of atmospheric carbon dioxide to mitigate global warming.

Service use class - a rating of 1 to 5 that identifies the recommended exposure of timber to water in use based on the characteristics of the timber itself and treatments applied.

SIPs - Structural insulated panels are a high performance building system for residential and light commercial construction.

Smoke modelling - method of simulating the behavior and temperature of smoke in the event of a fire.

Strength to weight ratio - a material's strength (force per unit area at failure) divided by its density.

Thermal Conductivity - the rate at which heat passes through a specified material, expressed as the amount of heat that flows per unit time through a unit area with a temperature gradient of one degree per unit distance.

Thermal storage capacity / Thermal Mass - the ability of a material to absorb and store heat energy. Dense materials such as brick and concrete have a high thermal mass, whereas timber has a low thermal mass.

Timber frame - traditional construction method creating framed structures from solid timber members.

UN - United Nations

Vacuum press - an alternative method of producing CLT panels by evacuating the air under a rubber based sheet.

Vapor Control Layer - a vapor tight membrane installed to a roof or wall on the inside face.

Vapor Permeable Membrane - restricts the amount of water that can pass through but does not block it, helping reduce the build-up of condensation within a structural element.

VOC - Volatile Organic Compound

N1645		
620	54648	H1678
N4629	N1699	N1661
652	21646	A4619
H1661	71607	7562
687	A1669	H1665
74632	75662	7567
691	40690	51619
H1663	11608	1A6
578	H1651	N2633
47655	71606	H170
669	1H640	24550
H1629	71583	726
677	5H710	5A634

# METHODOLOGY

## \* EMBODIED CARBON METHODOLOGY

The embodied carbon (cradle to site) figures for each case study were calculated via the below methodology, using the sources listed. The timber volumes and delivery numbers were sourced from the architects or timber suppliers/manufacturers and the distances between the factories and sites calculated on <https://www.distancecalculator.net> as via road transport.

Sequestered carbon and CLT production embodied carbon:

$$\text{Input} = \text{Timber Volume (m}^3\text{)} = X$$

$$A = \text{Sequestered carbon} = X \times -790\text{kg CO}_2 \text{ (ASBP)}$$

$$B = \text{Processing embodied carbon} = X \times 190\text{kg CO}_2 \text{ (ASBP)}$$

$$A + B = \text{Cradle-to-Gate embodied carbon} = X \times -600\text{kg CO}_2 \text{ (ASBP)}$$

$$= -600X \text{ kg CO}_2$$

Transportation of CLT:

$$\text{Input} = \text{Number of Deliveries} = Y$$

$$\text{Average Distance} = Z \text{ km}$$

$$\text{Fuel Consumption} = 0.44 \text{ L/km (DEFRA)}$$

$$\text{Carbon impact of fuel} = 2.63 \text{kg CO}_2/\text{L (Department of the Environment, Food and Rural Affairs, 2007)}$$

$$0.44Z \times 2.63 = 1.157Z \text{ kg CO}_2 \text{ per delivery}$$

$$Y \times 1.157Z \text{ kg CO}_2 = 1.157YZ \text{ kg CO}_2$$

Overall Embodied Carbon:

$$-600X \text{ kg CO}_2 + 1.157YZ \text{ kg CO}_2 = \text{Embodied Carbon (cradle-to-site)}$$



# B I B L I O G R A P H Y

While there is already a considerable amount of literature on cross-laminated timber, the range of references is growing constantly. A regularly updated and comprehensive list of books, press articles and technical guidance can be found at [www.wt-x.net/publications](http://www.wt-x.net/publications).

The list below is a selection of the principal reference documents on CLT and building in mass timber.

Michael Green, **The Case for Tall Wood Buildings**, Blurb, 2018

Sylvain Gagnon and Ciprian Pirvu (ed.), **CLT handbook: cross-laminated timber**, FP Innovations and Binational Softwood Lumber Council, 2011

Ireneusz Bejtka, **Cross (CLT) and diagonal (DLT) laminated timber as innovative material for beam elements**, KIT Scientific Publishing, 2011

Andy Sutton and Daniel Black, **Cross-Laminated Timber, An introduction to low-impact building materials**, BRE Press, 2011

Various, **Cross-laminated timber, Design and Performance**, Exova BM TRADA, 2017

Virginia McLeod, **Detail in Contemporary Timber Architecture**, Laurence King Publishing, 2010

Johannes Hummel, **Displacement-based seismic design for multi-storey cross laminated timber buildings**, Kassel University Press, 2017

Simone Jeska, **Emergent Timber Technologies - Materials, Structures, Engineering Projects**, Birkhauser, 2015

Petter Bergerud, **Experimental Wooden Structures**, Bergen Academy of Art and Design, 2015

Jim Birkemeier, **Home Made Timer Panels - How We Make Cross Laminated Timber Panels From Our Trees at Timbergreen Farm**, Amazon, 2107

Peter Wilson, **The Modern Timber House in the UK**, Wood for Good, 2018

Robert Hairstans, **Mass Timber - an Introduction to Solid Laminate Timber Systems**, Arcamedia, 2018

Susan Jones, **Mass Timber: Design and Research**, Oro Editions, 2018

Lars Mytting, **Norwegian Wood - Chopping, Stacking and Drying Wood the Scandinavian Way**, Maclehose Press, 2015

Andrew Waugh, Karl Heinz Weiss, Matthew Wells, **A Process Revealed / Auf Dem Holzweg**, Murray & Sorrell FUEL, 2009

Joseph Mayo, **Solid Wood: Case Studies in Mass Timber Architecture, Technology and Design**, Routledge ,2015

Jack Porteous and Andy Kermani, **Structural Timber Design to Eurocode 5**, Wiley-Blackwell, 2nd Edition, 2013

James Norman, **Structural timber elements, a pre-scheme guide**, Exova BM TRADA, 2016

Andrew Bernheimer (ed.), **Timber in the City: Design and Construction in Mass Timber**, Oro Editions ,2015

Michael Dickson, **Sustainable Timber Design**, Routledge ,2015

Josef Kolb, **Systems in Timber Engineering**, Birkhäuser, 2018

Michael Green, Jim Taggart, **Tall Wood Buildings - Design Construction and Performance**, Birkhäuser, 2017

Ulrich Daniel, **Turning Point in Timber Construction - A New Economy**, Birkhäuser, 2016

United Nations, **World Urbanization Prospects**, The 2014 Revision, Highlights (New York, United Nations, 2014)





Over the last 15 years the UK has experienced a quiet revolution in construction. Since the modest efforts of the first small buildings in the early 2000s a blossoming array of CLT projects has emerged across a range of building types and scales. In 2017, three out of the five buildings nominated for the Stirling Prize, the UK's top architecture award, were constructed from CLT. Engineered timber buildings are now firmly part of our construction landscape.

This book presents the case for using engineered timber with one hundred studies encompassing a wide range of scales, styles and types.

Also included is a compendium outlining the benefits of CLT along with the considerations for designing and building in this revolutionary material.

